

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22076 A1

(51) International Patent Classification⁷: **G01N 27/90**,
G01B 7/16

(71) Applicant: **JENTEK SENSORS, INC.** [US/US]; 110-1
Clematis Avenue, Waltham, MA 02453-7013 (US).

(21) International Application Number: PCT/US00/25690

(72) Inventors: **GOLDFINE**, Neil, J.; 141 Evelyn Road,
Newton, MA 02468 (US). **SCHLICKER**, Darrell, E.;
100 Waverly Avenue, Watertown, MA 02472 (US).
WASHABAUGH, Andrew, P.; 1413 Granite Springs
Drive, Chula Vista, CA 91915 (US). **ZILBERSTEIN**,
Vladimir; 145 Bellingham Road, Chestnut Hill, MA
02467 (US). **TSUKERNIK**, Vladimir; 206 Mount Ver-
non Street, West Roxbury, MA 02132 (US).

(22) International Filing Date:
20 September 2000 (20.09.2000)

(25) Filing Language: English

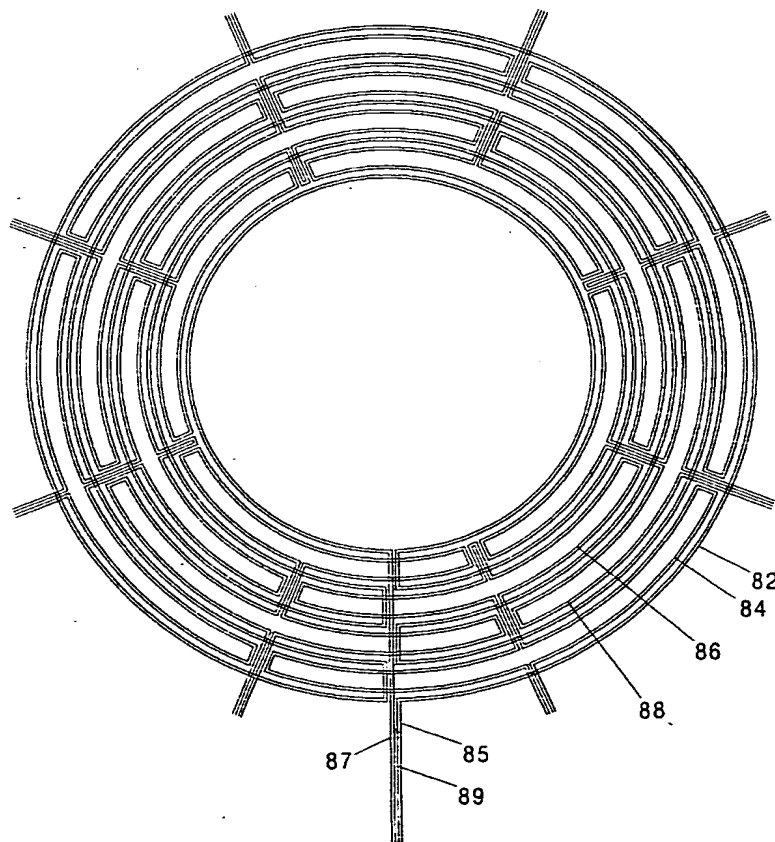
(26) Publication Language: English

(30) Priority Data:
60/155,038 20 September 1999 (20.09.1999) US
60/203,744 12 May 2000 (12.05.2000) US
09/656,723 7 September 2000 (07.09.2000) US

(74) Agents: **SMITH, James, M.** et al.; Hamilton, Brook,
Smith & Reynolds, P.C., 530 Virginia Road, P.O. Box
9133, Concord, MA 01742-9133 (US).

[Continued on next page]

(54) Title: EDDY-CURRENT SENSOR ARRAYS



(57) Abstract: Inductive sensors measure the near surface properties of conducting and magnetic material. A sensor may have primary windings with parallel extended winding segments to impose a spatially periodic magnetic field in a test material. Those extended portions may be formed by adjacent portions of individual drive coils. Sensing elements provided every other half wavelength may be connected together in series while the sensing elements in adjacent half wavelengths are spatially offset. Certain sensors include circular segments which create a circularly symmetric magnetic field that is periodic in the radial direction. Such sensors are particularly adapted to surround fasteners to detect cracks and can be mounted beneath a fastener head. In another sensor, sensing windings are offset along the length of parallel winding segments to provide material measurements over different locations when the circuit is scanned over the test material. The distance from the sensing elements to the ends of the primary winding may be kept constant as the offset space in between sensing elements is varied. An image of the material properties can be provided as the sensor is scanned across the material.

WO 01/22076 A1



(81) Designated States (national): AE, AG, AL, AM, AT, AU, Published:

AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

— with international search report

(48) Date of publication of this corrected version:

10 January 2002

(15) Information about Correction:

see PCT Gazette No. 02/2002 of 10 January 2002, Section II

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

EDDY-CURRENT SENSOR ARRAYS

BACKGROUND OF THE INVENTION

The technical field of this invention is that of nondestructive materials characterization, particularly quantitative, model-based characterization of surface, near-surface, and bulk material condition for flat and curved parts or components using eddy-current sensors. Characterization of bulk material condition includes (1) measurement of changes in material state caused by fatigue damage, creep damage, thermal exposure, or plastic deformation; (2) assessment of residual stresses and applied loads; and (3) assessment of processing-related conditions, for example from shot peening, roll burnishing, thermal-spray coating, or heat treatment. It also includes measurements characterizing material, such as alloy type, and material states, such as porosity and temperature. Characterization of surface and near-surface conditions includes measurements of surface roughness, displacement or changes in relative position, coating thickness, and coating condition. Each of these also includes detection of electromagnetic property changes associated with single or multiple cracks. Spatially periodic field eddy-current sensors have been used to measure foil thickness, characterize coatings, and measure porosity, as well as to measure property profiles as a function of depth into a part, as disclosed in U.S. Pat. Nos. 5,015,951 and 5,453,689.

Conventional eddy-current sensing involves the excitation of a conducting winding, the primary, with an electric current source of prescribed frequency. This produces a time-varying magnetic field at the same frequency, which in turn is detected with a sensing winding, the secondary. The spatial distribution of the magnetic field and the field measured by the secondary is influenced by the proximity and physical properties (electrical conductivity and magnetic permeability) of nearby materials. When the sensor is intentionally placed in close proximity to a test material, the physical properties of the material can be deduced from measurements of the impedance between the primary and secondary windings.

Traditionally, scanning of eddy-current sensors across the material surface is then used to detect flaws, such as cracks.

For the inspection of structural members in an aircraft, power plant, etc., it is desirable to detect and monitor material damage, crack initiation and crack growth due to fatigue, creep, stress corrosion cracking, etc. in the earliest stages possible in order to verify the integrity of the structure. This is particularly critical for aging aircraft, where military and commercial aircraft are being flown well beyond their original design lives. This requires increased inspection, maintenance, and repair of aircraft components, which also leads to escalating costs. For example, the useful life of the current inventory of aircraft in the U.S. Air Force (e.g., T-38, F-16, C-130E/H, A-10, AC/RC/KC-135, U-2, E-3, B-1B, B-52H) is being extended an additional 25 years at least [Air Force Association, 1997, Committee, 1997]. Similar inspection capability requirements also apply to the lifetime extension of engine components [Goldfine, 1998].

Safely supporting life extension for structures requires both rapid and cost effective inspection capabilities. The necessary inspection capabilities include rapid mapping of fatigue damage and hidden corrosion over wide areas, reduced requirements for calibration and field standards, monitoring of difficult-to-access locations without disassembly, continuous on-line monitoring for crack initiation and growth, detection of cracks beneath multiple layers of material (e.g., second layer crack detection), and earlier detection of cracks beneath fastener heads with fewer false alarms. In general, each inspection capability requires a different sensor configuration.

The use of eddy-current sensors for inspection of critical locations is an integral component of the damage tolerance and retirement for cause methods used for commercial and military aircraft. The acceptance and successful implementation of these methods over the last three decades has enabled life extension and safer operation for numerous aircraft. The corresponding accumulation of fatigue damage in critical structural members of these aging aircraft, however, is an increasingly complex and continuing high priority problem. Many components that were originally designed to last the design life of the aircraft without experiencing cracking (i.e., safe life components) are now failing in service, both because aircraft

-3-

remain in service beyond original design life and, for military aircraft, because expanded mission requirements expose structures to unanticipated loading scenarios. New life extension programs and recommended repair and replacement activities are often excessively burdensome because of limitations in technology available today
5 for fatigue detection and assessment. Managers of the Aircraft Structural Integrity Program (ASIP) are often faced with difficult decisions to either replace components on a fleet-wide basis or introduce costly inspection programs.

Furthermore, there is growing evidence that (1) multiple site damage or multiple element damage may compromise fail safety in older aircraft, and (2)
10 significant fatigue damage, with subsequent formation of cracks, may occur at locations not considered critical in original fatigue evaluations. In application of damage tolerance, inspection schedules are often overly conservative because of limitations in fatigue detection capability for early stage damage. Even so, limited inspection reliability has led to numerous commercial and military component
15 failures.

A better understanding of crack initiation and short crack growth behavior also affects both the formulation of damage tolerance methodologies and design modifications on new aircraft and aging aircraft. For safe-life components, designed to last the life of the aircraft, no inspection requirements are typically planned for the
20 first design life. Life extension programs have introduced requirements to inspect these "safe-life" components in service since they are now operating beyond the original design life. However, there are also numerous examples of components originally designed on a safe-life basis that have failed prior to or near their originally specified design life on both military and commercial aircraft.

25 For safe-life components that must now be managed by damage tolerance methods, periodic inspections are generally far more costly than for components originally designed with planned inspections. Often the highest cost is associated with disassembly and surface preparation. Additionally, readiness of the fleet is directly limited by time out of service and reduced mission envelopes as aircraft age
30 and inspection requirements become more burdensome. Furthermore, the later an inspection uncovers fatigue damage the more costly and extensive the repair, or the more likely replacement is required. Thus, inspection of these locations without

disassembly and surface preparation is of significant advantage; also, the capability to detect fatigue damage at early stages can provide alternatives for component repair (such as minimal material removal and shotpeening) that will permit life extension at a lower cost than current practice.

- 5 In general, fatigue damage in metals progresses through distinct stages. These stages can be characterized as follows [S. Suresh, 1998]: (1) substructural and microstructural changes which cause nucleation of permanent damage, (2) creation of microscopic cracks, (3) growth and coalescence of these microscopic flaws to form 'dominant' cracks, (4) stable propagation of the dominant macrocrack, and (5)
10 structural instability or complete fracture.

 Although there are differences of opinion within the fatigue analysis community, Suresh defines the third stage as the demarcation between crack initiation and propagation. Thus, the first two of the above stages and at least the initial phase of Stage 3 are generally thought of, from a practical engineering
15 perspective, as the crack initiation phase.

 In Stage 1, microplastic strains develop at the surface even at nominal stresses in the elastic range. Plastic deformation is associated with movement of linear defects known as dislocations. In a given load cycle, a microscopic step can form at the surface as a result of localized slip forming a "slip line". These slip lines
20 appear as parallel lines or bands commonly called "persistent slip bands" (PSBs). Slip band intrusions become stress concentration sites where microcracks can develop.

 Historically, X-ray diffraction and electrical resistivity are among the few nondestructive methods that have been explored for detection of fatigue damage in
25 the initiation stages. X-ray diffraction methods for detection of fatigue damage prior to microcracking have been investigated since the 1930's [Regler, 1937; Regler, 1939]. In these tests, fatigue damage was found to be related to diffraction line broadening. More recently Taira [1966], Kramer [1974] and Weiss and Oshida [1984] have further developed the X-ray diffraction method. They proposed a
30 self-referencing system for characterization of damage, namely the ratio of dislocation densities as measured 150 micrometers below the surface to that measured 10 – 50 micrometers below the surface. The data obtained to date suggest

that in high strength aluminum alloys the probability of fatigue failure is zero for dislocation density ratios of 0.6 or below. However, it is generally impractical to make such measurements in the field.

Electrical resistivity also provides a potential indication of cumulative
5 fatigue damage. This is supported by theory, since an increase in dislocation density results in an increase in electrical resistivity. Estimates suggest that, in the case of aluminum, depending on the increase in the density of dislocations in the fatigue-damage zone, the resistivity in the fatigue-affected region may increase by up to 1% prior to formation of microcracks. These estimates are based on
10 dislocation densities in the fatigue-damage zone up to between $2(10^{11} \text{ cm}^{-2} \text{ to } 10^{12} \text{ cm}^{-2})$ and a resistivity factor of $3.3(10^{-19} \text{ ((cm}^3 \text{ [Friedel, 1964])})$.

SUMMARY OF THE INVENTION

Aspects of the inventions described herein involve novel inductive sensors for the measurement of the near surface properties of conducting and magnetic
15 materials. These sensors use novel winding geometries that promote accurate modeling of the response, eliminate many of the undesired behavior in the response of the sensing elements in existing sensors, provide increased depth of sensitivity by eliminating the coupling of spatial magnetic field modes that do not penetrate deep into the material under test (MUT), and provide enhanced sensitivity for crack
20 detection, localization, crack orientation, and length characterization. The focus is specifically on material characterization and also the detection and monitoring of precrack fatigue damage, as well as detection and monitoring of cracks, and other material degradation from testing or service exposure.

Methods are described for forming eddy current sensors having primary
25 windings for imposing a spatially periodic magnetic field into a test material. In one embodiment, the primary winding incorporates parallel extended winding segments formed by adjacent extended portions of individual drive coils. The drive coils are configured so that the current passing through adjacent extended winding segments is in a common direction and a spatially periodic magnetic field is imposed in the
30 MUT. In another embodiment a single meandering conductor having extended portions in one plane is connected in series to another meandering conductor in a

second plane. The conducting meanders are spatially offset from one another so that the current passing through adjacent extended winding segments is again in a common direction.

For sensing the response of the MUT to the periodic magnetic field, sensing elements are located within the primary winding. In one embodiment, the sensing elements have extended portions parallel to the extended portions of the primary winding and link incremental areas of magnetic flux within each half meander. The sensing elements in every other half-wavelength are connected together in series while the sensing elements in adjacent half wavelengths are spatially offset, parallel to the extended portions of the primary. The sensor can be scanned across the surface of the MUT to detect flaws or the sensor can be mounted on a part for detecting and determining the location of a flaw. Preferably, the longest dimension of the flaw will be substantially perpendicular to the extended portions of the primary winding.

Methods are also described for forming circular eddy current sensors having primary windings for imposing a spatially periodic magnetic field into a test material. The spatial pattern can be created from a plurality of concentric circular segments, where current flow through these segments creates a substantially circularly symmetric magnetic field that is periodic in the radial direction. The response of the MUT to the magnetic field is detected with one or more sensing elements placed between each concentric loop.

The extended portions of each sensing element are concentric with the concentric circular segments of the primary winding. The sensing elements may also be in a different plane than the primary winding. These windings may also form a substantially closed loop other than as a circle to follow a contour in the material under test.

The sensing elements can be distributed throughout the primary winding meanders. In one embodiment, a single sensing element is placed within each half wavelength of the primary winding. Separate output connections can be made to each sensing element, to create a sensor array. The sensing elements can be connected together to provide common output signals. In another embodiment, the sensing elements can link areas of incremental flux along the circumference of the

primary winding segments. The sensing elements can have the same angular dimensions and, in every other half wavelength can be connected together in series to provide a common output. These are examples of circular spatially periodic field eddy-current sensors. These circular sensors can be used in either a surface mounted
5 or scanning mode.

Another embodiment of an imaging sensor includes a primary winding of parallel extended winding segments that impose a spatially periodic magnetic field, with at least two periods, in a test substrate when driven by electric current. The array of sensing windings for sensing the response of the MUT includes at least two
10 of the sensing windings in different half-wavelengths of the primary winding. These sensing windings link incremental areas of the magnetic flux and are offset along the length of the parallel winding segment to provide material response measurements over different locations when the circuit is scanned over the test material in a direction perpendicular to the extended winding segments. To minimize unmodeled
15 effects on the response, extra conductors can be placed at the ends of the sensing elements and within the endmost primary winding meanders, and the sensing elements can be spaced at least a half-wavelength from the ends of the primary winding. In addition the distance from the sensing elements to the ends of the primary winding can be kept constant as the offset spacing between sensing
20 elements within a single meander is varied.

An image of the material properties can be obtained when scanning the sensor in a direction perpendicular to the extended portions of the primary winding. The sensing elements can provide absolute or differential responses, which can provide a difference in MUT properties parallel to, perpendicular to, or at an
25 intermediate angle to the extended portions of the primary winding.

The spatially periodic sensors can be fabricated onto flexible, conformable substrates for the inspection of curved parts. Alternatively, the sensors can be mounted on hard flat or curved substrates for non-contact scanning. Protective or sacrificial coatings can also be used to cover the sensor.

30 The sensors can be mounted against article surfaces for the detection of flaws. The nominal operating point can be varied to calibrate the sensor or provide additional information for the property measurement. For example, the sensor

lift-off, the MUT temperature, and the MUT permeability can be varied.

Measurement grids or databases can be used to determine the electrical and geometric properties of interest at the location measured by each sensing element.

The electrical or geometric properties can also be correlated to other properties of interest for the MUT, such as crack size or depth. Multiple frequency measurements
5 can also be performed to determine property variations with depth from the surface of the MUT.

In one embodiment, damage near fasteners can be monitored with spatially periodic field eddy-current sensors. The sensor should be mounted near the fastener
10 so that damage in the MUT can be detected through changes in the electrical properties measured with the sensor. The sensor can be mounted beneath the fastener head, between structural layers attached by the fastener, or at both ends of the fastener. The damage may be in the form of a crack. Circular spatially periodic sensors having hollow center regions can surround fasteners to detect and locate
15 damage that may emanate radially. Mounted on, or within a cylindrical support material in the form of a washer facilitates mounting under a fastener head. The support material may also support compressive loads. The damage from nearby fasteners can be monitored simultaneously with multiple sensors. Each sensor can have a single, absolute output, or pairs of sensor responses can be used to provide
20 differential responses. Similarly, for multiple sensors, the drive conductors may be connected with a common drive signal or the sense conductors may be connected together for a common output connection.

Methods are also described for creating databases of measurement responses for multiple layer sensors and using these databases for converting sensor responses
25 into properties of the MUT. The responses can be determined from analytical, finite difference, or finite element models.

Capabilities for monitoring fatigue damage as it occurs on test articles also provide novel methods for fabricating fatigue standards. Attaching an electromagnetic sensor that provides an absolute measurement of the electrical
30 properties during mechanical loading or fatigue testing allows the material condition to be monitored as the damage occurs. Monitoring of the changes in the electrical properties then allow for the load to be removed at prescribed levels of damage. The

damage can take the form of a fatigue crack or pre-crack damage. Once the crack has formed, the sensor can be used to monitor the change in crack length with the number of fatigue cycles. Multiple frequency measurements can provide a measure of crack depth. These changes in material properties can be monitored with multiple
5 sensors to cover several inspection areas and create spatial images of the damage. In one embodiment the sensor is a spatially periodic field eddy current sensor and the MUT is a metal. Alternatively, the sensor could be a dielectrometer and the MUT a dielectric material or composite. In another embodiment either eddy current sensors or dielectrometers can be mounted under patches or bonded repairs.

10 For the fabrication of fatigue standards, the geometry of the fatigue articles can be altered to shape the stress distribution so that the fatigue damage initiates underneath the sensor. This can be accomplished by thinning the center section of typical dogbone specimens, by providing reinforcement ribs on the edges of the specimen to prevent edge cracks from forming, and by providing radius cutouts on
15 the sides of the thinned center section.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which
20 like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

FIG 1 is a plan view of a Meandering Winding Magnetometer sensor.

FIG 2 is an illustration of the MWM measured conductivity dependence on
25 the percent of total fatigue life for Type 304 stainless steel and aluminum alloy 2024.

FIG 3 shows MWM measurement scans along aluminum alloy 2024 hour-glass specimens before and after fatigue testing to various percentages of total fatigue life.

30 FIG 4 is an illustration of two-dimensional MWM measured absolute conductivity scans along the surface of a aluminum alloy 2024 bending fatigue

coupon with extended portions of the windings (a) perpendicular to macrocrack orientation (i.e., perpendicular to the bending moment axis) and (b) parallel to macrocrack orientation.

FIG 5 is an illustration of two-dimensional MWM measured absolute
5 conductivity scans along the surface of a military aircraft component with windings oriented (a) perpendicular and (b) parallel to the bending moment axis.

FIG 6 shows scans of bi-directional magnetic permeability along two austenitic stainless steel specimens. One specimen was not fatigue tested and the other specimen was fatigue tested.

10 FIG 7 is an illustration of multiple frequency measurements on a Boeing 737 fuselage as the MWM is scanned (a) horizontally above the lap joint but beneath the passenger windows and (b) vertically from a window to the lap joint.

FIG 8 is (a) a plan view of a sensing element and MWM-Array with one meandering primary winding and an array of secondary sensing elements with
15 connections to each individual element and (b) an expanded view of the sensor windings.

FIG 9 shows an illustration of six MWM-Arrays mounted inside and on the surface of a fatigue test coupon.

FIG 10 shows an MWM-Array mounted inside a fatigue test coupon.

20 FIG 11 shows an example of the MWM measured conductivity variation with fatigue level.

FIG 12 shows an example of the MWM measured lift-off variation with fatigue level.

FIG 13 shows an example of the MWM measured conductivity variation
25 with early stage fatigue damage.

FIG 14 shows the MWM measured conductivity variation with fatigue cycles for specimens (a) #5, (b) #34, and (c) #32.

FIG 15 shows the MWM measured conductivity variation with sensing element position for specimens (a) #5, (b) #34, and (c) #32.

30 FIG 16 shows an illustration of an algorithm for detection of the onset of fatigue damage using a surface mounted eddy-current sensor.

FIG 17 illustrates the relationship between the MWM measured conductivity changes and crack length estimated from SEM.

FIG 18 shows an engineering drawing for a fatigue specimen having a reduced thickness center section and reinforcement ribs on the sides.

5 FIG 19 shows an engineering drawing for a fatigue specimen having a reduced thickness center section and symmetrical radius cutouts on both sides of the reduced thickness area.

FIG 20 shows an engineering drawing for a fatigue specimen having a reduced thickness center section, reinforcement ribs on the sides, and symmetrical
10 radius cutouts on both sides of the thinned area.

FIG 21 shows (a) a fatigue test configuration with the MWM-Array mounted at a steel fastener installed on the Al 2024 test specimen and (b) a side view of the fatigue test configuration.

FIG 22 is an illustration of the use of an MWM sensor for measuring crack
15 length near a fastener.

FIG 23 is (a) a plan view of a linear MWM-Array for crack detection and determining crack location and (b) an expanded view of a sensing element in the linear MWM-Array.

FIG 24 is (a) a plan view of an MWM-Rosette for crack detection and
20 determining crack circumferential (azimuthal) location and (b) an expanded view of some of the winding connections in an MWM-Rosette.

FIG 25 shows an eddy-current array mounted between layers of a structure.

FIG 26 shows an eddy-current array mounted underneath a fastener.

FIG 27 is (a) a plan view of an MWM-Rosette for crack detection and crack
25 length measurement and (b) an expanded view of some of the winding connections in an MWM-Rosette.

FIG 28 is an illustration of a pair of MWM-Rosettes placed around fastener heads near a corner fitting.

FIG 29 is a schematic plan view of an MWM-Array with staggered positions
30 of secondary elements. On one side the secondary elements are connected individually; the elements on the opposite side of the meandering primary are grouped or connected individually.

FIG 30 shows a plan view of a tapered MWM-Array.

FIG 31 shows an expanded view of an absolute sensing element.

FIG 32 shows an expanded view of a differential sensing element.

FIG 33 shows an expanded view of a differential sensing element.

5 FIG 34 shows an alternative method for connecting to an absolute sensing element.

FIG 35 illustrates an alternative design for a meandering primary winding.

FIG 36 shows a measurement grid for a layered winding design.

FIG 37 illustrates a design for cross-connecting the meanders of the primary
10 winding which greatly reduces the necessary number of bond pad connections.

FIG 38 is (a) a plan view of a multi-layer electrode geometry and (b) an expanded view of the winding segments.

FIG 39 is a plan view of a sensor similar to that shown in FIG 38, except the grouping of sensing elements cover different sections of the meandering primary
15 footprint.

FIG 40 is a schematic plan for a layered primary winding design.

FIG 41 is an illustration of the temperature dependence of the MWM measured electrical conductivity.

FIG 42 is an illustration of the absolute conductivity data from repeated
20 MWM scans in slots (a) 22 and (b) 23 of a Stage 2 fan disk.

FIG 43 is an illustration of the absolute conductivity data from MWM scans in all 46 slots in a Stage 2 fan disk. Arrows indicate slots that had cracks detected by the MWM and UT. Encircled slot numbers denote cracks detected by the MWM but not UT.

25 FIG 44 is an illustration of the normalized conductivity data corresponding to the data of FIG 43.

FIG 45(a) is an illustration of the reduction in the normalized conductivity dependence on crack length for the slots listed in Table 1. Nominal thresholds for crack detection is indicated. (b) provides an expanded view of the response of the
30 smaller cracks.

FIG 46 is a plan view of an alternative embodiment for a linear sensor array.

FIG 47 is a plan view of an alternative embodiment for a linear sensor array.

-13-

FIG 48 shows MWM measurement scans across a "clean" weld and across contaminated titanium welds.

FIG 49 illustrates the effect of shielding gas contamination on the normalized conductivity of titanium welds.

5 FIG 50 illustrates several measurement scans across three engine disk slots, along with nominal detection thresholds.

FIG 51 illustrates the variation in the normalized conductivity due to the formation of cracks in engine disk slots.

10 FIG 52 illustrates the effective relative permeability variation with position along the axis of gun barrel.

FIG 53 illustrates the MWM measured effective relative permeability in two regions and possible behavior between the two regions along the axis of a 25 mm diameter partially overheated gun barrel.

15 FIG 54 illustrates hidden crack detection and sizing in a nickel-based alloy sample, using a two-frequency method.

DETAILED DESCRIPTION OF THE INVENTION

A description of preferred embodiments of the invention follows.

To safely support life extension for aging structures and to reduce weight and maintenance/inspection costs for new structures requires both rapid and cost
20 effective inspection capabilities. In particular, continuous monitoring of crack initiation and growth requires the permanent mounting of sensors to the component being monitored and severely limits the usefulness of calibration or reference standards, especially when placed in difficult-to-access locations on aging or new structures.

25 Permanent and surface mounting of conventional eddy-current sensors is not performed. One reason for this is the calibration requirements for the measurements and another is the variability between probes. Conventional eddy-current techniques require varying the proximity of the sensor (or lift-off) to the test material or reference part by rocking the sensor back and forth or scanning across a surface to
30 configure the equipment settings and display. For example, for crack detection the lift-off variations is generally displayed as a horizontal line, running from right to

left, so that cracks or other material property variations appear on the vertical axis. Affixing or mounting the sensors against a test surface precludes this calibration routine. The probe-to-probe variability of conventional eddy-current sensors prevents calibrating with one sensor and then reconnecting the instrumentation to a second (e.g., mounted) sensor for the test material measurements. Measured signal responses from nominally identical probes having inductance variations less than 2% have signal variations greater than 35% [Auld, 1999]. These shortcomings are overcome with spatially periodic field eddy-current sensors, as described herein, that provide absolute property measurements and are reproduced reliably using micro-fabrication techniques. Calibrations can also be performed with duplicate spatially periodic field sensors using the response in air or on reference parts prior to making the connection with the surface mounted sensor.

The capability to characterize fatigue damage in structural materials, along with the continuous monitoring of crack initiation and growth, has been demonstrated. A novel eddy-current sensor suitable for these measurements, the Meandering Winding Magnetometer Array (MWMTM-Array), is described in U.S. Pat. Nos. 5,015,951, 5,453,689, and 5,793,206. The MWM is a "planar," conformable eddy-current sensor that was designed to support quantitative and autonomous data interpretation methods. These methods, called grid measurement methods, permit crack detection on curved surfaces without the use of crack standards, and provide quantitative images of absolute electrical properties (conductivity and permeability) and coating thickness without requiring field reference standards (i.e., calibration is performed in "air," away from conducting surfaces). The use of the MWM-Array for fatigue mapping and on-line fatigue monitoring has also been described [Goldfine, 1998 NASA]. This inspection capability is suitable for on-line fatigue tests for coupons and complex components, as well as for monitoring of difficult-to-access locations on both military and commercial aircraft.

FIG 1 to FIG 12 illustrate the standard geometry for an MWM sensor and its initial application to fatigue damage measurements. FIG 1 illustrates the basic geometry of the MWM sensor 16, detailed descriptions of which are given in U.S. Pat. Nos. 5,015,951, 5,453,689, and 5,793,206. The sensor includes a meandering

primary winding 10 having extended portions for creating the magnetic field and meandering secondary windings 12 within the primary winding for sensing the response. The primary winding is fabricated in a square wave pattern with the dimension of the spatial periodicity termed the spatial wavelength (λ). A current i_1 is applied to the primary winding and a voltage v_2 is measured at the terminals of the secondary windings. The secondary elements are pulled back from the connecting portions of the primary winding to minimize end effect coupling of the magnetic field and a second set of secondary windings can meander on the opposite side of the primary or dummy elements 14 can be placed between the meanders of the primary to maintain the symmetry of the magnetic field, as described in pending application 09/182,693. The magnetic vector potential produced by the current in the primary can be accurately modeled as a Fourier series summation of spatial sinusoids, with the dominant mode having the spatial wavelength (λ). For an MWM-Array, the responses from individual or combinations of the secondary windings can be used to provide a plurality of sense signals for a single primary winding construct as described in U.S. Patent 5,793,206.

The MWM structure can be produced using micro-fabrication techniques typically employed in integrated circuit and flexible circuit manufacture. This results in highly reliable and highly repeatable (i.e., essentially identical) sensors, which has inherent advantages over the coils used in conventional eddy-current sensors. As indicated by Auld and Moulder, for conventional eddy-current sensors "nominally identical probes have been found to give signals that differ by as much as 35%, even though the probe inductances were identical to better than 2%" [Auld, 1999]. This lack of reproducibility with conventional coils introduces severe requirements for calibration of the sensors (e.g., matched sensor/calibration block sets). In contrast, duplicate MWM sensor tips have nearly identical magnetic field distributions around the windings as standard micro-fabrication (etching) techniques have both high spatial reproducibility and resolution. As the sensor was also designed to produce a spatially periodic magnetic field in the material under test (MUT), the sensor response can be accurately modeled which dramatically reduces calibration requirements. For example, in some situations an "air calibration" can be used to measure an absolute electrical conductivity without calibration standards,

which makes the MWM sensor geometry well-suited to surface mounted or embedded applications where calibration requirements will be necessarily relaxed.

An efficient method for converting the response of the MWM sensor into material or geometric properties is to use grid measurement methods. These methods map the magnitude and phase of the sensor impedance into the properties to be determined and provide for a real-time measurement capability. The measurement grids are two-dimensional databases that can be visualized as "grids" that relate two measured parameters to two unknowns, such as the conductivity and lift-off (where lift-off is defined as the proximity of the MUT to the plane of the MWM windings). For the characterization of coatings or surface layer properties, three-dimensional versions of the measurement grids can be used. Alternatively, the surface layer parameters can be determined from numerical algorithms that minimize the least-squares error between the measurements and the predicted responses from the sensor.

An advantage of the measurement grid method is that it allows for real-time measurements of the absolute electrical properties of the material. The database of the sensor responses can be generated prior to the data acquisition on the part itself, so that only table lookup operation, which is relatively fast, needs to be performed. Furthermore, grids can be generated for the individual elements in an array so that each individual element can be lift-off compensated to provide absolute property measurements, such as the electrical conductivity. This again reduces the need for extensive calibration standards. In contrast, conventional eddy-current methods that use empirical correlation tables that relate the amplitude and phase of a lift-off compensated signal to parameters or properties of interest, such as crack size or hardness, require extensive calibrations and instrument preparation.

FIG 2 and FIG 3 illustrate the capability of the MWM sensor to provide a measure of fatigue damage prior to the formation of cracks detectable by traditional nondestructive inspection methods. Hourglass and "dog-bone" shaped specimens were exposed to varying fractions of their fatigue life at a known alternating stress level. The MWM conductivity measured with conductivity/lift-off grids for stainless steel and aluminum alloys correlates with fatigue life fraction, as shown in FIG 2, and reflects cumulative fatigue damage. For Al 2024, the MWM

measurements detect fatigue damage at less than 50 percent of the specimen's fatigue life. For Type 304 stainless steel specimens, the decrease in effective conductivity starts much earlier (which can be attributed to a change in magnetic permeability due to a gradual formation of martensite of deformation) and continues to decrease, almost linearly, with increasing fatigue life fraction, as defined by the cycle ratio N/N_F , i.e., (cumulative cycles)/(cycles to failure). The nonlinearity of the damage with cumulative fatigue life for Al 2024 in a typical bending fatigue coupon is well depicted by MWM measurements illustrated in both FIG 2 and FIG 3.

FIG 3 shows the ability of an MWM sensor to detect the spatial distribution of fatigue damage as the sensor was scanned along the length of coupons exposed to fully reversed bending. These measurements reveal a pattern of fatigue damage focused near the dogbone specimen transition region for both the 70 and the 90 percent cumulative life specimens. The minimum conductivity at the 3 cm point on the specimen that reached 90 percent of its fatigue life corresponds precisely with the location of a visible crack. These measurements were taken with a sensor having a footprint of 1 inch by 1 inch. The presence of a damaged region in the vicinity of the crack is indicated by the depressed conductivity near the crack, even when the crack is not under the footprint of the sensor. Thus, bending fatigue produces an area damaged by microcracks prior to the formation of a dominant macrocrack, and that damaged area is detectable as a significant reduction in the MWM measured conductivity. Photomicrographs have shown that clusters of microcracks, 0.001 to 0.003 inches deep, begin to form at this stage. Although detectable with the MWM, these microcrack clusters, termed wide-spread fatigue damage (WFD), were not detectable with liquid penetrant testing, except at the very edge of the 90 percent life specimen. This same behavior has been observed for MWM measurements on military and commercial aircraft structural members.

FIGS 4a and 4b provide two-dimensional images of the measured conductivity over the 90 percent life fatigue specimen with the MWM in two different orientations. In this case, the MWM footprint was 0.5 inches by 0.5 inches. When the extended portions of the MWM winding segments are oriented perpendicular to the cracks, the MWM has maximum sensitivity to the macrocrack and microcrack clusters (FIG 4a). When the extended portions of the MWM are

oriented parallel to the crack, the MWM has minimum sensitivity to the macrocrack and microcrack clusters (FIG 4b). The directional dependence of the sensor response in the fatigue damaged area adjacent to the macrocrack indicates that the microcracks that form at early stages of fatigue damage are highly directional and, in this case, are aligned with the bending moment axis. Similar measurements on complex aircraft structural members have shown similar behavior at early stages of fatigue damage, before detectable macrocracks have formed. Note that the microcrack density and size increases are indicated by a larger reduction in the MWM absolute conductivity measurements. Thus, as expected, the microcrack size and density increase near the coupon edges and are lower at the center.

Similar two-dimensional images of the measured conductivity have been obtained on actual military components. FIGS 5a and 5b show the surface scan mapping of fatigue damage on a military aircraft bulkhead for MWM windings segments oriented both perpendicular and parallel to the bending moment axis. One portion of the bulkhead was found to contain a localized conductivity excursion characteristic of early stage fatigue microcracking. A conventional eddy-current inspection of this area found only discrete macrocracks. However, the width of the area of the MWM measured reduced conductivity beyond the macrocrack area indicates that there is a region of microcracking in addition to the discrete macrocracks.

Fatigue damage can also create variations in the magnetic permeability, as indicated in

FIG 6 for two austenitic stainless steel specimens. One specimen was fatigue tested while the other was not. Surface scans with the MWM windings oriented perpendicular and parallel to the length of the specimens show a bi-directional magnetic permeability in the fatigued specimen. The magnetic susceptibility is largest in the loading direction as the fatigue alters the microstructure of the stainless steel, creating a magnetic phase such as martensite from the initially nonmagnetic material.

FIGS 7a and 7b show the results of examinations of service exposed sections of a Boeing 737 fuselage. MWM measurements were made on the lap joint near the passenger windows and on the skin panels under the pilot window post. The MWM

-19-

detected several areas with substantial conductivity variations that could be identified as areas of wide-spread fatigue damage, i.e., extensive fatigue microcracking. FIG 7a shows a horizontal scan several inches above the top fastener row of the lap joint. The MWM measured conductivity has minima that correspond consistently with the vertical edge locations of the windows. Thus, substantial bending fatigue damage was detected by the MWM several inches above the lap joint fastener rows. The bending fatigue coupon data suggest that this region is beyond 60 percent of its fatigue life, although it probably does not contain macrocracks which would be detectable with conventional differential eddy-current methods or with liquid penetrant testing. FIG 7b shows a vertical scan down the panel. The damage begins near the bottom of the windows and increases steadily, with the maximum damage occurring at the fasteners. A key observation from these measurements is that this damage is detectable more than six inches away from the fasteners. It was later verified that cracks near fasteners were correlated with regions of reduced conductivity found by the MWM several inches away from any fasteners. Five out of five locations in which macrocracks had been documented at fasteners had been in areas similar to those identified by the MWM detection of distributed damage away from the fasteners.

This ability to map the spatial extent of the wide area fatigue provides information that can be used to improve the selection of patch location and size, thereby potentially improving the reliability of the repairs and reducing follow-on maintenance costs. The MWM measured conductivity information may also be used to identify specific regions that require fastener inspections, as well as to support inspection, maintenance scheduling and redesign efforts. This is important because the locations of these areas are not always intuitive, since the structural response is affected by design features such as window edge stiffeners, lap joints, and doublers, and by maintenance features such as patches and repairs in sometimes unforeseen ways.

FIGS 8a and 8b show expanded versions of an eight-element array. Connections are made to each of the individual secondary elements 248. For use with air calibration, dummy elements 250 are placed on the outside meanders of the primary 254. As described in Patent Application 09/182,693, the secondaries are set

back from the primary winding connectors 252 and the gap between the leads to the secondary elements are minimized. This flexible array can be inserted into a hole within the gage section of a fatigue specimen to monitor crack initiation and initial crack propagation or placed flush against a surface to monitor crack propagation.

5 FIG 9 shows an example application of six MWM-Arrays from FIGS 8a and 8b with two mounted inside a hole and four mounted on the adjacent flat side surfaces of a fatigue test coupon. The MWM-Arrays mounted within the hole can be used to detect shallow part-through wall cracks (e.g., tunneling cracks that have initiated inside the hole but have not propagated to the outside surface). The
10 MWM-Arrays can also be placed around the circumference of a cylindrical or hyperbolical gage section. Multi-frequency MWM measurements can provide diagnostic information to monitor crack propagation in both length and depth directions. The MWM-Arrays on the sides are used once a "corner" or through-wall crack (i.e., one that has reached either or both outer surfaces) forms. The crack
15 length can be inferred from the MWM measured effective conductivity since the MWM measured conductivity change correlates with crack length, as shown for example in FIG 17, even for relatively short surface cracks and for cracks deeper than the MWM penetration depth. The correlation with length is expected to be even more robust for through-wall cracks so that a single sensing element MWM
20 may be used for regions outside the hole as well. This type of application is suitable for monitoring crack propagation with fatigue cycles (da/dN) during complex component testing. For example, monitoring of wide areas (e.g. between skins) in an aircraft component may not be possible optically or with potential drop methods. This MWM capability can provide a new tool to demonstrate damage tolerance of
25 structures and establish less burdensome inspection and retirement for time policies.

Surface mounted MWM-Arrays have also demonstrated an on-line capability to monitor cumulative fatigue damage during load cycling. FIG 10 shows the placement of an MWM-Array, from FIGS 8a and 8b, into a 0.25-inch diameter hole
34 located at the center of a 1-inch wide by 0.25-inch thick (25.4 mm wide by
30 6.35-mm thick) specimen 30 made of an aluminum (Al 2024-T351) alloy. The flat specimens with tangentially blended fillets 31 between the test section and the grip ends were tested under constant cyclic stress amplitude in tension loading. The

central hole represents an elastic stress concentration factor of 2.4. The MWM-Array had eight sensing elements (1 mm by 2.5 mm in area) located at 1-mm increments along the array length in the periodic direction. Six of the eight elements were mounted in contact with the internal cylindrical surface of the hole while the two outermost elements were intentionally outside the hole. The fixture 36 holds the MWM-Array inside the hole and the probe electronics 32 for amplifying and multiplexing the measured signals to allow continuous monitoring throughout the test. Several specimens were run to failure to determine the response throughout the fatigue life, i.e., from crack initiation to failure, while fatigue tests of other specimens were stopped at various stages of crack initiation and propagation, as illustrated for example in FIGS 11 through 15.

FIGS 11a, 11b, 12a, and 12b show the MWM measurements during a fatigue test. The third element channel failed in this first test so the data for the third element is not provided. FIGS 11a and 11b show the absolute electrical conductivity measurements for each element of the MWM-Array. FIG 11a shows the conductivity as a function of the number of fatigue cycles for each element while FIG 11b shows the conductivity as a function of the element position across the thickness of the drilled hole for several fatigue levels. The pronounced decrease in conductivity at around 25,000 cycles indicates crack initiation. The crack appears to initiate near Element 2, as this was the first element to exhibit a decrease in the conductivity. The crack then quickly propagates to the edge at Element 1 and then gradually propagates to the other edge and is detected by Element 6. This particular test was stopped when Element 6 began to detect the crack. Upon an examination with an optical microscope at magnification of 100 times, no crack was apparent on the outer surface near Element 6.

FIGS 12a and 12b show the lift-off measurements for each element of the MWM-Array using a uniform property model. FIG 12a shows the lift-off as a function of the number of fatigue cycles for each element while FIG 12b shows the lift-off as a function of the element position across the length of the cylindrical hole for several fatigue levels. The initial decrease and leveling of the lift-off data during the initial testing (less than 15,000 cycles) illustrates the "settling" of the MWM as the sensor adjusts to the surface. The increase of the effective lift-off during later

stage testing shows the effect of the opening of the crack. Although this lift-off data shows that the uniform property model can represent the crack, improved models of crack interactions with spatially periodic field sensors should enhance crack detection sensitivity and also provide depth measurements. Also, monitoring of

5 "effective lift-off" signals using the MWM-Array for deep cracks (over 0.1 inches) provides information about the "compliance" of large cracks and may be useful for crack depth estimates.

The ability to continuously monitor fatigue specimens while being loaded provides a capability to create samples with very early stage fatigue damage. FIGS

10 13a and 13b show the response of an MWM-Array inside a Al 2024 fatigue test specimen and provide an image of the crack initiation and growth as a function of fatigue cycles and position. In this case the specimen was removed from the test after the decrease in MWM measured conductivity indicated the formation of a sizable crack at one location within the hole (Element 2) and the possibility of

15 microcracking at multiple locations along the axis of the hole (Elements 1 and 3). Metallography performed on this specimen after scanning electron microscopy (SEM) identified a crack near Element 2 about 0.034 inches deep and substantially smaller cracks further away from Element 2. The SEM examination of the area monitored with the MWM-Array revealed multi-site damage with predominantly

20 axial cracks ranging from 0.004 inches to over 1/16 inch in length. Adjacent to the sizable crack detected by the MWM, the SEM examination revealed a series of intrusions parallel to the crack and normal to the machining marks from reaming. These intrusions might be associated with persistent slip bands (PSB). The uniform reduction in absolute conductivity across the six sensing elements as the fatigue

25 coupon warms up (with increasing load cycles) is distinguishable from the local reductions in conductivity by individual elements and allows for compensation of the temperature variations during the measurement. Thermocouples, thermistors or other temperature monitoring methods can be used for this temperature correction.

FIGS 14a, 14b, 14c, 15a, 15b, and 15c show the normalized electrical

30 conductivities for several more fatigue test specimens. Specimen #5 was a 7075 aluminum alloy while specimens #32 and #34 were Al 2024 alloys. In order to help determine the threshold for detection of fatigue damage, these tests were stopped at

different levels of conductivity reductions. In the case of Specimen #32, the fatigue test was stopped when the MWM conductivity drop (relative to the "background" level at neighboring channels) at Channels #2 and 3 were considered indicative of either microcrack formation or advanced stages of fatigue damage accumulation prior to formation of microcracks. These samples were examined thoroughly with an SEM by scanning the surface of the hole at magnifications up to 1,000X across the entire area monitored during the fatigue tests with MWM-Arrays. A number of areas were examined at higher magnifications, up to 10,000X. The SEM examinations are extremely time consuming, since one must cover substantial surface area looking for cracks on the order of 0.002 inches and smaller. Since the cracks for each of these specimens did not reach the outside surface of the component, it appears that the monitoring capability with the MWM-Array allows tests to be stopped with various crack sizes within the hole and particularly at various early stages of "pre-crack" accumulated fatigue damage, during the "short crack" growth stage as well as during "long crack" growth stage.

SEM examinations confirmed the presence and locations of cracks in the specimens. SEM examinations of Specimen #34 revealed a few microcracks, ranging from 0.0004 to 0.0036 inches (10 to 90 (m) on the surface of the hole monitored by MWM. The 0.0036 inch long intermittent crack was in the area monitored by Elements 3 and 4 of the MWM. A crack in this location is consistent with the MWM response of FIGS 14b and 15b. An examination of Specimen #34 by an NDE Level 3 inspector, using a very sensitive conventional eddy-current probe, did not reveal any crack-like indications in the area monitored by the MWM-Array during the fatigue test. However, the eddy-current examination detected small crack-like indications on the opposite side of the hole that was not monitored by the MWM-Array. This finding provides an additional confirmation that microcracks not detectable by a traditional eddy-current method but detectable and detected by MWM sensor should have existed on the side monitored by the MWM-Array. After carefully cross-sectioning the specimen to the position of the 0.0036 inch crack, examinations of the crack area with an optical microscope at several magnification levels verified the presence of the crack. Metallography revealed that the crack depth was approximately 0.001 inches (25 (m). Similar SEM

examinations performed on Specimen #5 indicated two cracks, which is consistent with the MWM data of FIG 15a. SEM examinations of Specimen #32 revealed a few cracks ranging in length from 0.0005 to 0.006 inches (12 to 150 (μ m)), with two distinct cracks that were less than 0.002 inches long. The longest detected crack was
5 intermittent, i.e., consisted of a few adjacent continuous cracks. Assuming a semicircular geometry for the cracks, the estimated depth of individual continuous cracks ranging in length from 0.0005 to 0.0024 inches (12 to 60 (μ m)) would be between 0.00025 and 0.00125 inches (6 and 30 (μ m)).

FIG 17 summarizes the results on the tested specimens in terms of crack
10 length compared to the MWM measured data. The data for specimens #32 and #34 are difficult to analyze because there are multiple crack indications and the longer cracks (e.g., the 0.006 inch long crack in specimen #32) appear to be intermittent (i.e., formed from several shorter cracks). Furthermore, the depth of penetration of the MWM magnetic fields at 1 MHz is on the order of 0.003 inches so that cracks
15 shallower than 0.003 inches will produce a MWM conductivity dependence based on depth as well as length. For these cracks, a higher frequency measurement (e.g. 6 or 10 MHz) is expected to provide a more reliable measure of crack length as well as a better signal to noise for improved sensitivity to microcrack detection. Multiple frequency measurements should then allow for estimating crack propagation in both
20 length and depth directions.

The reliable detection of the onset of fatigue damage and the number of cycles to crack initiation, N_i , can be performed automatically using trend detection algorithms. An example detection algorithm is to use a simple hypothesis test to build a first set of statistics (e.g., standard deviations) for the no damage MWM
25 conductivity data at the beginning of the test and also a second set of statistics for a moving window of most recent data. This grouping of data is illustrated in FIG 16 for an example conductivity variation with number of fatigue cycles. The data must first be corrected for thermal drift, either by using thermocouples or by filtering the (nearly linear) temperature trend from the damage related conductivity changes vs.
30 number of fatigue cycles data. A simple hypothesis test might require that the MWM conductivity change be at least twice the sum of the standard deviations of the No Damage MWM Data and the Most Recent MWM Data. An automated test

would determine the confidence level of the statement that "the most recent data shows a conductivity drop not related to metal temperature changes, compared to the earlier no damage data." The confidence level will depend on the statistical separation of the two sets of data. Similar techniques are commonly used to detect downward trends in noisy data, such as the stock market. An automated test is an improvement over the human interpretation of visual data as human operators typically have an expectation of results, based on prior knowledge of the coupon material or expected number of cycles to initiation, that can influence the results.

Another aspect of the invention described here relates to unique geometries for fatigue specimens that intentionally shape the stress distribution so that the damage initiation sites will lie within the area under inspection by a surface mounted eddy-current sensor.

With a traditional dogbone design, fatigue damage starts in the middle of the specimen but is not localized along the length of the samples. Thus, there is no guarantee that the fatigue damage will initiate beneath the surface mounted sensor. The new specimen geometries described here, and illustrated in FIGS 18, 19, and 20, localize fatigue damage both lengthwise to ensure it occurs in the reduced center section of the specimen 30 and in the middle of the reduced thickness center section in order to avoid cracks at the edges of the gage section. The lengthwise localization is accomplished by thinning across the center portion of the specimen 301.

Reduction of the formation of cracks at the edges is accomplished with reinforcement ribs along the edges 302 and/or with symmetrical radius cutouts 303 on both sides of the specimen, above and below the gage section. FIG 18 shows a dogbone specimen 300 with thinning at the center section of the specimen 301 and reinforcement ribs 302. The thinning at the center section can also be accomplished with cutout sections on each side in order to avoid bending moments. FIG 19 shows a dogbone specimen 300 with thinning at the center of the specimen 301 with radius cutouts 303 on both sides of the thinned section. FIG 20 shows a dogbone specimen 300 with thinning at the center section 301 and both reinforcement ribs 302 and radius cutouts 303. Each of these designs significantly reduces the stresses at the edges and thereby prevents initiation of fatigue damage at the edges in the early stages of fatigue.

FIGS 21 through 41 illustrate new embodiments for the MWM-Array sensor structure and applications of these structures. These embodiments provide greater sensitivity to the flaws being investigated and can be applied to both surface mounting on and scanning across test materials.

5 FIGS 21a and 21b show a sample configuration for the detection of cracks near fasteners with MWM sensors mounted on the surface. A steel fastener 42 is attached to the fatigue test coupon 40 of Al 2024 at a semicircular notch. The mounting bracket 44 holds the MWM sensor against the surface of the test coupon throughout the duration of the tension-tension fatigue test. The electronics package
10 46 provides signal amplification of the sensing elements in the MWM sensor, as necessary. MWM sensors can be permanently mounted at fasteners in difficult-to-access locations and elsewhere.

FIG 22 illustrates the positioning of an MWM sensor 16 near the hole 63 used for a steel fastener 67. A crack 61 formed beneath the fastener as a result of the
15 tension fatigue load cycling on the test coupon of FIGS 21a and 21b. The crack 61 originally initiated at the notch of the hole beneath the head of the fastener and was detected when it extended approximately 0.070 inches (1.75 mm) beyond the edge of the fastener head 65. However, this crack propagated only 0.020 inches under the footprint of the sensor array defined by the region covered by the active sensing
20 element, as illustrated in FIG 22. The signal measured by the MWM, and hence the effective conductivity and lift-off measured by the sensor, will change as the crack propagates across the sensing elements 18. Orienting the sensor so that the extended portions of the windings are perpendicular to the crack provides maximum sensitivity to the presence of the crack, as illustrated in FIG 4a. The earliest
25 detection of the crack occurs as the crack tip approaches the position of the end-most sensing element. This suggests that it is desirable to locate the first sensing element (as opposed to a dummy element, denoted by 14 in FIG 1) as close as possible to the edge of the primary winding meanders. Although eliminating the dummy element on the edge will influence the ability to perform an air calibration measurement, it
30 can provide an earlier indication of the presence of a crack beneath the fastener. Furthermore, although this MWM sensor does not locate the position of the crack along a meander, the length of the crack can be estimated from the reduction in the

effective conductivity as the crack propagates across each individual secondary element.

FIG 23 illustrates an alternative embodiment for an MWM-Array. This linear sensing MWM-Array has a primary winding 52 for creating a spatially periodic magnetic field for interrogating the MUT and a plurality of secondary elements 54 along the length of each meander. The primary winding 52 is split into two parts, with lead connections 66 and 68 on either side of the sensor. This configuration for the primary winding uses two conducting loops to impose a spatially periodic magnetic field, similar to the single loop meandering winding 10 of FIG 1. This configuration minimizes the effects of stray magnetic fields from the lead connections to the primary winding, which can create an extraneous large inductive loop that influences the measurements, maintains the meandering winding pattern for the primary, and effectively doubles the current through the extended portions of the meanders, as will be discussed with reference to FIGS 35, 37, and 40. Secondary elements that couple to the same direction of the magnetic field generated by the primary winding, such as elements 54 and 56, are connected with connections 70, perpendicular to the primary winding meander direction, so that the sum of the secondary element responses appears at the winding leads 64.

To provide complete coverage when the sensor is scanned across a part or when a crack propagates across the sensor, perpendicular to the extended portions of the primary winding, secondary elements 58 in adjacent meanders of the primary are offset along the length of the meander. The dummy elements 60 are used to maintain the periodic symmetry of the magnetic field and the extension elements 62 are used to minimize differences in the coupling of the magnetic field to the various sensing elements, as described in Patent Application 09/182,693. Additional primary winding meander loops, which only contain dummy elements, can also be placed at the edges of the sensor to help maintain the periodicity of the magnetic field for the sensing elements nearest the sensor edges. The secondary elements are set back from the cross-connection portions 53 of the primary winding meanders to minimize end effects on the measurements.

The connection leads 64 to the secondary elements are perpendicular to the primary winding meanders, which creates a "T" shape and necessitates the use of a

multi-layer structure in fabricating the sensor. The sensor of FIG 23 has the layer containing the primary winding 52 separated from a layer containing the secondary windings by a layer of insulation. Generally, layers of insulation are also applied to the top and bottom surfaces of the sensor to electrically insulate the primary and secondary windings from the MUT. All of the leads to the secondary elements can also be reached from one side of the sensor. In contrast, the basic sensor geometry of FIG 1 has a single layer structure and connections to secondary elements, when placed on opposite sides of the primary winding meanders, require access to both sides of the sensor.

10 An advantage of the sensor of FIGS 23a and 23b over the sensor geometry of FIG 1 is that it can detect cracks and determine the crack location within the footprint of the sensor. When a crack propagates perpendicular to the primary winding meander direction, only the secondary elements directly over the crack will sense a significant change in signal or reduction in effective conductivity. As the crack continues to propagate, the signal from additional secondary elements will be affected. In principle, the crack length can be determined from the reduction in effective conductivity. In contrast, the secondary elements 12 of FIG 1 span the length of the primary winding and cannot distinguish the crack position along the length of the meander.

20 FIGS 24a and 24b show a circularly symmetric embodiment of an MWM-Array. This MWM-Rosette or periodic field eddy-current – rosette (PFEC-Rosette) maintains the spatial periodicity of the magnetic field in the radial direction with primary winding 82. The characteristic dimension for this radial spatial periodicity is the spatial wavelength. The plurality of secondary elements 84, 86, and 88 provide complete coverage around the circumference of the sensor and can be used to detect cracks and determine the crack location. The gap 89 between the primary winding conductors 85 and 87 is minimized to reduce any stray magnetic fields from affecting the measurements. FIGS 27a and 27b show a circularly symmetric variation of a standard MWM-Array. As with FIGS 24a and 24b, the primary winding 90 maintains the spatial periodicity of the magnetic field in the radial direction. The secondary elements 92, 94, 96, and 98 provide complete coverage around the circumference of the sensor and can be used to detect cracks

and determine the crack length. The first active sensing (secondary) element is located as close as possible to the inside of the sensor to enable early detection of cracks. The primary winding 90 is fabricated onto one side of a substrate 91 while the secondary elements 92, 94, 96, and 98 are fabricated onto the opposite side of the substrate. Individual connections 93 are made to each of the secondary elements for independent measurements of the response of each element. Alternatively, the net signal from all of the elements can be obtained by connecting the loops together.

The rosette configuration is most useful for crack detection and location around circularly symmetric regions, such as around fasteners. The rosette configuration can also be used in areas where the stress distribution and the crack initiation point and growth direction may not be known because of complex component geometry or service related repairs.

The MWM-Array configurations of FIGS 23a, 24a, and 27a can be surface mounted on a part, as has been demonstrated for the standard MWM and MWM-Array of FIGS 1, 8a, and 8b. This mounting can take the form of a clamp or pressure fitting against the surface, or the sensors can be mounted with an adhesive and covered with a sealant. Since the MWM sensors do not require an intimate mechanical bond, compliant adhesives can be used to improve durability.

The MWM sensors embodied in FIGS 1, 8a, 23a, 24a, 27a, 38a, 39a, 46 and 47 can also be packaged on a roll of adhesive tape. Individual lengths of the tape may be cut to meet the length requirements of particular application. For example, a single strip of tape containing numerous MWM-Rosettes may be placed along a row of fasteners relatively rapidly. Electrical connections can be made to bond pads for the individual sensors or groups of sensors. When mounted against a surface, the adhesive can be provided along one surface of the supporting membrane to bond the selected length of the sensor array to a part to be tested. When mounted between layers, the adhesive should be provided along both the upper and lower exposed surfaces.

The sensors can also be embedded between layers of a structure, such as between layers of a lap joint or under repairs using composites or metal doublers, possibly with a sealant or other fillers to support compressive loads. This is illustrated in the cross-sectional view of FIG 25 for MWM-Arrays 266 embedded in

the sealant 262 between structural panels 260 and around a fastener 264. It also follows that the rosette configurations can be formed into "smart" washers that can be placed directly beneath the heads of fasteners. This is illustrated in the cross-sectional view of FIG 26 for an MWM-Rosette 272 placed between the head of a fastener 270 and a structural panel 260. The sealant 262 may be placed between the structural panels, between the MWM-Rosette and the fastener head, or over the entire fastener head.

Since processing of the measured responses through the measurement grids provides the capability for each sensing element to be individually lift-off compensated and access to each element is not required for calibration, the sensor can be covered with a top coat of sealant to provide protection from any hazardous environments. Furthermore, the sensor can intentionally be set off a surface, or fabricated with a porous (or liberally perforated) substrate material, to avoid or minimize interference with the environment causing the corrosion process to occur on the surface and to provide continuous monitoring and inspection for stress corrosion cracking or corrosion fatigue.

FIG 28 illustrates an example configuration in which two closely spaced MWM-Rosettes 97 are placed around two fasteners 99. The fasteners are also near a corner fitting 101. This is meant to illustrate that the rosettes can operate when next to one another, and they can be driven either simultaneously or sequentially. The winding patterns for the primaries help cancel the magnetic fields outside the footprint of each sensor so that the cross-coupling of fields between rosettes is minimal. A distributed architecture can be used for the electrical connections to each of the rosettes. The electronics 103 can be distributed so that each rosette has independent amplification and connection cables. Alternatively, multiplexing or parallel processing of each of the individual sensing elements, as appropriate, can reduce the number of independent amplifiers and cables. The electronics can be located near the sensing elements or at the opposite end of the connecting cables, far from the sensing elements, as necessary. In addition, the electronics can also be made flat and flexible for embedding in the structure so that relatively few signal and power line connections are required for each rosette.

These configurations, particularly when applied in a surface mount application, provide new capabilities for fatigue damage monitoring. For example, there is a stated requirement in both military and commercial sectors to more accurately determine the number of cycles to crack initiation, N_i , in fatigue test coupons and component tests. For coupons, this is necessary to determine the fatigue behavior of new alloys and to qualify production runs for materials used in aircraft structures. For fatigue tests of complex structures, determination of both the number of cycles to crack initiation and monitoring of crack propagation and crack propagation rates, da/dN (depth vs. cycles) and dl/dN (length vs. cycles), is required and would provide essential information for both aging aircraft management and newer aircraft design and modification. When cracks initiate in difficult-to-access locations, however, crack propagation rates can not be determined during fatigue testing. Thus, either costly disassembly is required during fatigue tests, or very conservative damage tolerance-based inspection scheduling for in-service aircraft will result. Surface mounting of the sensors substantially reduces the disassembly requirement and allows for more periodic inspections.

FIG 29 shows an alternative embodiment for a sensor 212 having a primary winding 214 and a plurality of sensing elements 216 mounted onto a common substrate 213. The sensing elements 218 of the sensing elements 216 on one side, those in the channels opening to the bottom of FIG 29, are smaller sensing elements. The sensing elements 218 are offset, starting at the top on the left of FIG 29. The offset is perpendicular to the scan direction to support image building of the "crack" response. The staggering of the secondary positions provides for complete coverage when the sensor is scanned over the MUT in a direction perpendicular to the primary meanders. Individual connections to each of the staggered secondary elements 216 also support the construction of images of the measured properties. Elongated extensions 226 to the secondary elements (224) can help to minimize variations in the parasitic coupling between the primary and the secondary elements. Dummy elements 222 can also be added to the endmost primary meanders, as taught in Patent Application 09/182,693. The elements 219 on the opposite side of the meandering primary are shown grouped and can be used to provide a measure of the background properties of the material which can complement the higher resolution

property image obtained from the smaller sensing elements. FIG 46 and FIG 47 show two additional embodiments for linear sensor arrays where a single primary winding creates the imposed magnetic field and individual connections are made to each secondary element in the array.

5 FIG 30 shows a schematic for a multilayer sensor array that provides high imaging resolution and high sensitivity to hidden macrocracks and distributed microcracks. This deep penetration array design is suitable for the detection of hidden fatigue damage at depths more than 0.1 inches. The sensor array contains a single primary winding 104 and an array of secondary or sensing elements designed
10 for absolute 106 or differential 108 measurements as described below with respect to FIGS 31 and 32. In this tapered MWM-Array current flow through the primary winding creates a spatially periodic magnetic field that can be accurately modeled. The voltage induced in the secondary elements by the magnetic field is related to the physical properties and proximity to the MUT. Except for the rightmost sensing
15 elements, two sensing elements are located within each meander of the primary winding. The absolute elements are offset in the x direction from other absolute elements to provide an overlap and complete coverage of the MUT when the array is scanned in the y direction. Similarly the differential elements are offset from one
20 another to also provide complete coverage.

20 This sensor also uses a single primary winding that extends beyond the sensing elements in the x and y directions. This has the specific advantages of eliminating the problem of cross-coupling between individually driven sensing elements and reducing parasitic effects at the edges of the sensor. These parasitic effects are further reduced by the introduction of passive, dummy elements that
25 maintain the periodicity of the sensor geometry. These elements are illustrated in FIG 30 in the end meanders 110 and within the meanders containing the sensing elements 112.

 Furthermore, the distance between the sensing elements and the primary (drive) winding is large enough to minimize coupling of short spatial wavelength
30 magnetic field modes. As a result, the sensing element response is primarily sensitive to the dominant periodic mode. This produces improved depth of sensitivity to the properties of an MUT.

-33-

The design of the sensor in FIG 30 also minimizes differences in coupling of the magnetic field to the sensing elements. The taper of the primary winding in the y direction maintains the distance between the sensing elements and the edge segments of the primary winding 114 and 116. This also effectively balances the fringing field coupling to the electrical leads 118 for connecting to the sensing elements. These leads are kept close together to minimize fringing field coupling. The leads for the primary winding 120 are kept close together to minimize the creation of fringing fields. The bond pads 122 and 124 provide the capability for connecting the sensor to a mounting fixture. The trace widths for the primary winding can also be increased to minimize ohmic heating, particularly for large penetration depths that require low frequency and high current amplitude excitations.

In order to maintain the symmetry for the sensing elements, multiple layers are required for the winding patterns. In FIG 30 the primary winding is fabricated on one side of an electrical insulator 102 while the secondaries are deposited onto the opposite side of the insulator. The three-layer structure is then sandwiched between two additional layers of insulation, with adhesives bonding the layers together. This deposition can be performed using standard microfabrication techniques. The insulation used for the layers may depend upon the application. For conformable sensors, the insulating layers can be a flexible material such as KaptonTM, a polyimide available from E. I. DuPont de Nemours Company, while for high temperature applications the insulating layers can be a ceramic such as alumina.

Although the use of multilayer sensors and sensor arrays is widespread in the literature, one unique approach here is the offset combination of absolute and differential elements within a meandering winding structure that provides a spatially periodic imposed magnetic field and has been designed to minimize unmodeled parasitic effects. Specific advantages of this design are that (1) it allows complete coverage with both types of sensing elements when the array is scanned over an MUT, (2) the response of the individual elements can be accurately modeled, allowing quantitative measurements of the MUT properties and proximity, and (3) it provides increased depth of sensitivity. In particular, while U.S. Patent 5,793,206 teaches of the use of numerous sensing elements within each meander of a primary

winding, the design of FIG 30 illustrates how the layout of the primary and secondary windings can provide improved measurement sensitivity.

FIG 31 shows an expanded view of one of the absolute sensing elements 106. Electrical connections to the sensing loop are made through the leads 130 and the bond pads 122. The dummy elements 132 maintain the periodicity of the winding structures and reduce element to element variability. The distance between the primary winding segments 134 and the secondary winding segments 136 can be adjusted to improve measurement sensitivity, as described in Patent Application 09/182,693. It is particularly advantageous to have this distance as large as possible when attempting to detect deep defects, far from the surface. With each absolute sensing element independent of the response of the other elements, the measured signal can be processed with measurement grids, as described in US Patent 5,543,689, to independently measure the local material property and proximity to the MUT. The measured properties from each absolute sensing element can then be combined together to provide a two-dimensional mapping of the material properties.

FIG 32 shows an expanded view of two differential sensing elements 140 placed adjacent to one another, between two primary windings 142. Each differential element includes two sensing coils 144 with associated connection leads 146. The meandering pattern of the leads provides essentially the same coupling areas and fields across the sensing region between the sensing coils. Dummy elements 148 are placed on the sides and between the pairs of differential coils closest to the center of the sensor in the x direction to further minimize any differences between the coils. By maintaining the symmetry between the coils and the sensing leads, the coil differences can be taken at the bond pads 124 or with electronics external to the sensor itself. Similar to the absolute coils, the gap spacing between the primary windings and the secondary coil can be adjusted and optimized for a particular measurement application. When scanned in the y direction, the offset of these elements in the x direction provides the capability for creating a two-dimensional mapping of the differential response, which indicates local variations in the material properties and proximity.

FIG 33 shows an alternative orientation for the differential sensing elements 140 between the primary windings 142. In this case, the individual windings 144 of

the sensing elements are placed symmetrically on opposite sides of the centerline between the primary windings and perpendicular to the extended portions of the primary windings. In this orientation the differential response is parallel to the scan direction for the sensing array.

5 This combination of both differential and absolute sensing elements within the same footprint of a meandering primary winding is novel and provides new imaging capabilities. The differential elements are sensitive to slight variations in the material properties or proximity while the absolute elements provide the base properties and are less sensitive to small property variations. In one embodiment,
10 the raw differential sensor measurements can be combined with one, some or all of the raw absolute measurements to provide another method for creating a two-dimensional mapping of the absolute material properties (including layer thicknesses, dimensions of an object being imaged, and/or other properties) and proximity. In another embodiment, the property and proximity information obtained
15 from the absolute measurements can be used as inputs for models that relate the differential response to absolute property variations.

FIG 34 shows an expanded view of an alternative method for connecting to an absolute sensing element 304. Electrical connections to the sensing loop are made through the leads 310, which are offset from the centerline 314 between
20 adjacent conductors for the primary winding 302. A second set of leads 316 are offset the same distance from the centerline on the other side of the centerline and connected together to form a flux linking loop with conductor 318. The connection leads 310 to the sensing element are then connected to the second set of leads 316 in a differential format to so that the flux linked by the second set of leads essentially
25 subtracts from the flux linked by the leads to the sensing element. This is particularly useful when the sensing elements are made relatively small to provide a high spatial resolution and the flux (or area) linked by the loop created by the connection leads becomes comparable to the flux (or area) of the sensing element. The distance 312 between the cross-connection 318 on the second set of leads and
30 the sensing element should be minimized to ensure that the flux linked by the connection leads is nearly completely canceled. Dummy elements can also be used, as illustrated in FIG 31, to help maintain the periodicity of the conductors.

One of the issues with planar eddy-current sensors is the placement of the current return for the primary winding. Often the ends of the primary winding are spatially distant from one another, which creates an extraneous and large inductive loop that can influence the measurements. One embodiment for a layout for a primary winding that reduces the effect of this inductive loop is shown in FIG 35. The primary winding is segmented with the width of each segment 150 determining the spatial wavelength λ . The segments of the primary winding are connected to bond pads 154 through leads 152, where the leads are brought close together to minimize the creation of stray magnetic fields. After wrapping the leads and bond pads behind the face of the primary winding, the individual segments are then connected together in series. The arrows then indicate the instantaneous current direction. The space behind the sensor array can be filled with rigid insulators, foam, ferrites, or some combination of the above. This three-dimensional layout for the sensor effectively creates a meandering winding pattern for the primary with effectively twice the current in the extended portions of each segment and moves the large inductive loop for the primary winding connections far from the sensing region. The sensing elements 156 and dummy elements 158 are then placed in another layer over the primary winding. This design can also be applied to the tapered MWM array format of FIG 30, where the primary windings become trapezoidal loops.

Grid measurement methods can also be applied to multi-layer sensor constructs. For example, FIG 36 shows a measurement grid for the two layer MWM sensor of FIGS 38a and 38b. This measurement grid provides a database of the sensor response (the transimpedance between the secondary winding voltage and the primary winding current) to variations in two parameters to be determined. In FIG 36, these parameters are the lift-off and the test material conductivity. The sensor response values are typically created with a model which iterates each parameter value over the range of interest to calculate the sensor response, but in circumstances where extensive reference parts are available which span the property variations of interest, empirical responses can be used to create the grids. After measuring the sensor response on a test material, the parameter values are determined by interpolating between the lines on the measurement grid.

An alternative method of making connections to the various components of the primary winding elements is shown in FIG 37. In this case, the cross-connections 180 between the various segments of the primary winding reduces the number of bond pad connections 154 for the primary windings. This greatly
5 simplifies the electrical connections to the sensor as only four bond pads are required, independent of the number of meanders in the footprint of the sensor. The same concept can be applied for the secondary elements, as the connections 182 indicate. This is useful whenever a combination of secondary elements is desired or independent connections to each of the secondary elements is not required. FIGS
10 38a and 38b illustrate another example of the "split" primary winding design. Dummy elements 132 near the ends of the sensing elements are also included in this case. Furthermore, the dummy elements 158 are extended along almost the entire length of the primary winding loops in order to maintain the design symmetry.

An embodiment of an MWM-Array with multiple sensing elements is shown
15 in FIG 39. The primary winding meanders 230 have connections similar to the primary shown in FIGS 38a and 38b. Secondary element connections 232 are made to groups of secondary elements 236 that span different regions of the primary winding structure so that scanning of the array over an MUT in a direction parallel to the meanders of the primary provide measurements of spatially distinct areas.
20 Dummy elements 234 and 238 help minimize parasitic coupling between the primary and secondary elements to improve air calibrations.

Another embodiment for a layout of the planar primary winding reduces the effect of the primary winding inductive loop as illustrated in FIG 40. The sensing windings 172 with dummy elements 170 are sandwiched between a meandering
25 winding 162 in the first layer and a second meandering winding 168 in the third layer, with electrical insulation between each layer. Vias 164 between the first and third layers provide an electrical connection between the meanders. The connections to the primary are made at the bond pads such as 160. When stacked together, the current in the primary winding is effectively twice the current of a single layer
30 primary winding.

It is also possible to calibrate and verify the integrity of the surface mounted MWM-Arrays by utilizing the accurately modeled and reproducible array geometry

and measurement grids so that extensive sets of reference parts are not required. An initial "air" calibration is performed prior to mounting on the surface. This involves taking a measurement in air, for each array element, and then storing the calibration information (e.g., in a computer) for later reference after mounting the sensors.

- 5 After the sensor has been mounted to a surface, the instrument and probe electronics can be calibrated by connecting to a duplicate sensor so that an air calibration can be performed. After connecting the surface mounted sensor to the instrumentation, the sensor operation and calibration can be verified by measuring the lift-off at each element. The sensor is not operating properly if the lift-off readings are too high,
10 which may result from the sensor being detached from the surface, or if the measurement points no longer fall on a measurement grid, which generally corresponds to a lack of continuity for one of the windings. A final verification involves comparing baseline measurements to other measurement locations that are not expected to have fatigue damage or cracks. This reference comparison can
15 verify sensor operation and may assist in compensating for noise variables such as temperature drift. This may involve using elements of the array that are distant from the areas of high stress concentration.

- The electrical conductivity of many test materials is also temperature dependent. This temperature dependence is usually a noise factor that requires a
20 correction to the data. For example, FIG 41 shows a representative set of conductivity measurements from the elements of the MWM-Array of FIG 8 inserted inside a hole in a fatigue test coupon as the coupon temperature is varied and monitored with a thermocouple. The MWM was designed to be insensitive to variations in its own temperature, as described in U.S. Patent Nos. 5,453,689 and
25 5,793,206 and U.S. Patent Application No. 09/182,693. The temperature of the component can be changed in a variety of ways: with the ambient conditions in the room, with the mechanical loading as the component is fatigued, by grasping it with a hand, and by blowing a hot or cold air jet across it. FIG 41 shows that the conductivity has an essentially linear temperature dependence, over this range of
30 temperatures, so that conductivity measured by each element can be corrected for temperature drift.

Thermally induced changes in the electrical conductivity also provide a mechanism for testing the integrity of the sensor. Heating the test material locally, in the vicinity of the MWM-Array should only lead to a change in conductivity, not lift-off, when the array is compressed against the part. Monitoring the conductivity
5 changes with temperature, without significant lift-off changes then verifies the calibration of the sensor and also that the sensor elements themselves are intact.

Another component of the life extension program for aircraft is the rapid and cost-effective inspection of engine components such as the slots of gas turbine disks and spools. Cracks often form in regions of fretting damage. The fretting damage
10 often leads to false positive crack detections with conventional eddy-current sensors, which severely limits the usefulness of conventional eddy-current sensors in this inspection. For a number of disks/spools, ultrasonic (UT) inspection is the current standard inspection method. The current UT threshold for "reliable" detection of cracks in fretting damage regions is thought to be between 0.150 and 0.250 inches
15 but there is an ongoing need to reliably detect smaller cracks, possibly as small as 0.060 to 0.080 inches in length. The JENTEK GridStation(System with the conformable MWM eddy-current sensor and grid measurement methods offers the capability to detect these small cracks in fretting regions, while eliminating the need for crack calibration standards other than to verify performance. Calibration can be
20 performed with the sensor in the middle of any slot on the engine disk. A scan of this slot is then performed first to verify that no crack existed at the calibration location. Then all slots on a disk are inspected without recalibration.

For the inspection of nonmagnetic disks, such as titanium disks, absolute electrical conductivity and proximity (lift-off) measurements can be performed with
25 MWM sensors. When a crack within a slot is encountered, it manifests itself by a distinct and repeatable drop in conductivity. FIGS 42a and 42b shows an example of repeated inspections on the same slots for a Stage 2 fan disk. No calibration standards were used to perform these inspections. At the start of the inspection, a selected area within a single slot (near the middle) was used for reference calibration
30 and was the only calibration required for the inspection of all of the slots. The inspection consisted of scanning each slot with the MWM probe along the entire length to within approximately 0.08 inches from the edge. These scans can be

performed in an incremental mode, where the sensor positioned is moved in increments of 1 to 2 mm, or in a continuous mode, where a position encoder automatically records the sensor position as the sensor is moved along the slot.

FIG 43 shows the results of the slot inspection in all 46 slots, with some slots showing the characteristic decrease in conductivity associated with a crack. Both FIGS 42a, 42b, and 43 present the absolute electrical conductivity without any normalization. The data from FIG 43 after normalization to account for edge effects are given in FIG 44. The slots that contained a distinct conductivity decrease and indicate the presence of a crack are marked in the legend for each plot. The arrows mark the slots where the UT inspection reported reject indications; the slots where the MWM detected cracks while the UT indications were below the reject threshold of 30% are encircled. In addition to conductivity vs slot location information, the grid measurement methods provide lift-off vs slot location information. The lift-off data appear to indicate the extent and relative severity of fretting.

Table 1 compares the findings of the MWM inspections with the UT inspection. The UT report identified rejected indications ($>30\%$) in nine of the 46 slots (slots # 9, 10, 11, 13, 22, 34, 35, 36, and 45). The disk slots had regions of fretting damage and, according to the UT inspection report, some of the slots contained cracks in the fretting damage regions. In contrast, the MWM with Grid methods reliably detected cracks within fretting damage regions in 14 slots, including all nine slots with rejected UT indications and five additional slots (slot # 1, 8, 14, 23, and 41). For verification, the well-known procedure for taking acetate replicas, that provide a "fingerprint" image of the surface, was adapted for the characterization of the surface condition within the slots. These replicas confirmed the MWM findings and showed images of cracks in fretting damage regions.

TABLE 1

Comparison of crack detection by MWM with reported UT indications for an F110 Stage 2 fan disk.

Slot #	UT Acceptance	UT Response %	MWM Detection	Crack Length as Verified by Replicas	Distance from slot edge to the nearest crack tip
1	Accept	23	Yes (E)	0.16 in.	0.23 in.
2	Accept	20	?(A/ART/ERT)	0.05 in.	0.16 in.
3	Accept	20	No (A)	No cracks	No cracks
4	Accept	20	No (A)	~0.015 in.	0.26 in.
5	Accept	23	No (A)	0.045 in.	(0.20 in.
6	Accept	20	?(A/ERT)	0.080	>0.12 in.
7	Accept	22	No (A)	No cracks	No cracks
8	Accept	21	Yes (E)	0.16 in.	0.32 in.
9	Reject	34	Yes (E)	0.20 in.	0.26 in.
10	Reject	116	Yes (E)	0.21 in.	0.2 in.
11	Reject	52	Yes (E)	0.22 in.	0.28 in.
12	Accept	9	No (A)	Possibly <0.015 in.	0.44 in.
13	Reject	47	Yes (E)	0.28 in.	0.20 in.
14	Accept	15	Yes (E)	0.13 in.	0.22 in.

5	15	<i>Accept</i>	10	<i>No (A)</i>	<i>Possibly 2 adjacent cracks (combined length (0.03 in.))</i>	<i>0.22 in.</i>
	16	<i>Accept</i>	10	<i>? (A/ART/ERT)</i>	<i>0.005 to 0.015 in. long intermittent cracks over 0.15 in</i>	<i>0.13 in.</i>
	17	<i>Accept</i>	12	<i>No (A)</i>	<i>No cracks</i>	<i>No cracks</i>
	18	<i>Accept</i>	8	<i>No (A)</i>	<i>No cracks</i>	<i>No cracks</i>
	19	<i>Accept</i>	9	<i>No (A)</i>	<i>Possibly one 0.03 in. crack?</i>	<i>0.29 in.</i>
	20	<i>Accept</i>	10	<i>No (A)</i>	<i>No cracks</i>	<i>No cracks</i>
	21	<i>Accept</i>	10	<i>No (A)</i>	<i>No cracks</i>	<i>No cracks</i>
	22	<i>Reject</i>	63	<i>Yes</i>	<i>0.44 in.</i>	<i>0.18 in.</i>
	23	<i>Accept</i>	15	<i>Yes</i>	<i>0.19 in</i>	<i>0.16 in.</i>
	29	<i>Accept</i>	7	<i>?No (A)</i>	<i>0.005 to 0.025 in. long intermittent cracks over 0.165</i>	<i>0.29 in.</i>
10	30	<i>Accept</i>	7	<i>? (A/ART/ERT)</i>	<i>Two adjacent cracks (comb. length (0.04 in.) plus two 0.05 in. cracks</i>	<i>0.26 in.</i>
	33	<i>Accept</i>	17	<i>?(A/ART)</i>	<i>Possibly 2 cracks, 0.02 in. each, about 0.1 in. apart</i>	
	34	<i>Reject</i>	120	<i>Yes</i>	<i>(0. 34 in.</i>	<i>0.25 in.</i>

35	<i>Reject</i>	68	<i>Yes</i>	<i>(0. 440 in</i>	<i>0.16 in</i>
36	<i>Reject</i>	54	<i>Yes</i>	<i>Not replicated</i>	<i>Not replicated</i>
41	<i>Accept</i>	12	<i>Yes</i>	<i>0.15 in.</i>	<i>0.36 in.</i>
45	<i>Reject</i>	41	<i>Yes</i>	<i>0.15 in.</i>	<i>0.21 in.</i>

- 5 Note: A – accept; E – evaluate (subject to an evaluation for repair/retire decisions); ART – accept on retest; ERT – evaluate on retest. These decisions depend on the threshold settings in the application module.

Additional measurements were also performed to illustrate the use of an encoder for determining the position in a slot and sequential thresholds for determining the acceptability of a disk slot. A typical set of measurement scan results is illustrated in FIG 50. The normalized electrical conductivity, measured with the MWM, is plotted against the sensor position, measured with the linear encoder. For each scan, the initial position of the sensor in the slot is set visually, usually by aligning a "corner" of the shuttle with the top surface of the slot. The conductivity is then measured as the shuttle is passed through the slot at a reasonably constant rate. The presence of a crack in the slot causes a reduction in the electrical conductivity as the sensor approaches the slot edge; as the sensor leaves the slot and goes off the edge, the effective electrical conductivity dips and becomes very large (eventually going off of the measurement grid). The measured electrical conductivity is normalized by the average conductivity near the center of the slot, prior to reaching the region of interest near the slot edge. Typically, the averaging was performed over the 0.8 to 1.3 inch region while the edge of the slot was in the 1.7 to 1.9 inch region; based on a limited number of scans, averaging from 0.5 to 1.3 inches does not appear to affect the measurement results. Although the cracks in some of the slots extend from the edge into the averaging region, the signal obtained from the cracks still fall into the "evaluate" region for the response, as described below. The minimum value measured for the normalized electrical conductivity is used to determine the presence of a crack.

In these tests the protocol for the acceptance decision for each slot is based on a sequential decision process. Two thresholds were used in this process and are

denoted by the labels A1 and A2 in FIG 50. In the decision process, each slot scan is compared to the two thresholds. A1 is the Retest/Evaluate threshold while A2 is the Accept/Retest threshold. If the normalized conductivity is above A2, then the decision is ACCEPT (e.g., both A1 and A2 pass). If the normalized conductivity is below A1 on the initial scan, the slot is thought to contain a flaw and EVALUATE is the final decision (e.g., both A1 and A2 do not pass). If the minimum normalized conductivity falls between A1 and A2 (e.g., A1 pass, A2 does not pass), the slot must be retested several times. Then the average of the inspection scans is used to reach a decision on the slot. Now, if the average is below A2, the final decision is EVALUATE upon retest. Otherwise, the outcome will be ACCEPT upon retest. In the case a slot is accepted upon retests, a supervisor concurrence and signature are required. Thus, for the case of "ACCEPT," no further action is required other than making a record. For the case of "RETEST," the slot has to be re-inspected several times. The Retested slot will then be labeled as either Accept or Evaluate.

"EVALUATE" means that the slot is likely to have a significant flaw that needs to be evaluated by other methods.

These thresholds are based on statistics for the disks being measured and the training set population. In this case, the threshold level A1 was set to provide an Evaluate decision for a 0.16 inch long crack while the threshold level A2 was set to be near the minimum in normalized conductivity for a 0.080 inch long crack. As the number of disks and slots inspected increases, the threshold levels can be determined with statistical methods based on the probability of detection for a given crack size. Representative threshold levels are $A1=0.992$ and $A2=0.995$

The minimum in the normalized conductivity for all of the slots on a disk are illustrated in FIG 51. The column bars denote the average values while the error bars show the standard deviation of the measurements. The effect of altering the threshold levels can be seen. The A1 (lower) threshold is typically set so that larger cracks (greater than 0.1 inches long) are evaluated after the first scan. The A2 (upper) threshold is set to differentiate the smaller cracks from the noise in unflawed slots. Again, the error bars denote the variability in the measurements so choosing an A2 threshold that passes through (or near) the error bars will have an intermediate (i.e., between zero and one) probability of detection. Once more cracks have been

characterized (e.g., replicated), better statistics can be applied to determining the thresholds that should be used for detection of a given crack size.

FIGS 45a and 45b illustrate the crack length dependence of the minimum in the normalized conductivity for the slots of Table 1 which had been replicated. In this case, three to 11 measurements were performed on each slot. Three different inspectors inspected each slot. The average and standard deviation for the measurements on each slot are illustrated in FIGS 45a and 45b. The vertical error bars represent the standard deviations in the measurements between the operators and illustrates the operator variability in the measurement results. The horizontal error bars denote the effective crack length due to multiple cracks or clusters of cracks greater than 0.005 inches long. The slot number is given on the right side of each data point. The thresholds indicate the evaluate (A1) and retest (A2) levels for the minimum in the normalized conductivity. Clearly, adjusting the retest level (A2) slightly will affect the probability of detection of the smaller cracks, such as the 0.080" and 0.050" long cracks (slots 6 and 2, respectively). The minimum detectable crack size depends upon the selection of the detection thresholds and the variability of the instrument, operators, and other noise factors. The detection thresholds set the minimum allowable reduction in the normalized conductivity for an acceptable scan. Choosing thresholds beyond the measurement "noise" level that minimizes the number of false indications also sets the minimum detectable crack size.

The use of MWM sensors and Grid measurement methods can also provide a more meaningful assessment of weld quality than conventional inspection methods. The high cost and complexity of titanium welding are caused by special cleaning and shielding procedures to preclude contamination. Quality control of titanium welds includes, among other things, inspection for contamination. Currently, titanium welds are accepted or rejected based on surface color inspection results, even though the surface color has not been a reliable indicator of weld contamination level.

The capability of the MWM to characterize contamination of the welds was demonstrated on several test specimens. Autogenous GTA welds were fabricated in six titanium Grade 2 plates with shielding gases that included high purity argon,

three levels of air contamination, and two levels of CO contamination. The measurements were performed in a point-by-point "scanning" mode across each weld so that each scan included the titanium, Grade 2 base metal, heat-affected zones on each side of a weld, and weld metal. The footprint of the MWM sensor
5 was ½ in. by ½ in.

FIG 48 shows an MWM measured electrical conductivity profile across the welds obtained at a frequency 400 kHz. All measured conductivity values were normalized by the maximum conductivity in the base metal. The dip in conductivity in each curve corresponds to the weld metal, whereas the left and right "shoulders"
10 correspond to the base metal. In the specimen containing the weld fabricated with pure argon as the shielding gas, the conductivity of the weld metal is only slightly lower than conductivity of the base metal. There is a general trend of conductivity decrease with contamination level. This trend is illustrated in FIG 49, for excitation frequencies of 400 kHz and 1.58 MHz, as air contamination in the shielding gas
15 reduces the conductivity of the titanium weld metal. In this plot, the conductivity of weld metal is normalized by the minimum measured conductivity of weld fabricated in pure argon.

Periodic field eddy-current sensors can also be used to detect overheating damage in gun barrels or other steel components that may be coated with another
20 material or uncoated.

As an example, measurements were performed on two semi-cylindrical samples from a longitudinally sectioned 25-mm gun barrel. The section of this particular gun barrel, located between axial positions 8 in. and 24 in. away from the start of the rifling, had experienced overheating. Sample 2a (in FIGS 52 and 53)
25 was removed from the overheated section and from the part of the gun barrel between the 7-in. and 16-in. axial positions. Sample 5 (in FIGS 52 and 53) is a section of the gun barrel not affected by overheating and from the part of the gun barrel between the 41-in. and 51-in. axial positions. The gun barrels were made of a low-alloy steel, which was heat-treated originally to obtain tempered martensite
30 microstructure. In the overheated section, there was a distinct heat-affected zone around the bore where the resulting ferritic-bainitic microstructure suggests the temperatures could have been at least 900 to 1100(F. The inside surface of the gun

barrel was plated with electrodeposited chromium where the thickness ranged from 0.10 mm to 0.20 mm.

FIGS 52 and 53 show a representative set of MWM measurements on gun barrel samples. These measurements were performed with a JENTEK GridStation using magnetic permeability-lift-off measurement grids at a frequency of 100 kHz. Axial scans along the length of the samples were performed with the MWM sensor windings oriented both parallel (Orientation #1) and perpendicular (Orientation #2) to the gun barrel axis. FIG 52 shows the results of the MWM axial scans in terms of effective relative magnetic permeability vs axial position (within each sample) along the barrel axis. Note that the MWM is most sensitive to permeability in the direction perpendicular to its longer winding segments. The data reveal that the longitudinal effective permeability measured with Orientation #2 in Sample 5 (not affected by overheating) is higher than the transverse permeability measured with Orientation #1, indicating some anisotropy. The MWM data for Sample 2a show that overheating dramatically increased the longitudinal effective permeability measured with Orientation #2 in sample 2a compared to the transverse effective permeability, measured with Orientation #1. FIG 53 shows the effective permeability is plotted vs distance from the start of rifling along the barrel axis. The MWM measured results are shown in solid lines while the dotted lines indicate a possible trend in relative magnetic permeability in the region between Sample 2a and Sample 5.

These measurements indicate that the MWM probe response was characteristic of a ferromagnetic material. Note that the low-alloy steel is a ferromagnetic material whereas the electrodeposited chromium plating is nonmagnetic unless the plating had been exposed to high temperatures for sufficiently long time to effect diffusion of iron into the deposited plating. At a frequency of 100 kHz, the estimated depth of sensitivity in pure chromium is estimated to be approximately 0.5 mm, which is greater than the thickness of the electrodeposited chromium plating. As result, the MWM "sees" beyond the plated layer of chromium and the measurements reflect the effective permeability and microstructural conditions of the low-alloy steel. Thus, the unique bidirectional permeability measurement capabilities of the MWM provide sensitivity to the

property changes caused by overheating. For rapid inspections of gun barrels, cylindrical probes having MWM sensors in both parallel and perpendicular orientations can be used so that a single measurement scans provides both measurements of the effective permeability.

- 5 Periodic field eddy-current sensors can also be used to detect and quantify the depth of subsurface cracks. As an example, consider the measurement illustrated in FIG 54. In this case, two-frequency conductivity--lift-off measurements were performed on the back surface of a nickel alloy sample having notches that simulate crack-like flaws on the front surface. FIG 54 shows a schematic of the flaw pattern
- 10 in the sample and the MWM measured conductivity scan at two frequencies. A simple ratio of the two-frequency absolute conductivity measurements (after passing the raw data through the two-unknown measurement grid) provides a robust correlation with distance from the flaw tip to the back surface. This method can be used to detect and determine depth or distance to hidden cracks for both fatigue
- 15 cracks and, for some components, cracking associated with corrosion fatigue.

While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

- 20 References incorporated by reference in their entirety:

Air Force Association (1997), "Air Force Almanac", May 1997.

Auld, B.A. and Moulder, J.C. (1999), "Review of Advances in Quantitative Eddy-Current Nondestructive Evaluation," *Journal of Nondestructive Evaluation*, vol. 18, No. 1.

- 25 **Committee On Aging of US Air Force Aircraft** (1997), "Aging of US Air Force Aircraft", ISBN 0-309-05935-6, 1997.

Friedel, J. (1964), *Dislocations*, Pergamon Press.

Goldfine, N., A. Washabaugh, K. Walrath, P. Zombo, and R. Miller (1998), "Conformable Eddy-Current Sensors and Methods for Gas Turbine Inspection and

Health Monitoring", ASM International, Gas Turbine Technology Conference, Materials Solutions '98, Rosemont, IL.

Goldfine, N., D. Schlicker, and A. Washabaugh (1998 NASA), "Surface-Mounted Eddy-Current Sensors for On-Line Monitoring of Fatigue Tests and for Aircraft

- 5 Health Monitoring," 2nd NASA/FAA/DoD Conference on Aging Aircraft.

Kramer, I.R. (1974), Metallurgical Transactions, v.5, p. 1735.

Regler, F. (1937), Zeitschrift für Elektrochemie, v. 43, p. 546

Regler, F. (1939), Verformung und Ermüdung Metallischer Werkstoffe.

Suresh, S. (1998), Fatigue of Materials, Second Edition, Cambridge University

- 10 Press.

Taira, S., and Hayashi, K. (1966), Proc. 9th Japanese Congress of Testing Materials.

Weiss, V. and Oshida, Y. (1984), "Fatigue Damage Characterization using X-Ray Diffraction Line Analysis", in *Fatigue 84*, p 1151, Butterworth.

RELATED DOCUMENTS

- 15 This present invention is related to:

1. Navy Phase I Proposal, titled "Application of the Meandering Wire

Magnetometer to Detection and Quantification of Cumulative Fatigue Damage in Aircraft Structural Components", Topic #N95-033, dated 1/12/95

2. Navy Phase I Final Report, titled "Application of the Meandering Wire

- 20 Magnetometer to Detection and Quantification of Cumulative Fatigue Damage in Aircraft Structural Components", dated April 30, 1996, Contract

#N00019-95-C-0220

3. Navy Phase II Proposal, titled "Application of the Meandering Wire

Magnetometer to Detection and Quantification of Cumulative Fatigue Damage in

- 25 Aircraft Structural Components", Topic #N95-033, dated 5/17/96

4. Navy Phase II Final Report, titled "Application of the Meandering Wire

Magnetometer to Detection and Quantification of Cumulative Fatigue Damage in Aircraft Structural Components", dated February 16, 1999, Contract

#N00421-97-C-1120

5. Air Force Phase I Proposal, titled "Portable Accumulated Fatigue Damage Inspection System Using Permanently Mounted and Wide-Area Imaging MWM-Arrays", Topic #AF99-286, dated 1/11/99
6. Air Force Phase II Proposal, titled "Portable Accumulated Fatigue Damage Inspection System Using Permanently Mounted and Wide-Area Imaging MWM-Arrays", Topic #AF99-286, dated 12/3/99
7. Air Force Phase I Final Report, titled "Portable Accumulated Fatigue Damage Inspection System Using Permanently Mounted and Wide-Area Imaging MWM-Arrays", dated March 10, 2000, Contract #F09650-99-M-1328
- 10 8. Technical Paper titled "Surface-Mounted Eddy-Current Sensors for On-line Monitoring of Fatigue Tests and for Aircraft Health Monitoring", presented at the Second Joint NASA/FAA/DoD Conference on Aging Aircraft, August 1998
9. JENTEK Sensors Trip Report to Tinker AFB, dated July 6, 1999
10. Technical Abstract titled "New MWM Arrays with High Resolution and Increased Depth of Sensitivity for Quantitative Imaging of "Hidden" Fatigue and Corrosion over Wide Areas, submitted to the Third Joint NASA/FAA/DoD Conference on Aging Aircraft, September 1999
- 15 11. Technical Paper titled "Recent Applications of Meandering Winding Magnetometers to Materials Characterization", presented at The 38th Annual British Conference on NDT, September 13-16, 1999.
12. Technical Paper titled "Anisotropic Conductivity Measurements for Quality Control of C-130/P-3 Propeller Blades Using MWM(-Sensors with Grid Methods", presented at the Fourth Joint DoD/FAA/NASA Conference on Aging Aircraft, May 16, 2000.
- 25 13. Presentation Slides titled "Anisotropic Conductivity Measurements for Quality Control of C-130/P-3 Propeller Blades Using MWM(-Sensors with Grid Methods", presented at the Fourth Joint DoD/FAA/NASA Conference on Aging Aircraft, May 6, 2000.
14. FAA Year Two Final Report titled "Development of Conformable Eddy-Current Sensors for Engine Component Inspection," dated August 4, 2000, Contract #DTFA0398-D00008.
- 30

15. Technical Paper titled "Application of MWM-Array Eddy-Current Sensors to Corrosion Mapping", presented at the 4th International Aircraft Corrosion Workshop, August 22, 2000, which are incorporated herein by reference.

CLAIMS

What is claimed is:

1. A test circuit comprising:
 - a primary winding having parallel extended portions for imposing a
5 spatially periodic magnetic field of at least two spatial wavelengths in a test
substrate when driven by an electric current;
 - an array of sensing elements for sensing the response of the test
substrate to the imposed magnetic field, at least one sensing element
positioned between the extended portions of a half wavelength of the
10 primary winding located every other half wavelength of the primary
winding, extended portions of the individual sensing elements being parallel
to the extended portions of the primary winding; and
 - a series connection between the sensing elements in every other half
wavelength perpendicular to the extended portions of the primary winding to
15 group the individual sensing elements, the series connection being in a
different plane than the primary windings; and
 - separate output connections to each of plural groups of sensing
elements located along the length of the extended portions of the primary
winding.
- 20 2. A test circuit as claimed in Claim 1 wherein the individual sensing elements
are located in at least two adjacent half wavelengths of the primary winding.
3. A test circuit as claimed in Claim 2 wherein the individual sensing elements
in adjacent half wavelengths are spatially offset parallel to the extended
portions of the primary winding.
- 25 4. A test circuit as claimed in Claim 3 wherein the spatial offset is one half the
length of an individual sensing element parallel to the extended portions of
the primary winding.

5. A test circuit as claimed in Claim 1 wherein all sensing elements are positioned at least one half-wavelength away from the ends of the extended portions of the primary winding.
6. A test circuit as claimed in Claim 2 further comprising additional conductors near the ends of the spatially offset sensing elements, along the length of the extended portions of the primary winding, to maintain the spatial periodicity of the conductors.
7. A test circuit as claimed in Claim 2 further comprising extensions of the endmost individual spatially offset sensing elements between the sensing elements in the adjacent half wavelength.
8. A test circuit as claimed in Claim 1 where one individual sensing element is located every other half wavelength to provide a single response.
9. A test circuit as claimed in Claim 1 where the sensing elements are in a different plane than the primary windings.
10. A test circuit as claimed in Claim 2 where the array of sensing elements has one individual sensing element located every other half wavelength but an array of sensing elements located in adjacent half wavelengths.
11. A test circuit as claimed in Claim 1 where every other half wavelength of the primary winding is connected together in series.
12. A test circuit as claimed in Claim 11 wherein a single pair of connector leads is connected to each set of primary winding half-wavelengths.
13. A test circuit as claimed in Claim 1 where the primary winding is distributed in two planes with extended portions of the primary windings located over one another and the connectors between the extended portions of the primary windings offset by one half-wavelength.

-
14. A test circuit as claimed in Claim 1 where each sensing element provides an absolute response.
15. A test circuit as claimed in Claim 1 where at least one of the sensing elements provides a differential response.
- 5 16. A test circuit as claimed in Claim 1 that is conformable to inspect curved parts.
17. A test circuit as claimed in Claim 1 placed on a curved and compliant substrate to inspect a curved part.
18. A test circuit as claimed in Claim 1 that is scanned across the surface of a
10 part for the detection of flaws.
19. A test circuit as claimed in Claim 18 where the longest dimension of the flaw is substantially perpendicular to the extended portions of primary winding.
20. A test circuit as claimed in Claim 1 that is mounted against the surface of a
15 part for detecting and determining the location of flaws.
21. A test circuit as claimed in Claim 20 where the longest dimension of the flaw is substantially perpendicular to the extended portions of primary winding.
22. A test circuit as claimed in Claim 1 where the lift-off is varied during
20 calibration.
23. A test circuit as claimed in Claim 1 where the lift-off is varied during measurements.

24. A test circuit as claimed in Claim 1 where the part under test temperature is varied to vary the part conductivity for calibration.
25. A test circuit as claimed in Claim 1 where the part under test temperature is varied to vary the part conductivity for measurements.
- 5 26. A test circuit as claimed in Claim 1 where the part under test permeability is varied using a bias field during calibration.
27. A test circuit as claimed in Claim 1 where the part under test permeability is varied using a bias field during measurements.
- 10 28. A test circuit as claimed in Claim 1 where measurements are made at multiple operating conditions, including multiple lift-offs, temperatures, or bias fields.
- 15 29. A test circuit as claimed in Claim 1 where measurements grids with one or more dimensions are generated in advance and used as databases to look up and interpolate the electrical and geometric properties of interest at the location measured by each individual sensing element.
30. A test circuit as claimed in Claim 29 where the electrical and geometric properties at each sensing element location are correlated with dependent properties of interest.
- 20 31. A test circuit as claimed in Claim 29 where the array is scanned to build images of electrical properties across the surface of a part.
32. A test circuit as claimed in Claim 30 where multiple frequencies are used to measure property variations with depth at each sensing element.

33. A test circuit as claimed in Claim 31 where multiple frequencies are used to create three-dimensional images of properties.
34. An apparatus comprising:
- 5 a primary winding of parallel winding segments that impose a spatially periodic magnetic field, with at least two periods in a single plane, in a test substrate when driven by electric current;
- one or more sensing windings that link flux over regions of incremental area along the length of a drive winding segment, with the sensing elements located in a second plane, with a series connection between
- 10 sensing elements in every other half wavelength; and
- leads to the sensing elements exiting the sensor footprint in a direction perpendicular to the direction of the drive winding segments.
35. A test circuit comprising:
- 15 a meandering primary winding having concentric substantially closed winding segments for imposing a spatially periodic magnetic field in the radial direction of at least two spatial wavelengths in a test substrate; and
- at least one sensing element for sensing the response of the test substrate to the imposed magnetic field.
36. A test circuit as claimed in Claim 35, where the closed winding segments are
- 20 circular.
37. A test circuit as claimed in Claim 35, where the closed winding segments follow a shape in the material under test.
38. A test circuit as claimed in Claim 35, with at least one sensing element positioned between the concentric circular segments of a half wavelength of
- 25 the primary winding and located every other half wavelength of the primary winding, and with extended portions of the individual sensing elements concentric with the concentric circular segments of the primary winding.

39. A test circuit as claimed in Claim 38 where a single sensing element is placed within in each half wavelength of the primary winding.
40. A test circuit as claimed in Claim 39 where separate output connections are made to the sensing element in each half wavelength.
- 5 41. A test circuit as claimed in Claim 40 where at least two of the sensing elements are connected together to provide a common output.
42. A test circuit as claimed in Claim 41 where all of the sensing elements are connected together to provide single output.
43. A test circuit as claimed in Claim 42 where the sensing elements are in a
10 different plane than the primary windings.
44. A test circuit as claimed in Claim 38 where the circumference of at least two half wavelengths of the primary winding is spanned by more than one sensing element and the sensing elements spanning the same angular dimensions in every other half-wavelength of the primary winding are
15 connected together; and separate output connections are made to each group of sensing elements spanning the circumference of the primary winding.
45. A test circuit as claimed in Claim 44 where the sensing elements are connected together with a series connection.
46. A test circuit as claimed in Claim 45 where the series connections are in a
20 different plane than the primary winding.
47. A test circuit as claimed in Claim 44 wherein the individual sensing elements are located in at least two adjacent half wavelengths of the primary winding.

-
48. A test circuit as claimed in Claim 47 wherein the individual sensing elements in adjacent half wavelengths are rotationally offset from one another.
49. A test circuit as claimed in Claim 48 wherein the rotational offset is one half
5 the angle spanned by an individual sensing element.
50. A test circuit as claimed in Claim 49 further comprising extensions of the inner-most rotationally offset sensing elements between the sensing elements in the inner adjacent half wavelength.
51. A test circuit as claimed in Claim 38 where the sensing elements are in a
10 different plane than the primary windings.
52. A test circuit as claimed in Claim 35 that is conformable to inspect curved parts.
53. A test circuit as claimed in Claim 35 placed on a curved and compliant substrate to inspect a curved part.
- 15 54. A test circuit as claimed in Claim 35 that is mounted against a surface of a part for the detection of flaws.
55. A test circuit as claimed in Claim 38 where the part under test temperature is varied to vary the part conductivity for calibration.
56. A test circuit as claimed in Claim 38 where the part under test temperature is
20 varied to vary the part conductivity for measurements.
57. A test circuit as claimed in Claim 38 where measurements grids with one or more dimensions are generated in advance and used as databases to look up

and interpolate the electrical and geometric properties of interest at the location measured by each individual sensing element.

58. A test circuit as claimed in Claim 57 where the electrical and geometric properties at each sensing element location are correlated with dependent properties of interest.
59. A test circuit as claimed in Claim 57 where the array is scanned to build images of electrical properties across the surface of a part.
60. A test circuit as claimed in Claim 58 where multiple frequencies are used to measure property variations with depth at each sensing element.
61. A test circuit as claimed in Claim 59 where multiple frequencies are used to create three-dimensional images of properties.
62. A test circuit as claimed in Claim 38 wherein the sensing windings link flux over regions of incremental area along the length of a drive winding segment, the sensing windings are located in a second plane with each sensing winding linking magnetic flux every other half period, and the leads to the sensing elements exit the sensor footprint radially, perpendicular to the direction of the drive winding segments.
63. A test circuit as claimed in Claim 38 further comprising a hollow center region for placement around a fastener shaft.
64. A test apparatus comprising:
concentric circular winding segments that impose a radial spatially periodic magnetic field, with at least two periods in a single plane, in a test substrate when driven by electric current; and

one or more sensing windings that link flux over each region bordered by the drive winding segments and concentric with the drive winding segments.

65. A test circuit comprising:
- 5 a primary winding of parallel extended winding segments that impose a spatially periodic magnetic field, with at least two periods, in a test substrate when driven by electric current;
- 10 an array of sensing windings for sensing the response of the test substrate to the imposed magnetic field, at least two of the sensing windings in different half-wavelengths of the primary winding linking incremental areas of the magnetic flux and being offset along the lengths of the parallel winding segments to provide material response measurements over different locations when the circuit is scanned over the test material in a direction perpendicular to the extended winding segments; and
- 15 the sense windings confined to a single plane and the drive windings confined to a single plane.
66. A test circuit as claimed in Claim 65 wherein the parallel extended winding segments of the primary winding are formed by parallel extended portions of adjacent drive coils.
- 20 67. A test circuit as claimed in Claimed 66 wherein every other drive coil is connected in series on one side of the primary and the remaining drive coils are connected in series on the opposite side of the primary.
68. A test circuit as claimed in Claim 66 wherein a single pair of connector leads is connected to each set of primary winding half-wavelengths.
- 25 69. A test circuit as claimed in Claim 65 where the primary winding is distributed in two planes with extended portions of the primary windings

located over one another and the connectors between the extended portions of the primary windings offset by one half-wavelength.

70. A test circuit as claimed in Claim 65 where the sensing windings linking incremental areas are located in every other half-wavelength while additional sensing windings that extend along a substantial length of the primary windings are located in the intermediate half-wavelengths of the primary winding.
71. A test circuit as claimed in Claim 70 where output connections of at least two of the sensing windings of substantial length are connected in series.
72. A test circuit as claimed in Claim 70 where extra conductors are placed in the endmost half-wavelengths, without secondary elements, to maintain the spatial periodicity of the conductors in the test circuit.
73. A test circuit as claimed in Claim 70 where extra conductors are placed at the ends of the sensing elements to maintain the spatial periodicity of conductors in the test circuit.
74. A test circuit as claimed in Claim 70 where the sensing windings linking incremental areas have extension loops on the winding side opposite the connector leads to provide essentially equivalent coupling of magnetic flux between offset sensing windings.
75. A test circuit as claimed in Claim 65 where the sensing windings are offset a distance one-half the length of extended portions of the sensing windings so that sensed responses cover overlapping areas.
76. A test circuit as claimed in Claim 66 where the array of sensing windings has at least one sensing coil every half wavelength, distance between sensing coils within an adjacent pair of extended portions being increased by the

length of the sensing coils at least each half wavelength, each individual sensing coil having separate output connectors.

- 5 77. A test circuit as claimed in Claim 76 where the distance from the ends of the sensing coils to the connectors between the extended portions of the primary is kept essentially constant as the distance between the sensing coils is increased.
78. A test circuit as claimed in Claim 77 where the sensing coils provide an absolute response to the material properties.
- 10 79. A test circuit as claimed in Claim 77 where the sensing coils provide a differential response to the material properties parallel to the extended windings.
- 15 80. A test circuit as claimed in Claim 77 where the sensing coils in every other half wavelength provide an absolute response to the material properties while the sensing coils in the intermediate half meanders provide a differential response to the material properties parallel to the extended windings.
81. A test circuit as claimed in Claim 80 where extra conductors are placed in the endmost half-wavelengths, without secondary windings, to maintain the spatial periodicity of the conductors in the test circuit.
- 20 82. A test circuit as claimed in Claim 80 where extra conductors are placed at the ends of the sensing elements to maintain the spatial periodicity of conductors in the test circuit.
- 25 83. A test circuit as claimed in Claim 80 where extra conductors are placed between the inner coils for pairs of differential elements to ensure that each individual coil is surrounded by the same conductor pattern.

84. A test circuit as claimed in Claim 83 where the individual coils for the differential elements are separated by more than a coil length.
85. A test circuit as claimed in Claim 80 where at least one of the differential elements is rotated so that the coils are offset equal distances on either side of the centerline of a half wavelength of a primary meander.
- 5
86. A test circuit as claimed in Claim 85 where the rotated differential element is perpendicular to the extended windings of the primary.
87. A test circuit as claimed in Claim 77 where measurements grids with one or more dimensions are generated in advance and used as databases to look up and interpolate the electrical and geometric properties of interest at the location measured by each individual sensing element.
- 10
88. A test circuit as claimed in Claim 87 where the electrical and geometric properties at each sensing element location are correlated with dependent properties of interest.
- 15
89. A test circuit as claimed in Claim 87 where the array is scanned to build images of electrical properties across the surface of a part.
90. A test circuit as claimed in Claim 88 where multiple frequencies are used to measure property variations with depth at each sensing element.
91. A test circuit as claimed in Claim 89 where multiple frequencies are used to create three-dimensional images of properties.
- 20
92. A test circuit comprising:
a meandering primary winding having extended portions for imposing a spatially periodic magnetic field of at least two spatial wavelengths in a test substrate; and

- a sensing winding array of sensing elements, with a sensing element positioned every half wavelength of at least two spatial wavelengths between respective adjacent extended portions of the primary winding for sensing the response of the test substrate to the imposed magnetic field, the sensing elements including sensing coils for linking flux over incremental areas between adjacent extended portions, at least one absolute sensing coil every half wavelength and at least two differential sensing coils every other half wavelength, distance between sensing coils within an adjacent pair of extended portions being increased each wavelength, each individual sensing coil having separate output connectors, distances from the ends of the sensing coils to connectors between the extended portions of the primary being substantially constant as the distance between the sensing coils is increased.
- 5
- 10
93. A test circuit as claimed in Claim 87 wherein the extended portions of the primary winding are formed by individual drive coils having parallel extended portions with every other drive coil connected in series on one side of the primary and the remaining drive coils connected in series on the opposite side of the primary.
- 15
94. A test circuit as claimed in Claim 77 that is conformable to inspect curved parts.
- 20
95. A test circuit as claimed in Claim 77 placed on a curved and compliant substrate to inspect a curved part.
96. A test circuit as claimed in Claim 89 where the part being scanned is an engine disk slot.
- 25
97. A test circuit as claimed in Claim 96 where two or more sensing coils are located at the same position along half-wavelength but in different half-wavelengths of the primary to provide property measurement

redundancy at a specific test material location with a single measurement scan.

98. A test circuit as claimed in Claim 97 where five sensing coils are located at the same position along a half wavelength but in different half wavelengths of the primary.
99. A test circuit as claimed in Claim 78 further comprising connection leads to the sensing element that are offset from the centerline of the half meander, a second loop having extended portions substantially parallel to the connection leads and symmetrically located on the opposite side of the centerline, and with a differential connection between the sensing element and the second loop.
100. A test circuit as claimed in Claim 80 further comprising connection leads to the sensing element that are offset from the centerline of the half meander, a second loop having extended portions substantially parallel to the connection leads and symmetrically located on the opposite side of the centerline, and with a differential connection between the sensing element and the second loop.
101. An eddy-current sensor for creating a spatially periodic magnetic field of at least two periods comprising:
a primary winding having parallel extended winding segments and driven by an electric current; and
each half wavelength of the primary windings being formed by an individual drive coil having parallel extended portions with every other drive coil connected in series on one side of the primary and the remaining drive coils connected in series on the opposite side of the primary.
102. A method for creating a spatially periodic magnetic field, with at least two periods, for eddy current sensors comprising:

providing a primary winding of parallel extended winding segments, each parallel extended winding segments being formed by parallel extended portions of adjacent individual drive coils;

5 driving current through individual drive coils in alternating clockwise and counterclockwise directions such that current through immediately adjacent extended portions of the drive coils are in common directions and a spatially periodic magnetic field, with at least two periods, is imposed in a test substrate.

103. A method as claimed in Claim 101 wherein a single pair of connector leads
10 is connected to each set of primary winding half-wavelengths.

104. A method as claimed in Claim 102 further comprising providing parallel
extended winding segments distributed over two planes, the extended
windings of the primaries located over one another and the connectors
between the extended portions of the primary windings offset by one
15 half-wavelength.

105. A test circuit comprising a plurality of adjacent individual drive coils having
parallel extended portions with current flow in any adjacent extended
portions being in a common direction and all the drive coils together
imposing a stationary periodic magnetic field, with at least two periods, in a
20 test substrate.

106. A method for monitoring damage at a fastener comprising:
mounting a spatially periodic field eddy-current sensor to a test
substrate near a fastener; and
sensing response of the test substrate to a magnetic field imposed by
25 the eddy-current sensor.

107. A method as claimed in Claim 106 where the sensor is mounted under the
head of the fastener.

-67-

108. A method as claimed in Claim 106 where the sensor is mounted between the layers of the structure attached by the fastener.
109. A method as claimed in Claim 106 where a sensor is mounted at both ends of the fastener.
- 5 110. A method as claimed in Claim 106 where the sensor is a circular spatially periodic field eddy-current sensor surrounding a fastener.
111. A method as claimed in Claim 106 where the damage is in the form of a crack.
- 10 112. A method as claimed in Claim 106 further comprising at least two circular spatially periodic field eddy-current sensors each mounted around a fastener and a single cable connects the drive and sense conductors to the data acquisition system.
113. A method as claimed in Claim 112 where the each sensor provides a separate output.
- 15 114. A method as claimed in Claim 113 where the output is an absolute property measurement.
115. A method as claimed in Claim 112 where the sense conductors from pairs of sensing elements are connected together to provide a differential measurement.
- 20 116. A method as claimed in Claim 112 where separate drive connections are made to each sensor.
117. A method as claimed in Claim 116 where the sense conductors are connected together to provide a common output connection.

118. A method as claimed in Claim 112 where the drive conductors are connected together to provide a common drive signal.
119. A method as claimed in Claim 118 where the sense conductors are connected together to provide a common output connection.
- 5 120. A method as claimed in Claim 106 where the sensor is mounted in a cylindrical support material shaped in the form of a washer for mounting under a fastener head.
121. A method as claimed in Claim 120 where the support material withstands compressive loads.
- 10 122. A method for estimating material properties from an inductive sensor comprising:
creating measurement grids that provide primary and sense windings in multiple layers;
storing the measurement grids as databases of sensor responses to a
15 predetermined range of at least two unknown properties; and
using the databases to convert sensor responses into estimates of at least two unknown properties.
123. A method as claimed in Claim 122 where finite element modeling is used to generate databases of responses.
- 20 124. A method as claimed in Claim 122 where analytical models are used to generate databases of responses.
125. A method as claimed in Claim 122 where finite difference modeling is used to generate databases of responses.
126. A method of fabricating a damage standard comprising:

-69-

attaching an electromagnetic sensor to a critical surface of test material;

mechanically loading the test material and measuring a change in the electrical properties under the surface of the sensor; and

5 removing the mechanical load when the change in electrical properties indicates a prescribed level of damage.

127. A method as claimed in Claim 126 where the damage is a fatigue crack.
128. A method as claimed in Claim 126 where the sensor is a spatially periodic field eddy-current sensor and the test material is a metal.
- 10 129. A method as claimed in Claim 128 where the sensor is flexible for conforming to the shape of the surface of the test material.
130. A method as claimed in Claim 129 where the sensor is an array with multiple sensing elements for producing a spatial image of the damage.
131. A method as claimed in Claim 126 where the sensor is a dielectrometer and
15 the test material is a dielectric material.
132. A method as claimed in Claim 126 further comprising the use of a temperature measurement sensor to correct for electrical property variations with temperature.
133. A method as claimed in Claim 126 further comprising the use of multiple
20 sensors to monitor multiple regions.
134. A method as claimed in Claim 133 where the sensors include arrays with multiple sensing elements for producing spatial images of the damage.

-
135. A method as claimed in Claim 127 further comprising the use of a sensor to monitor the change in crack length with the number of fatigue cycles.
136. A method as claimed in Claim 127 further comprising the use of multiple frequency measurements to monitor crack depth.
- 5 137. A method as claimed in Claim 127 where the damage is pre-crack damage.
138. A method as claimed in Claim 127 further comprising mounting the sensor between layers of the test material.
139. A method as claimed in Claim 128 further comprising the use of a sealant to provide mechanical support.
- 10 140. A method as claimed in Claim 126 further comprising shaping the test material to create a stress distribution so that fatigue damage initiates under the sensor.
141. A method as claimed in Claim 140 where the test material is formed into a dogbone shape and the center section is thinned to localize fatigue damage.
- 15 142. A method as claimed in Claim 141 where the test material further comprises reinforcement ribs on the edges.
143. A method as claimed in Claim 142 where the test material further comprises radius cutouts on both sides of the thinned section.
144. A method as claimed in Claim 140 where the test material further comprises radius cutouts on both sides of the thinned section.
- 20

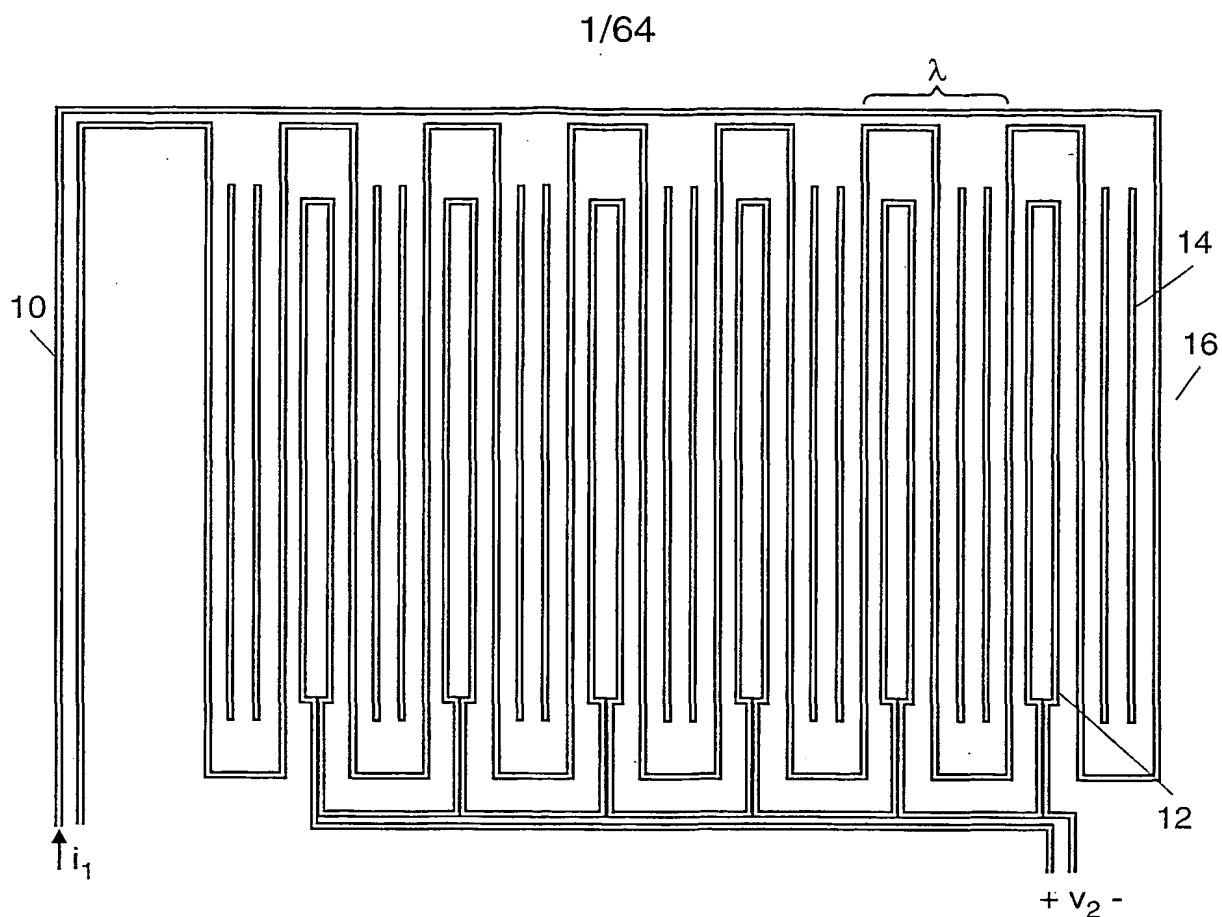


FIG. 1

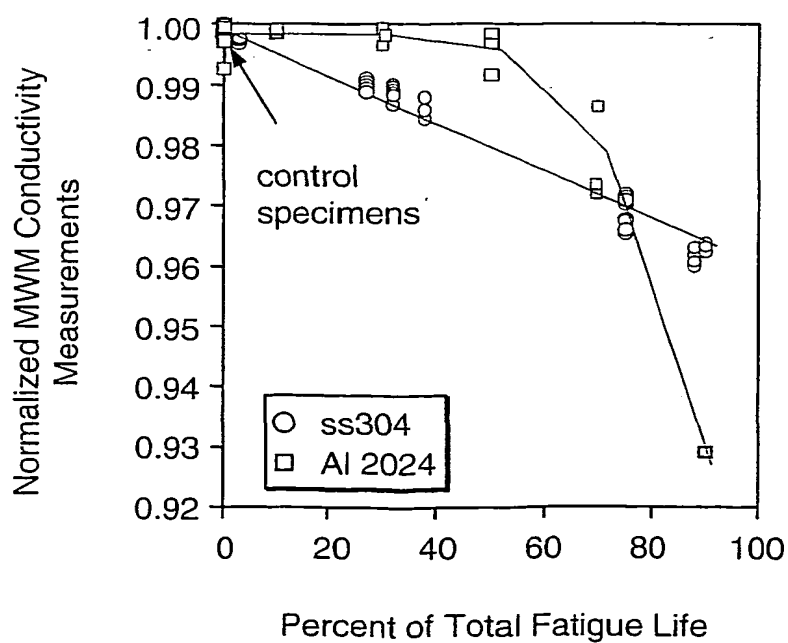


FIG. 2

2/64

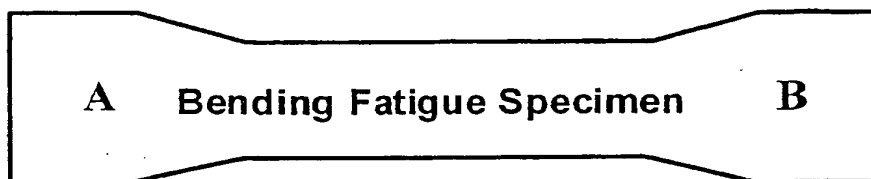


FIG. 3a

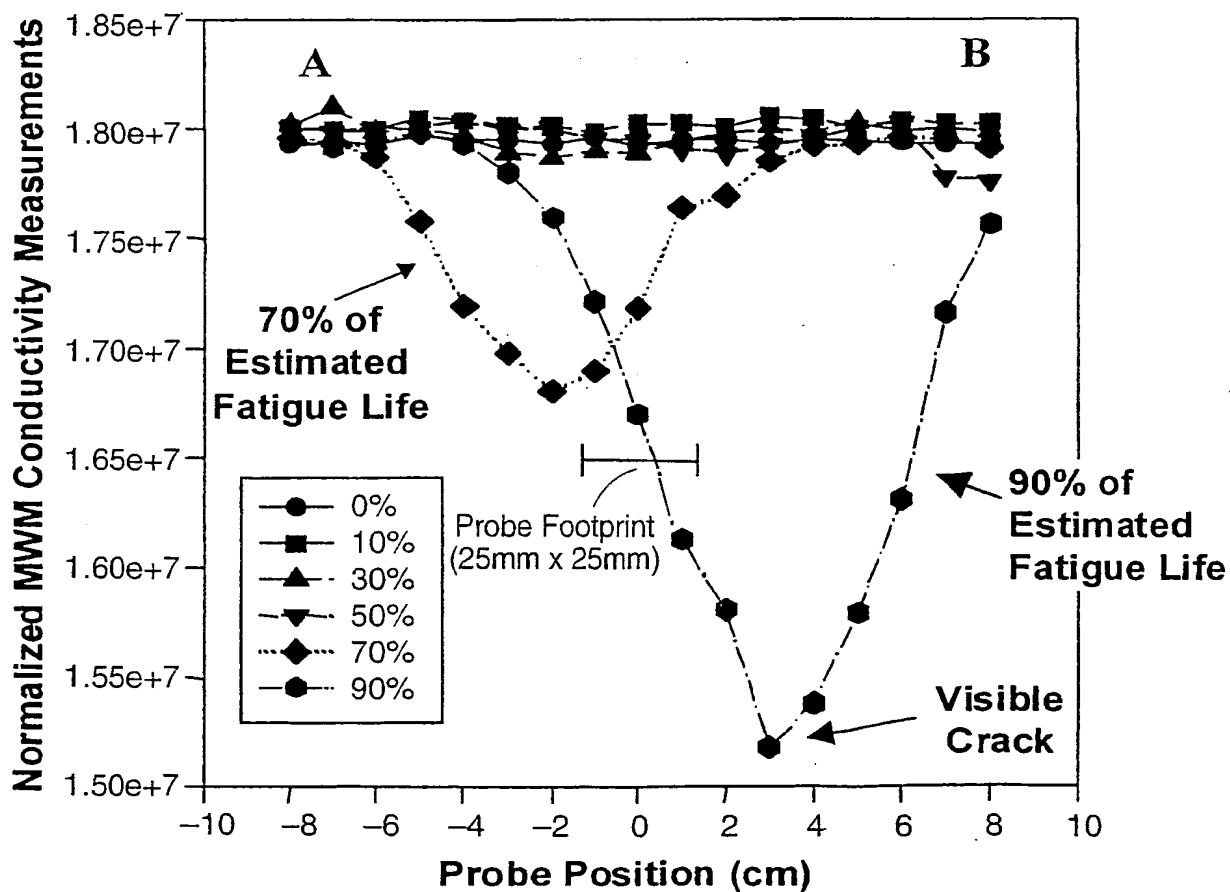


FIG. 3b

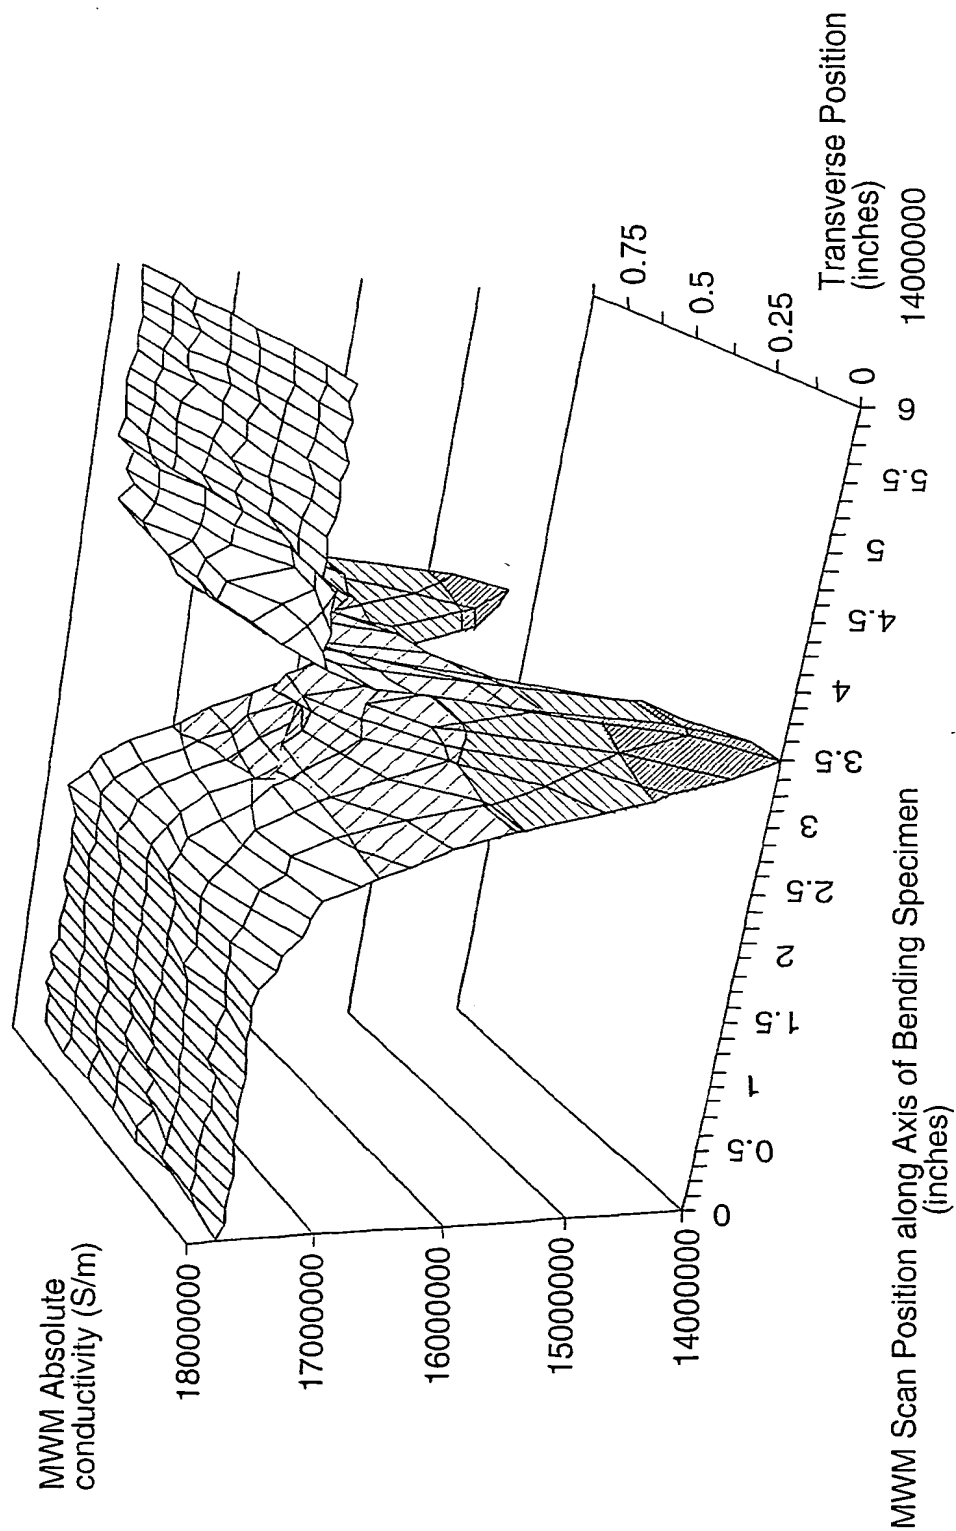


FIG. 4b

4/64

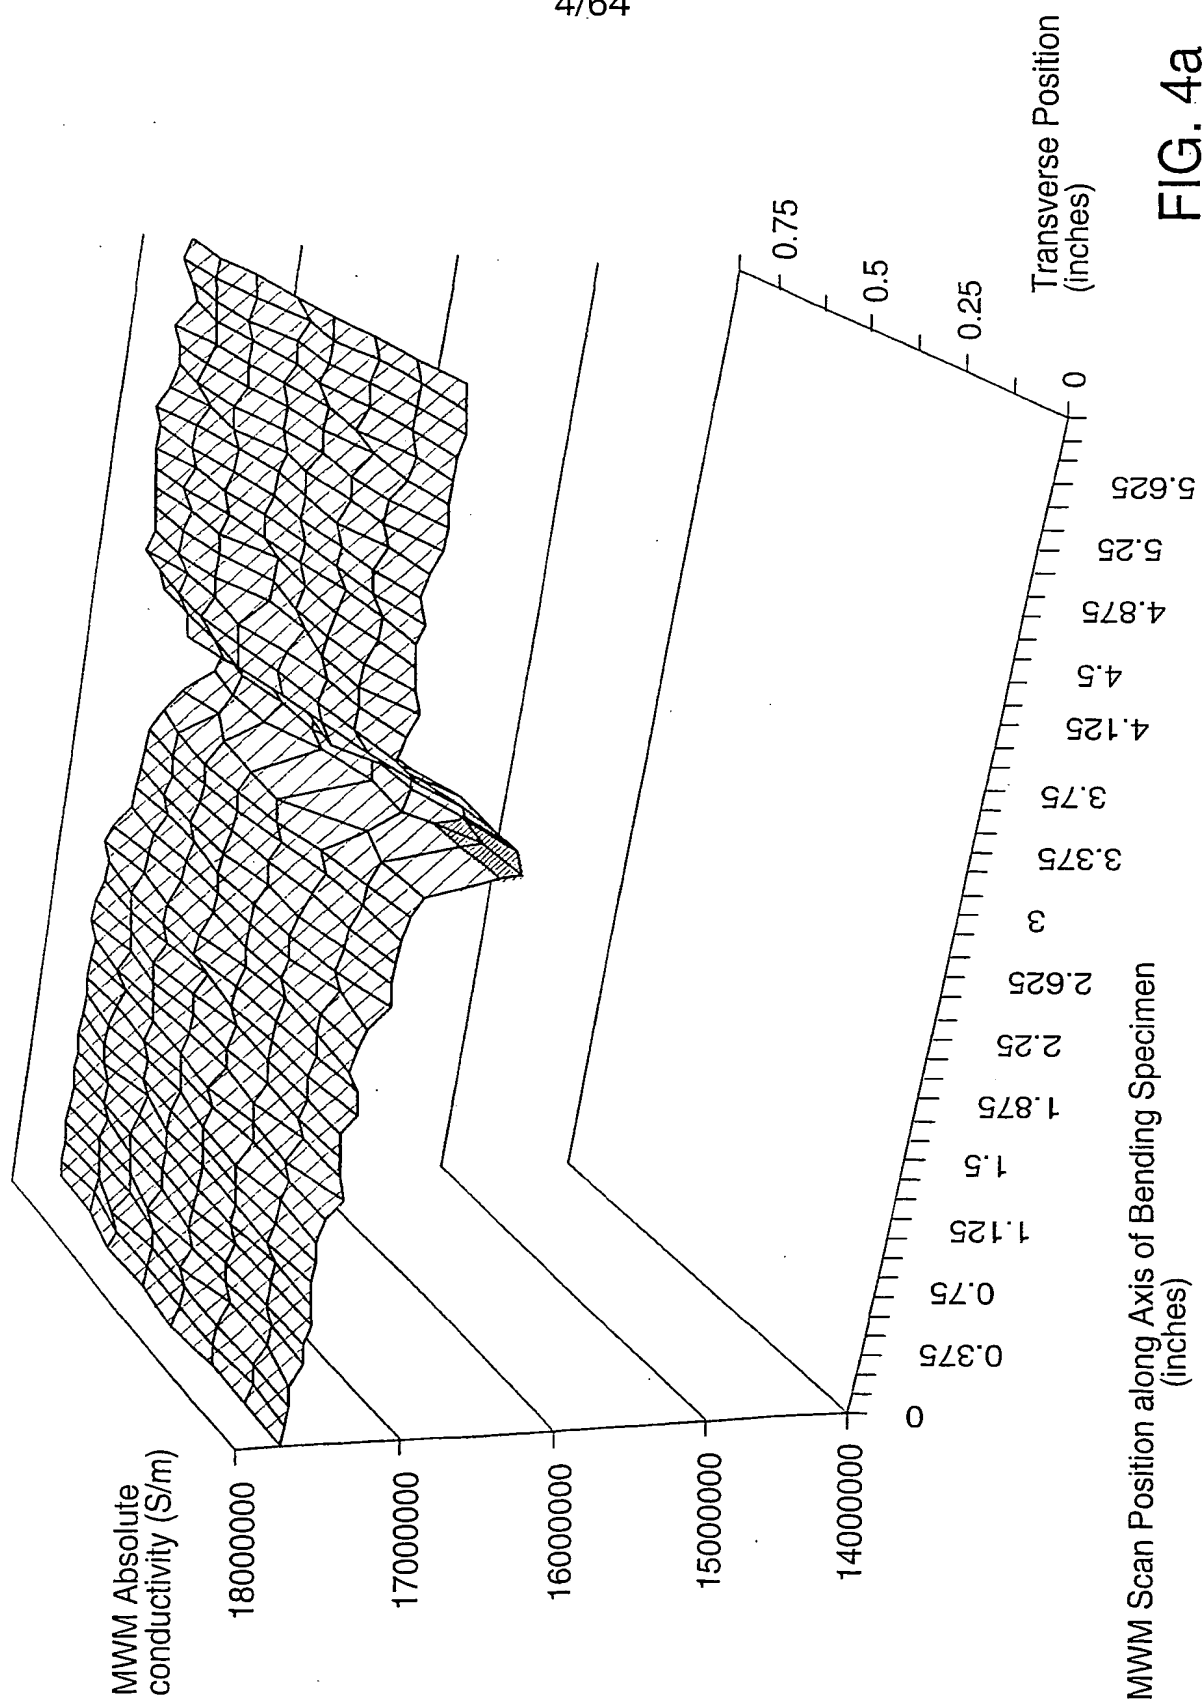


FIG. 4a

5/64

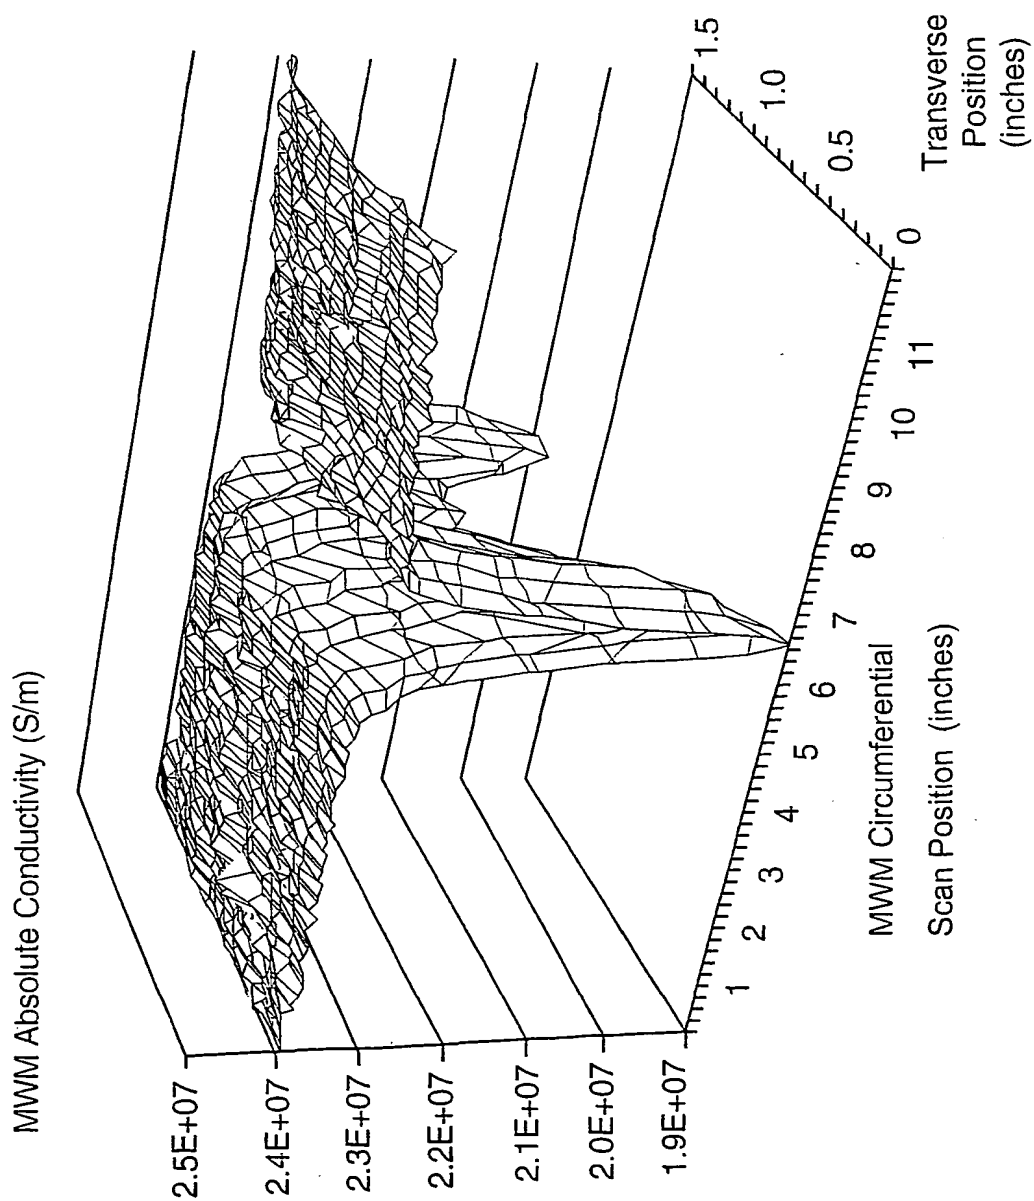


FIG. 5a

6/64

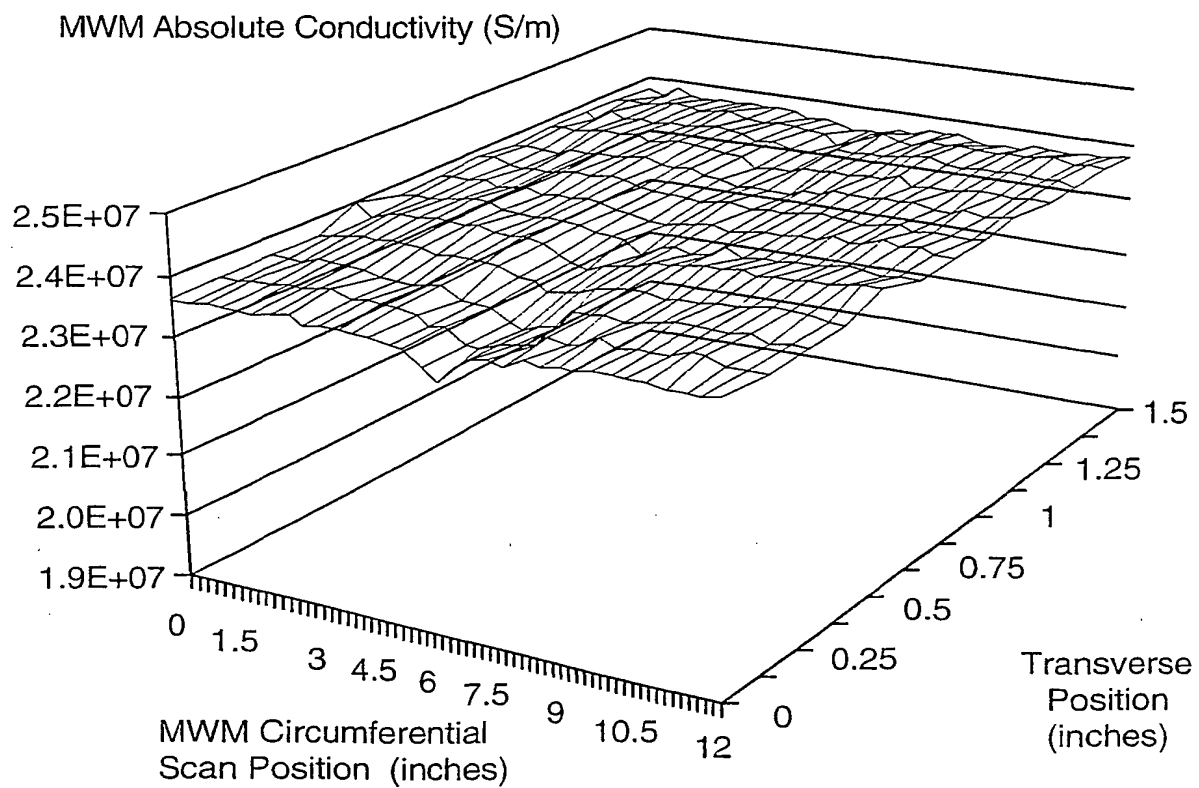


FIG. 5b

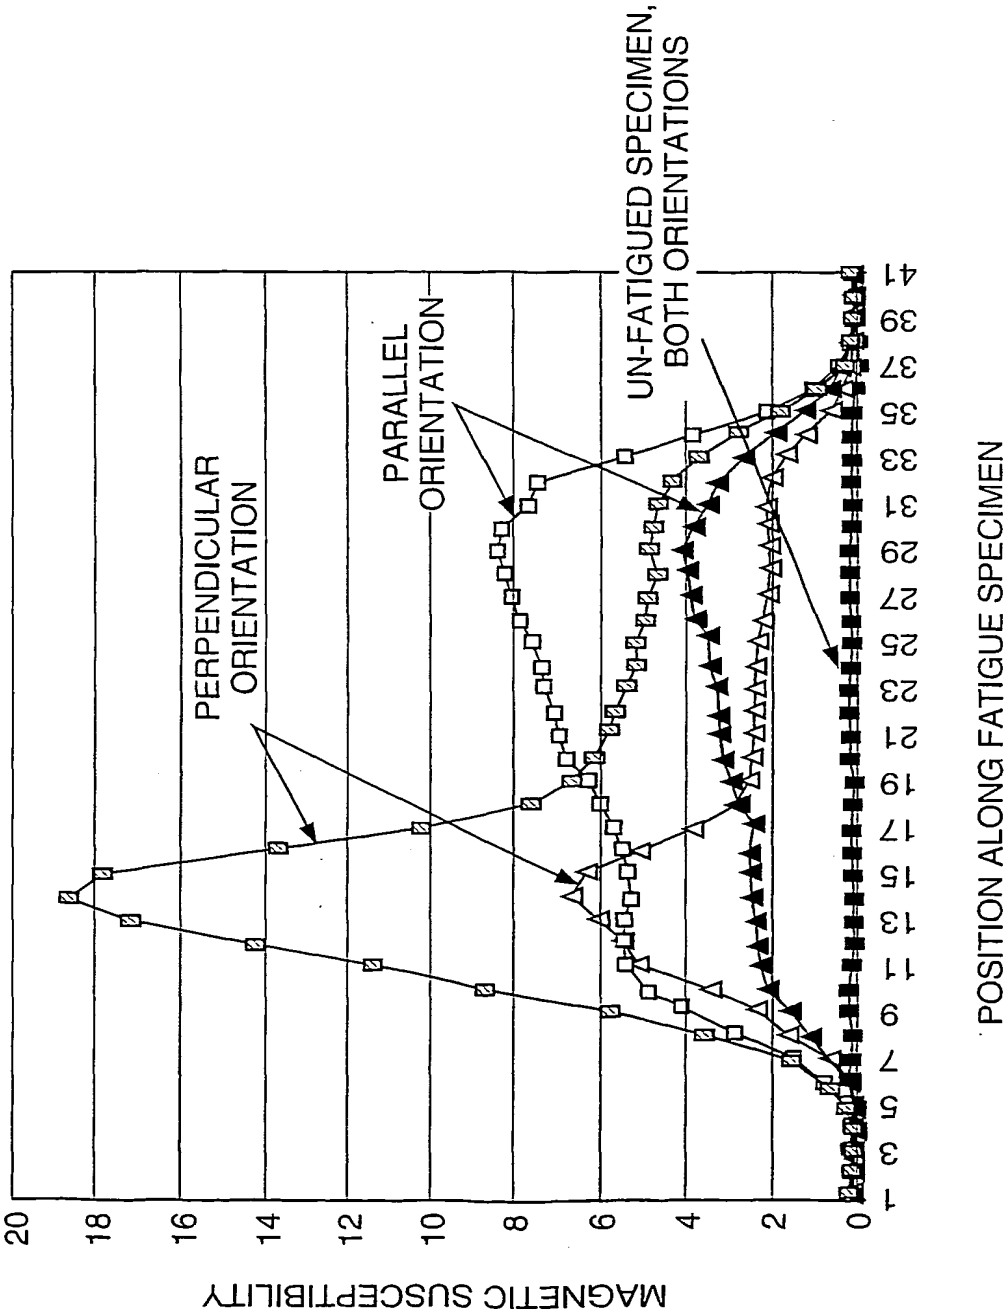


FIG. 6

8/64

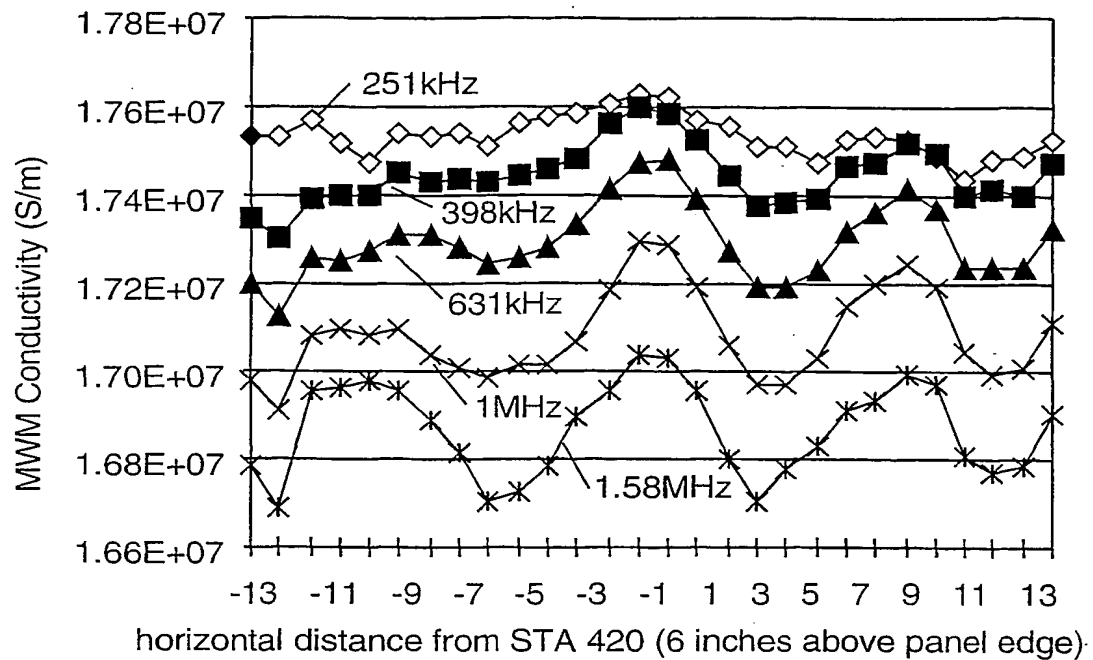


FIG. 7a

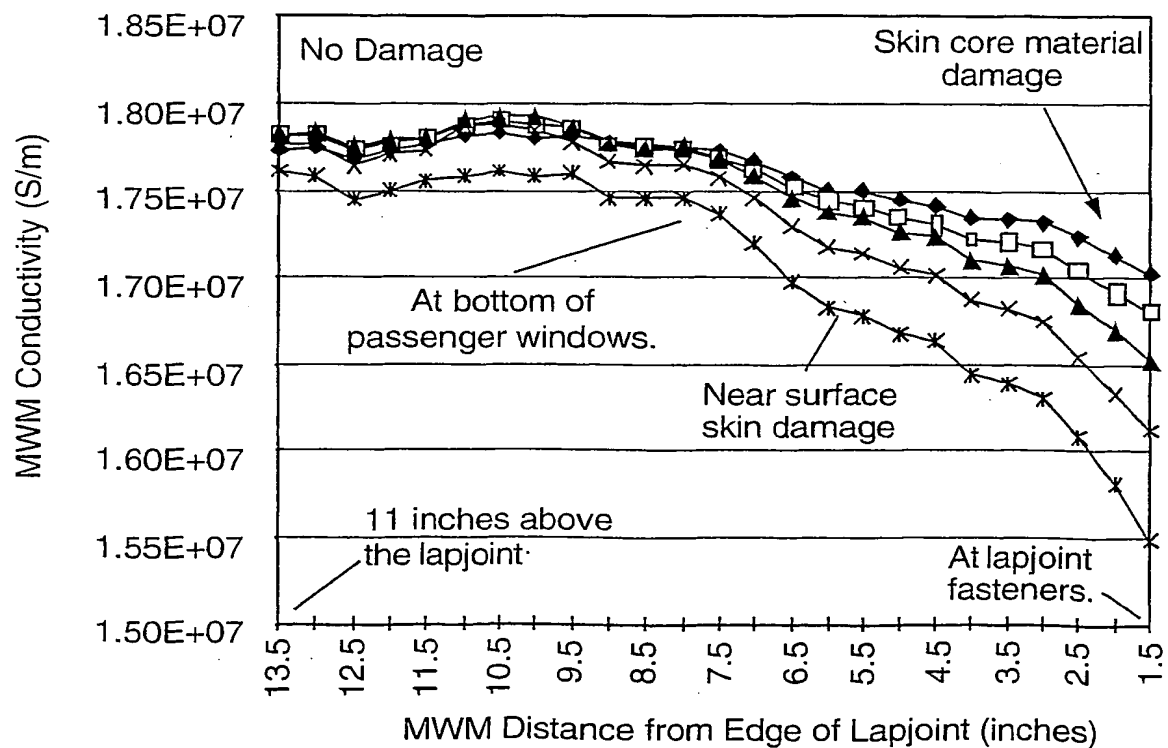


FIG. 7b

9/64

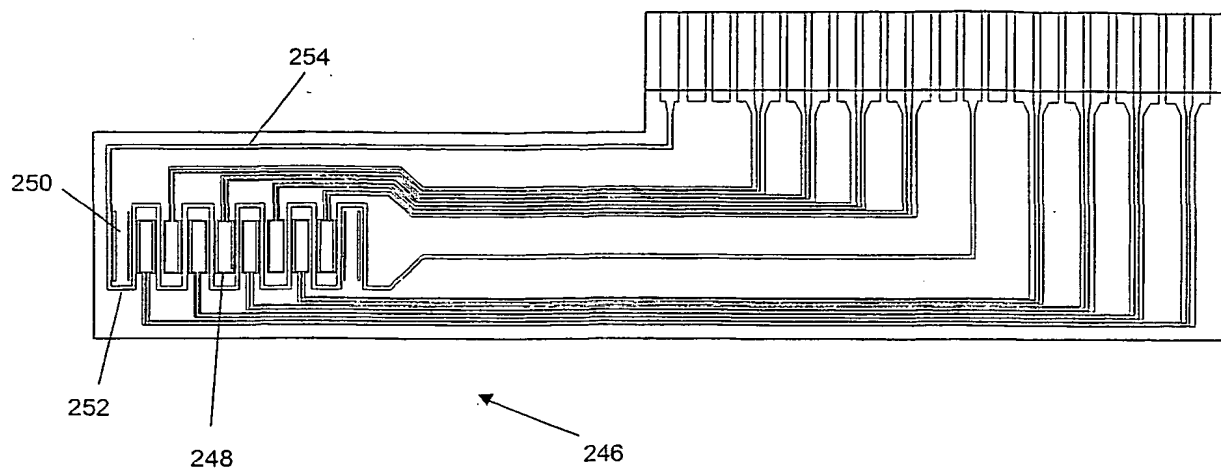


FIG. 8a

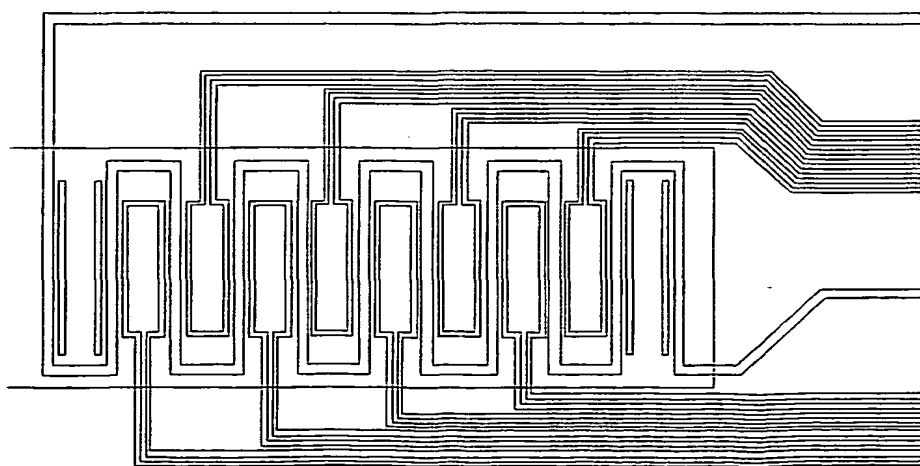


FIG. 8b

10/64

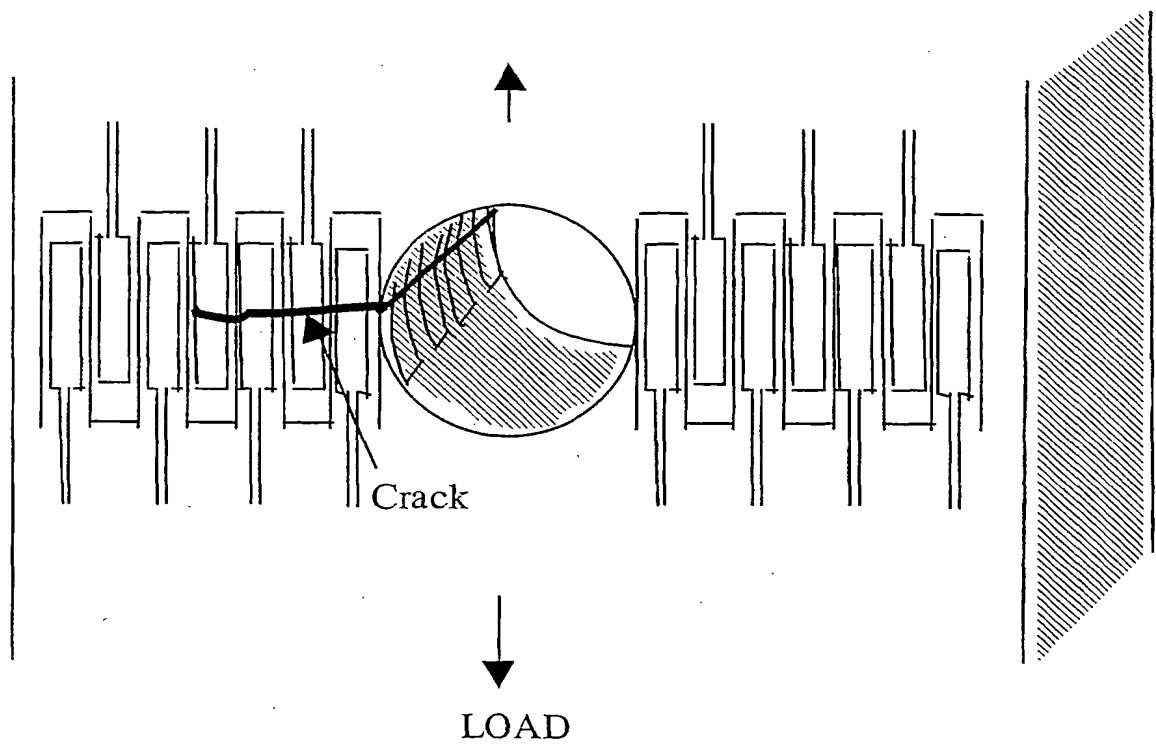


FIG. 9

11/64

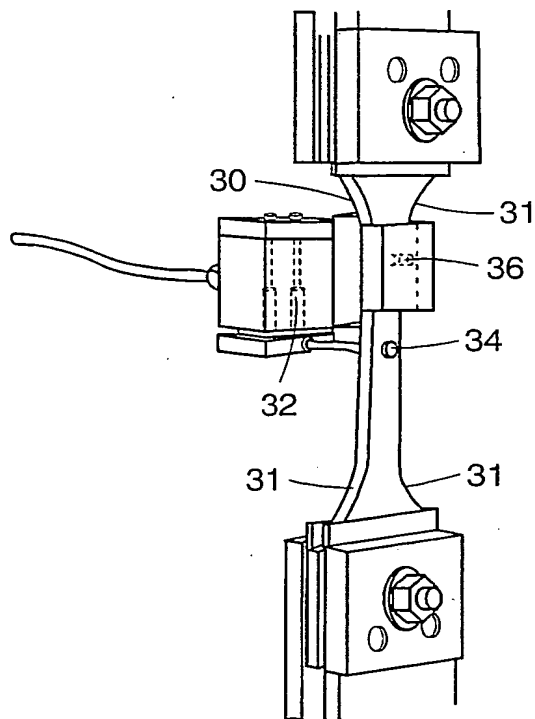


FIG. 10

12/64

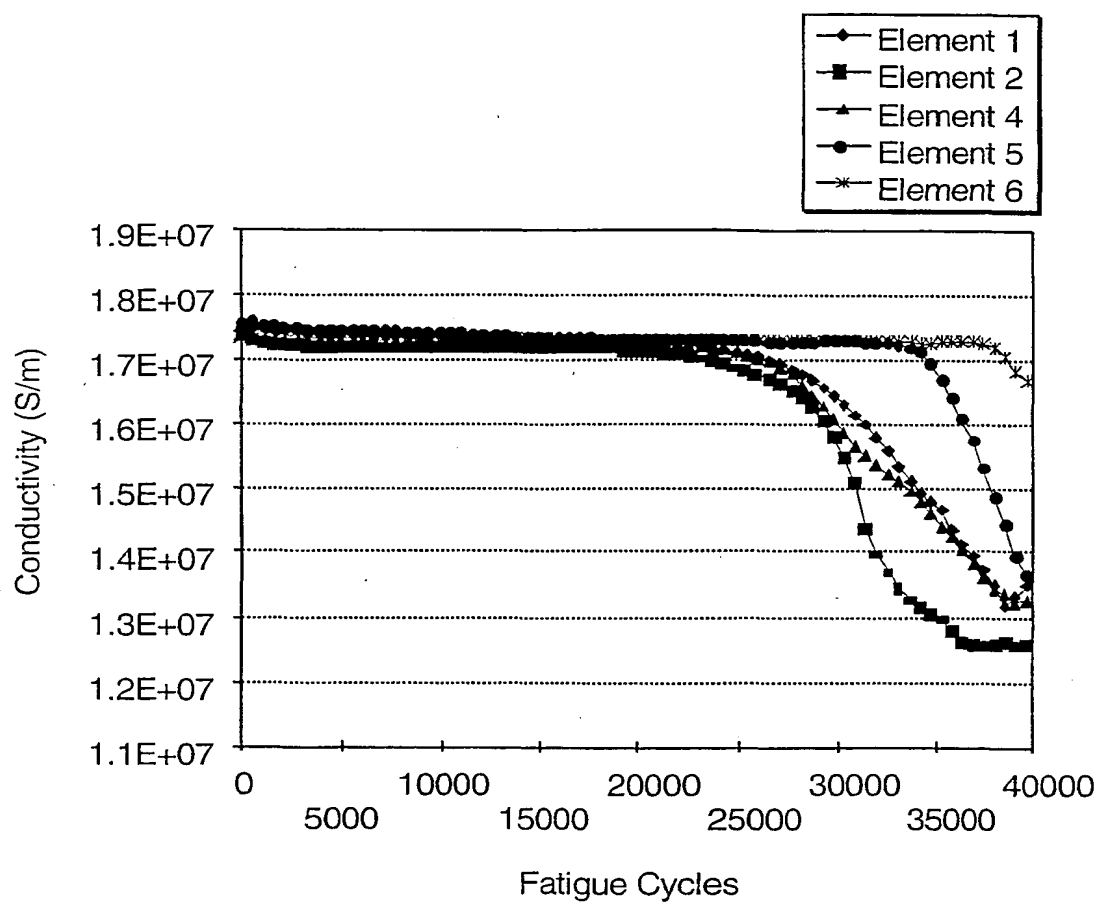


FIG. 11a

13/64

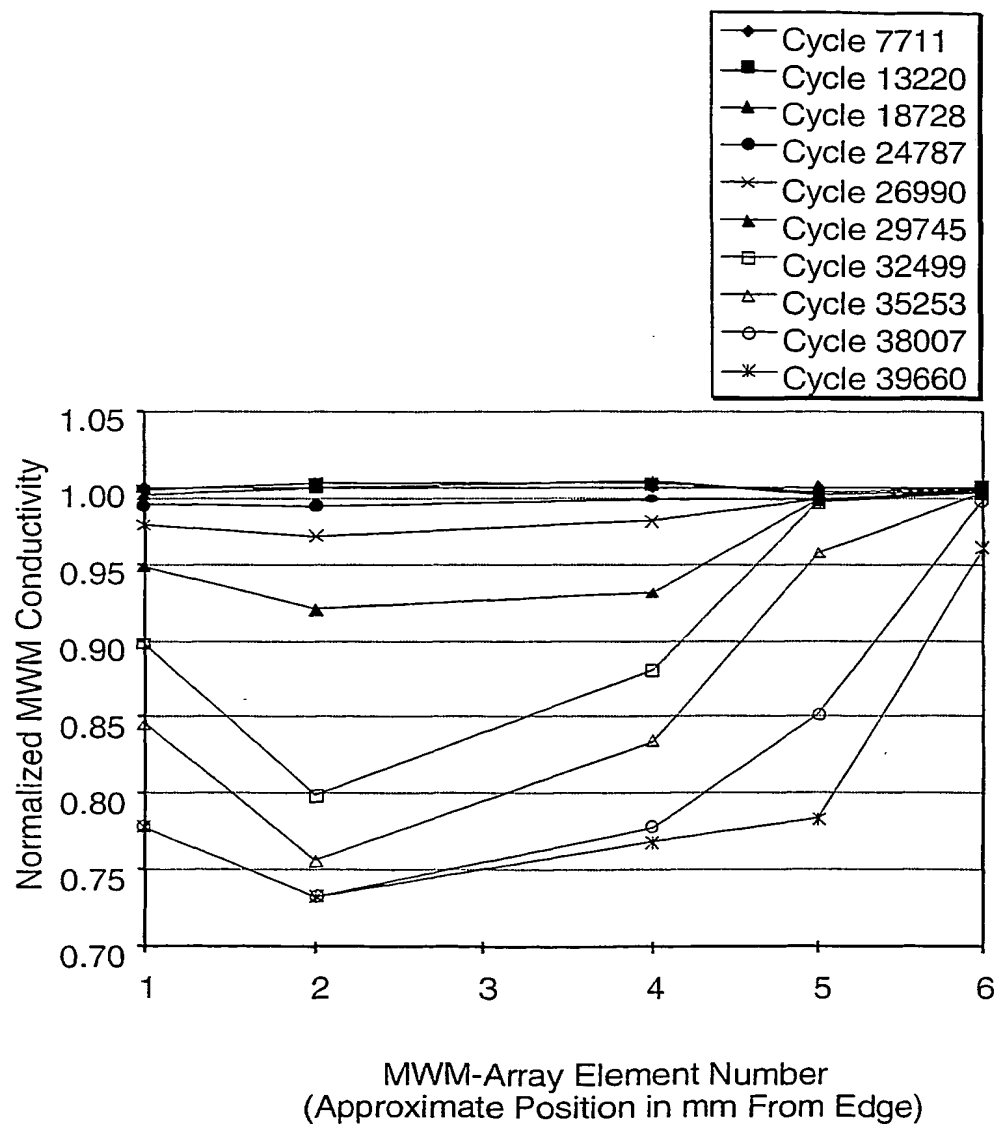


FIG. 11b

14/64

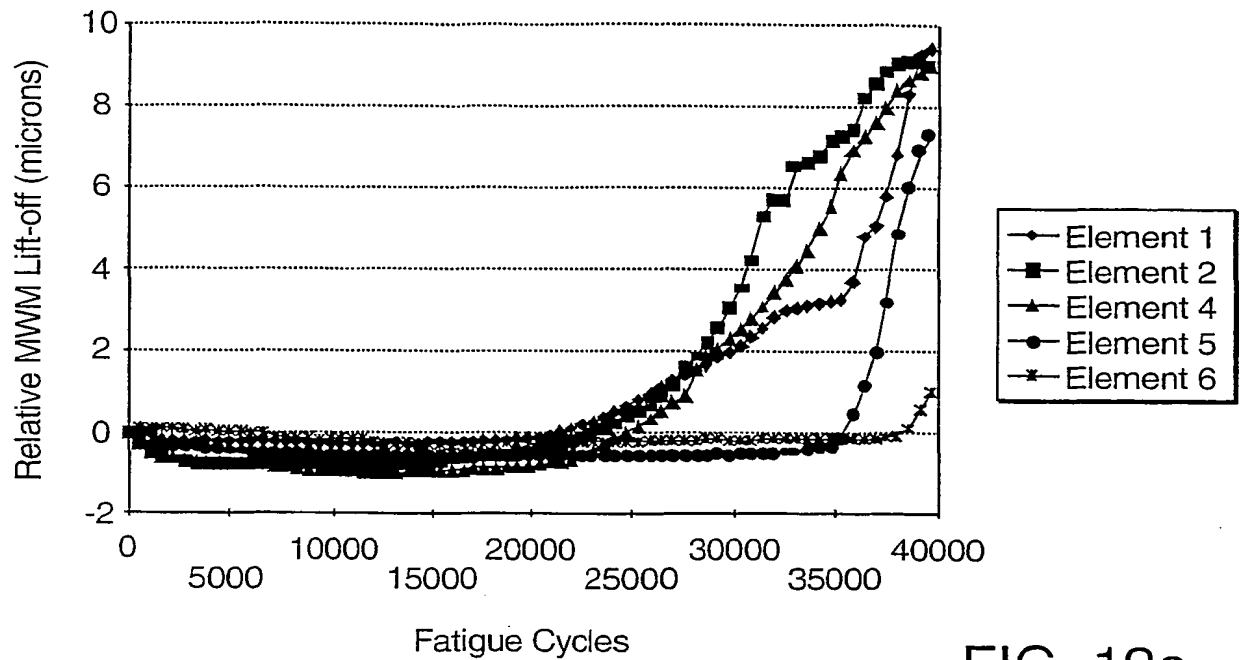


FIG. 12a

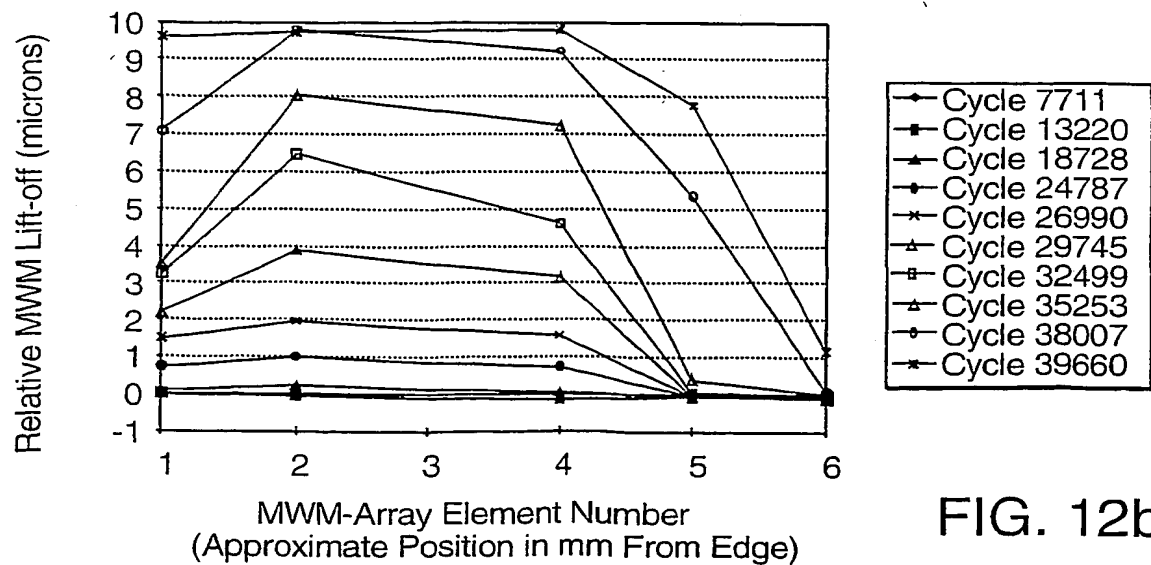


FIG. 12b

15/64

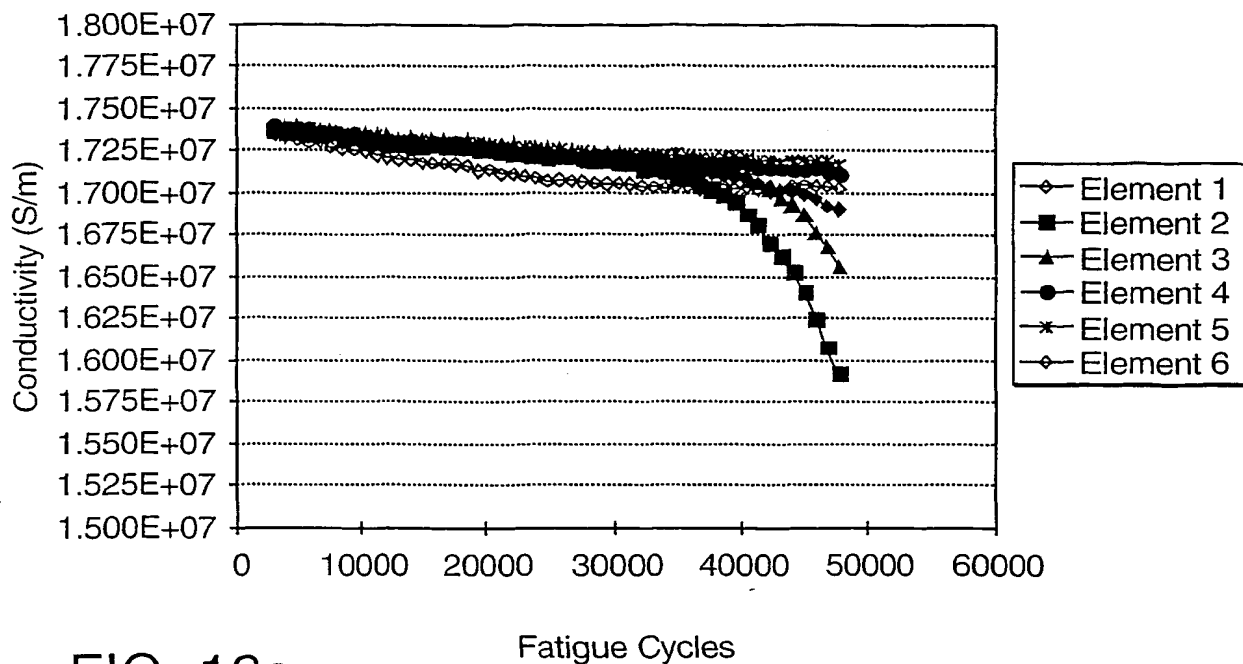


FIG. 13a

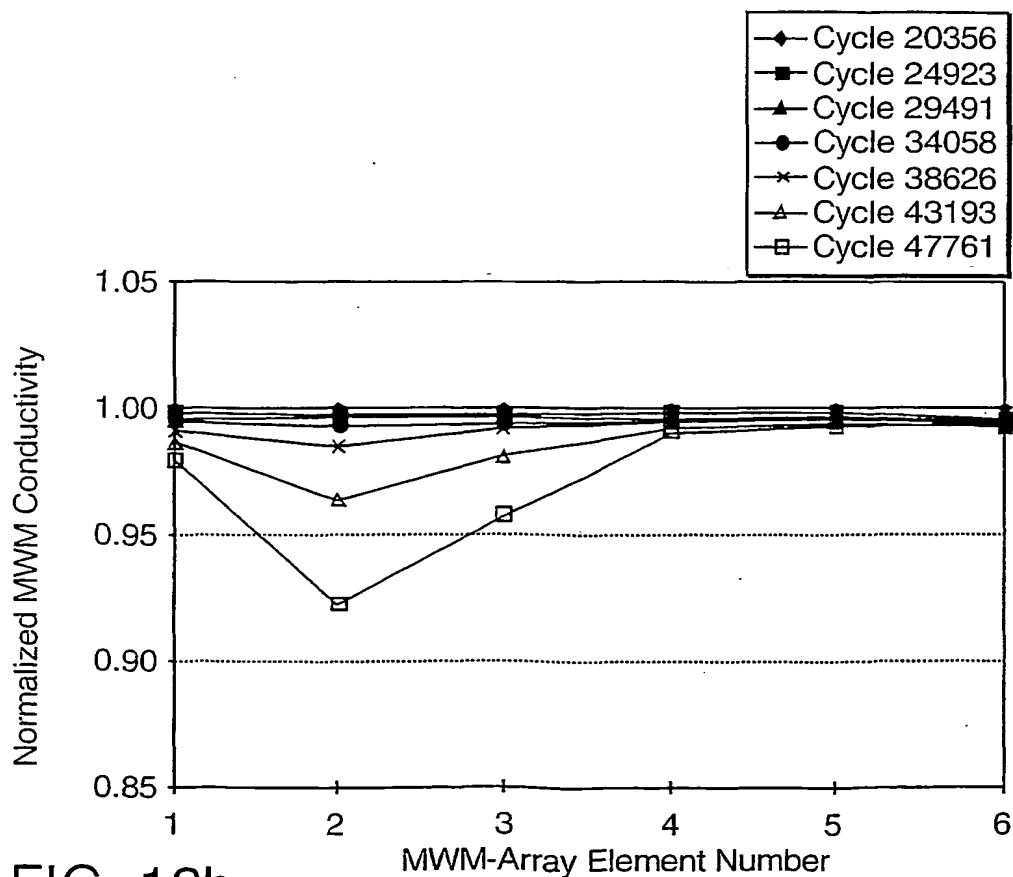


FIG. 13b

16/64

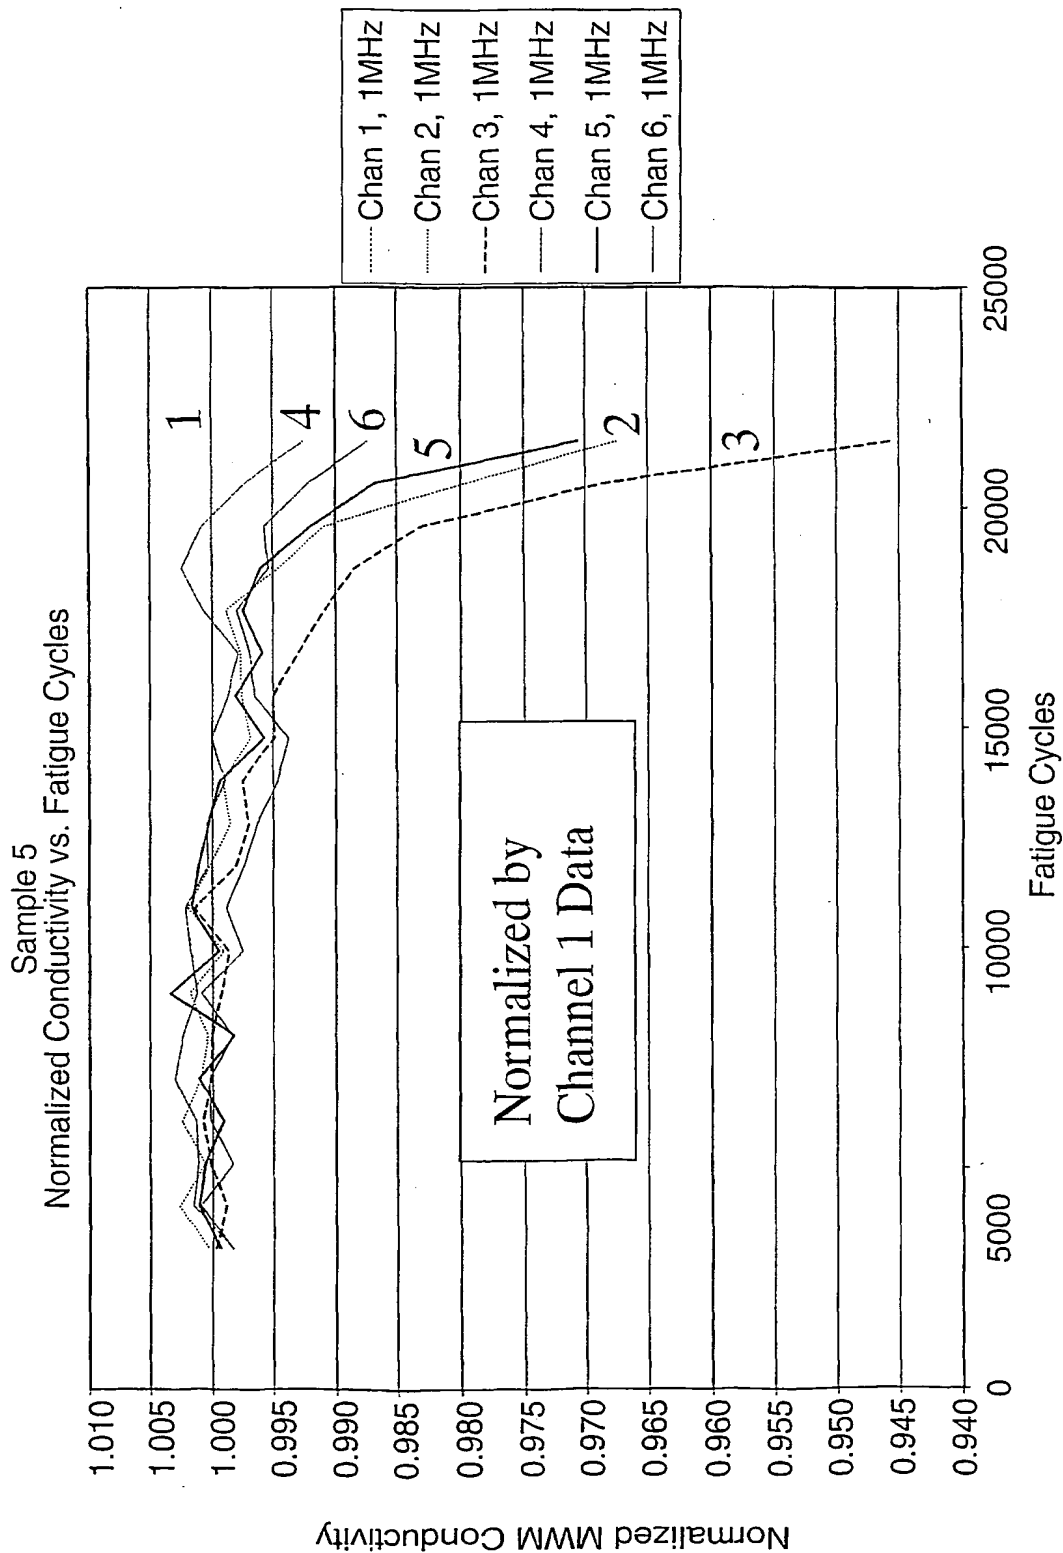


FIG. 14a

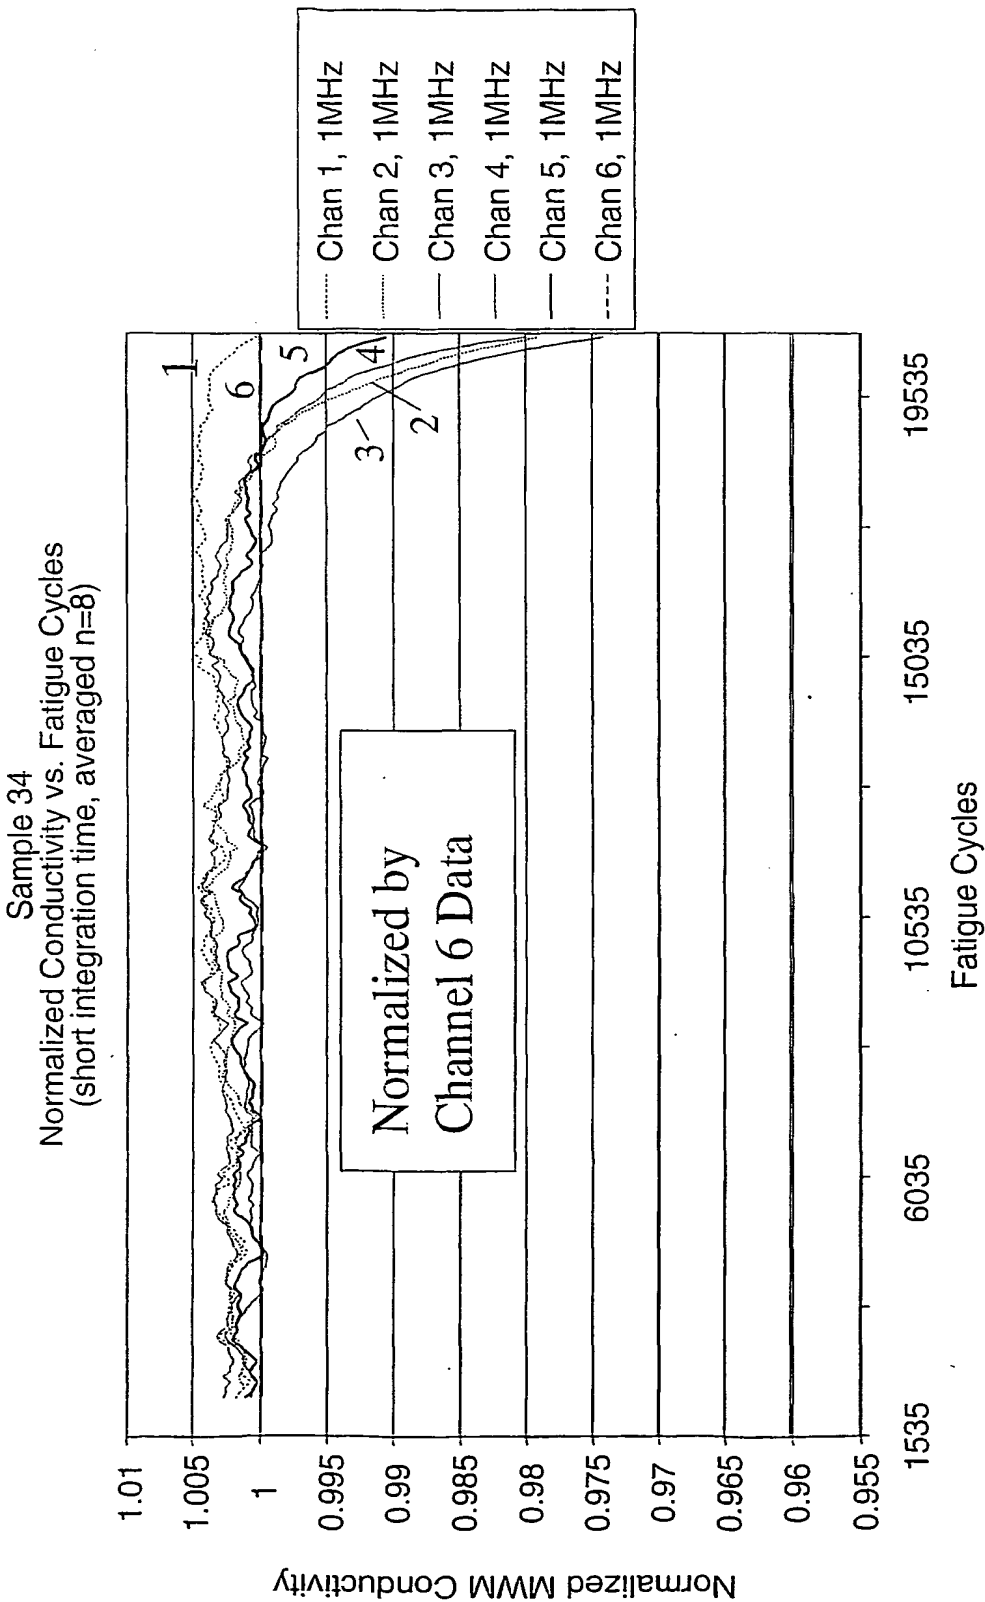


FIG. 14b

18/64

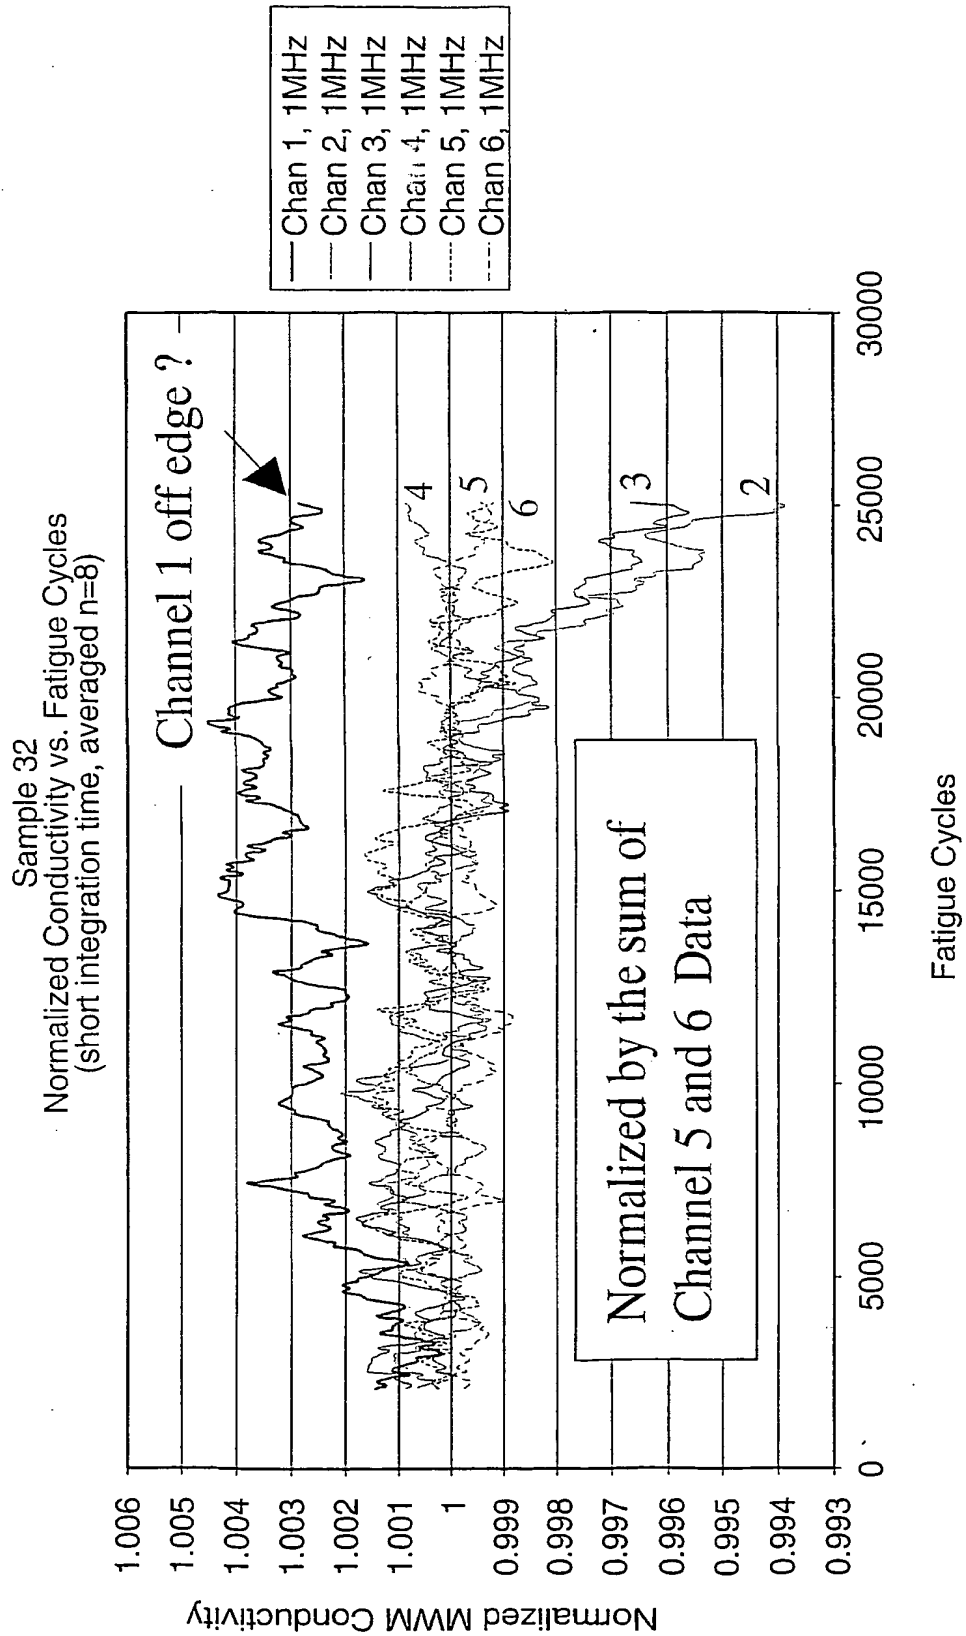


FIG. 14c

19/64

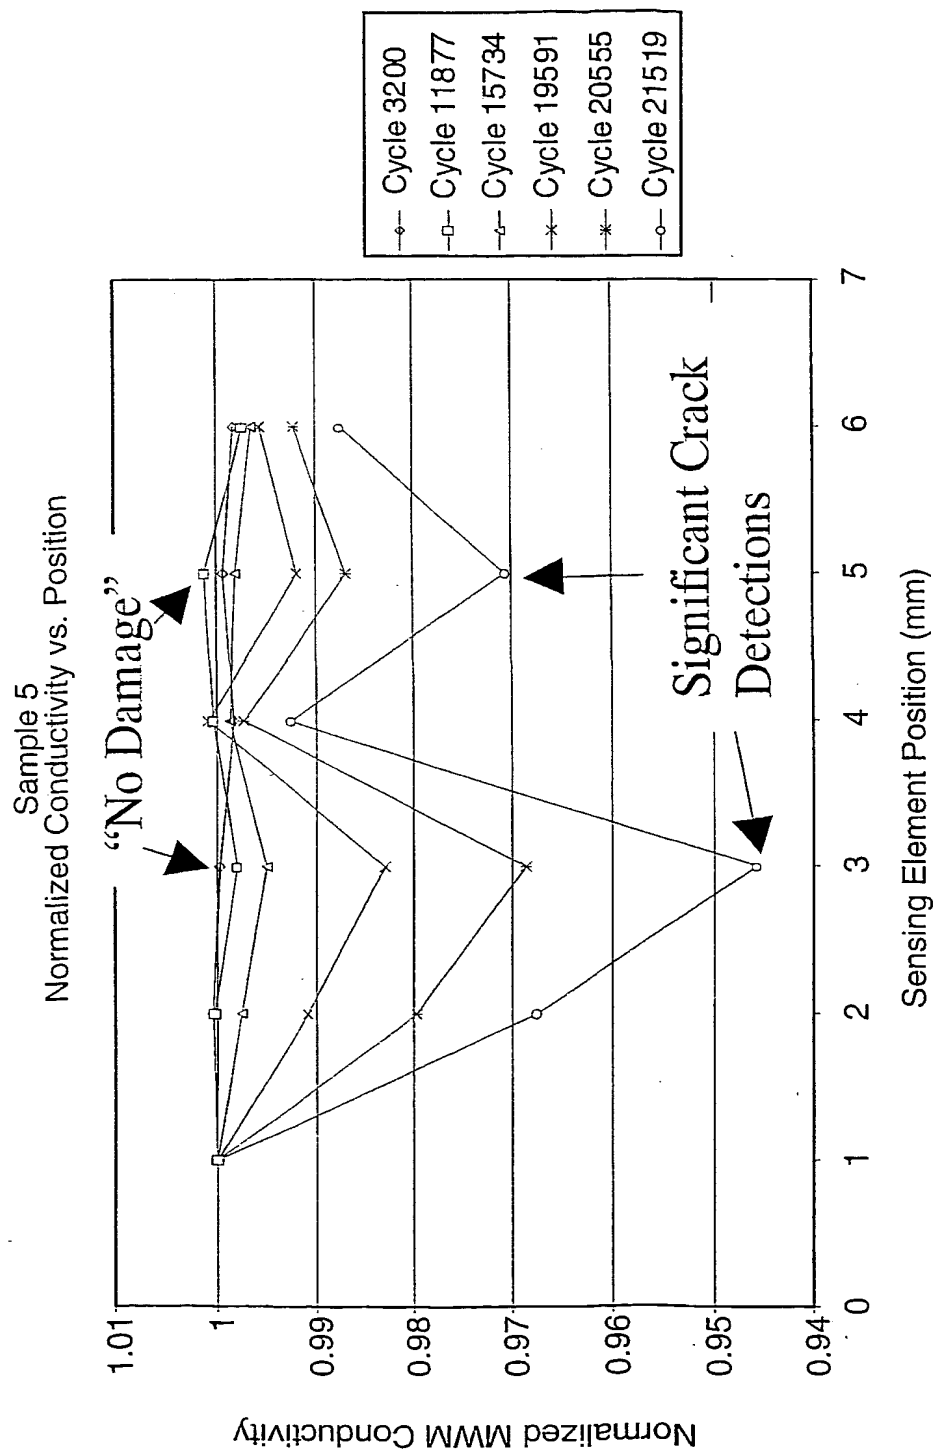


FIG. 15a

20/64

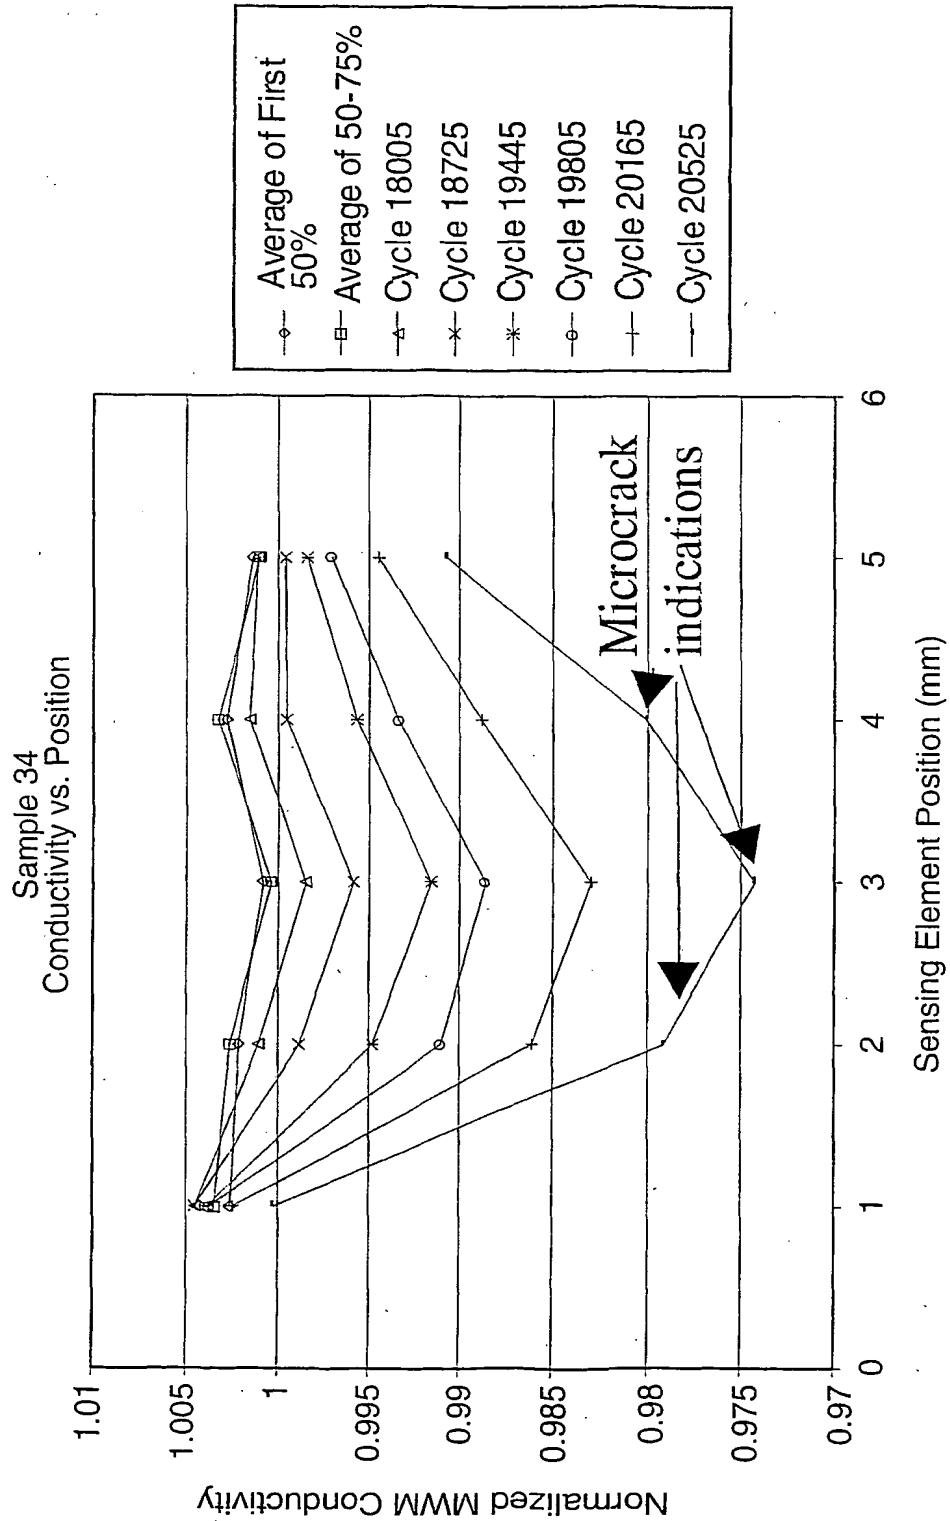


FIG. 15b

21/64

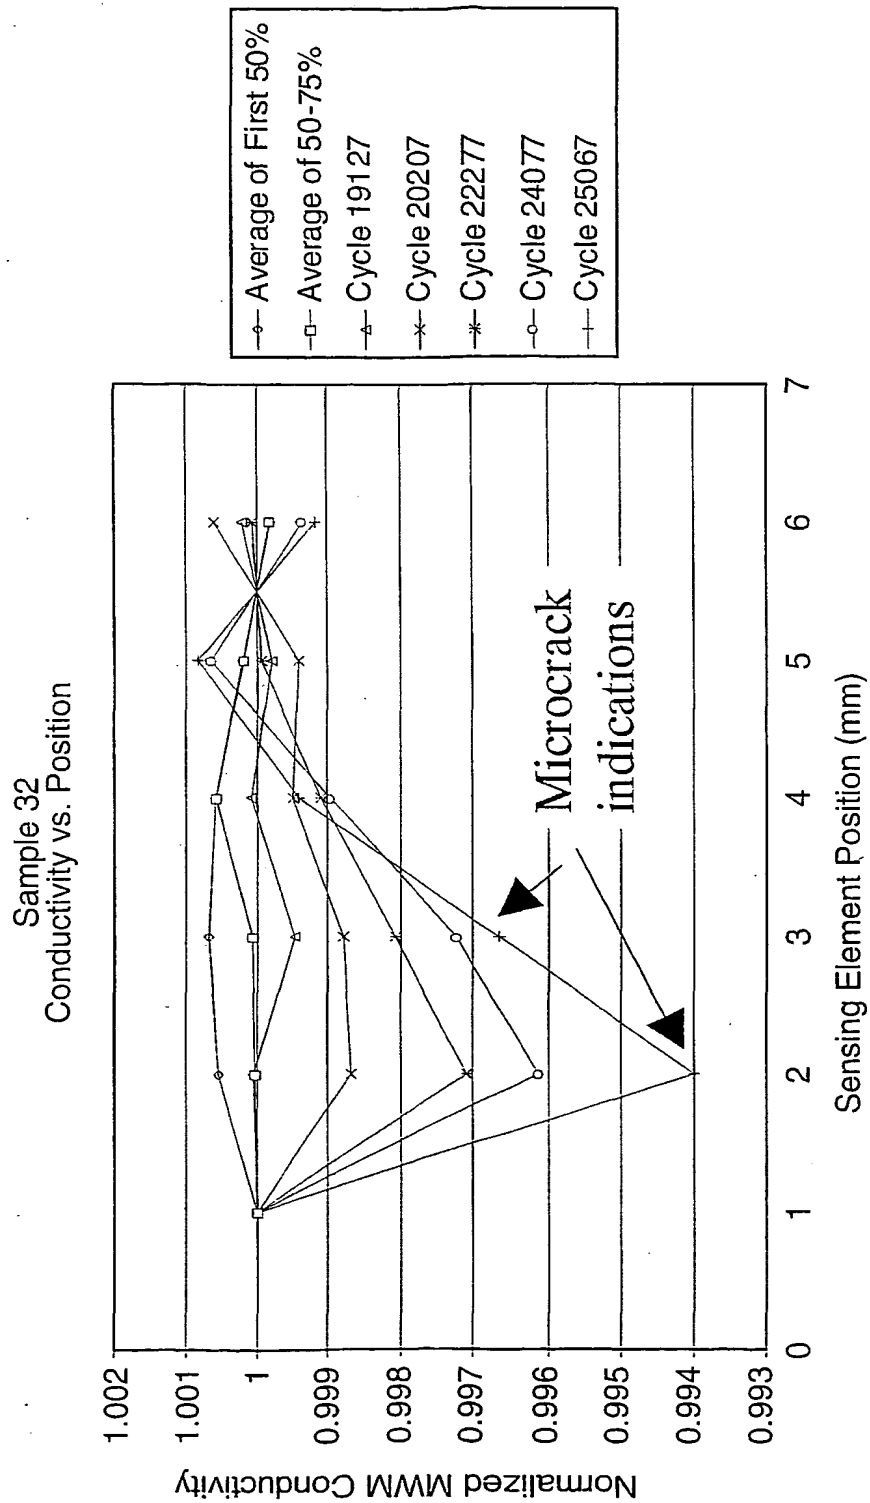


FIG. 15c

22/64

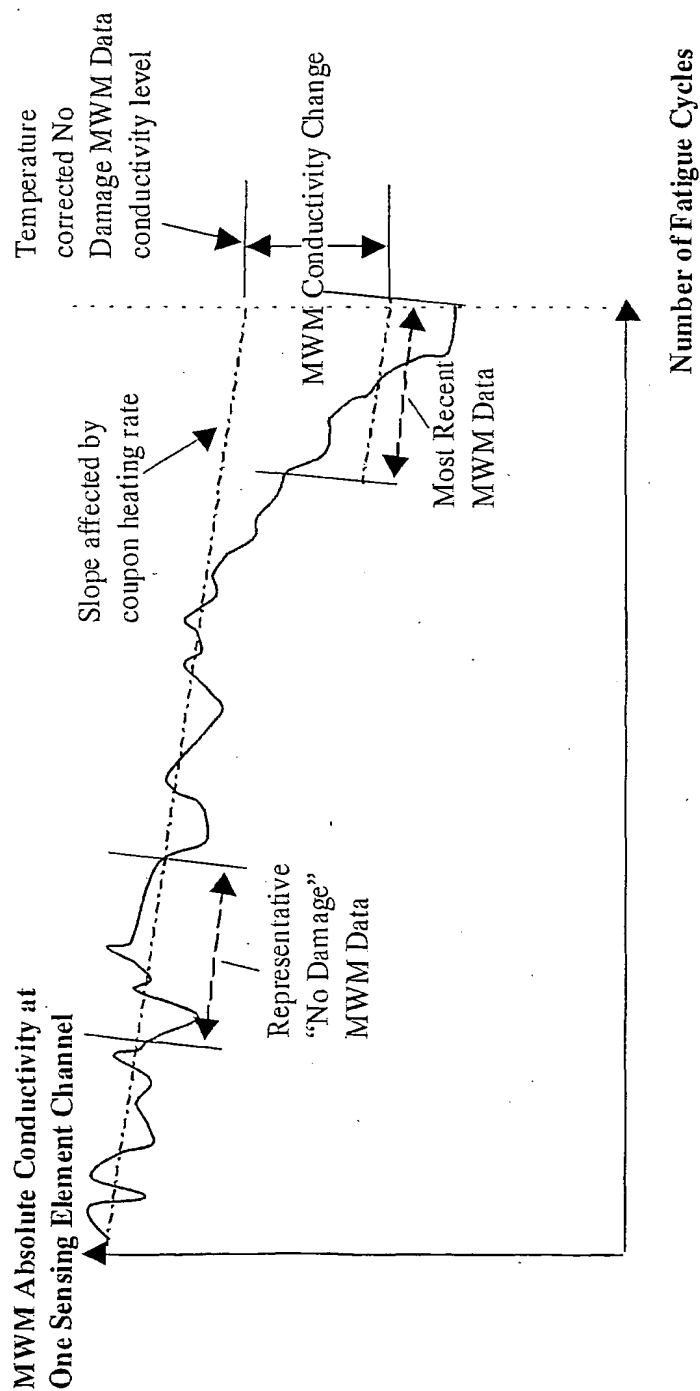


FIG. 16

23/64

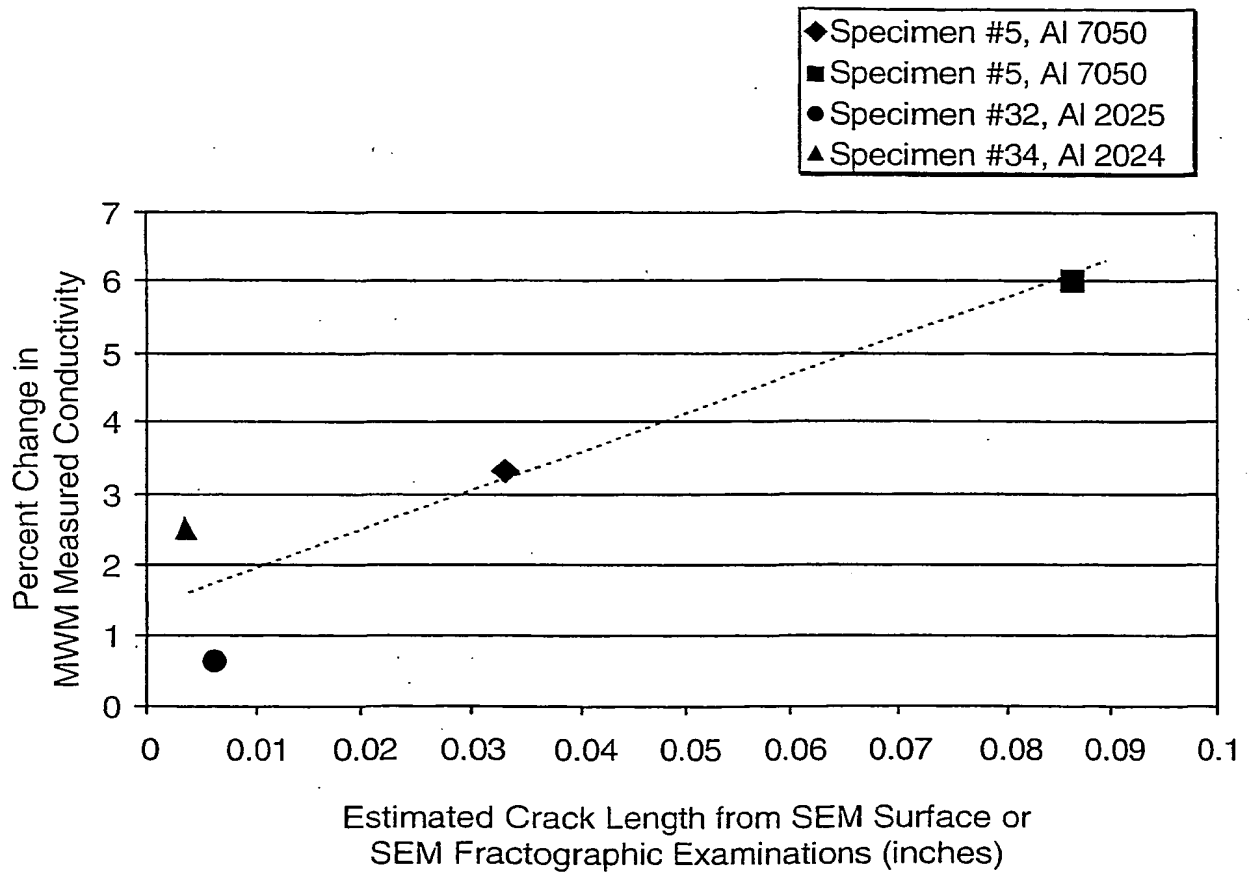


FIG. 17

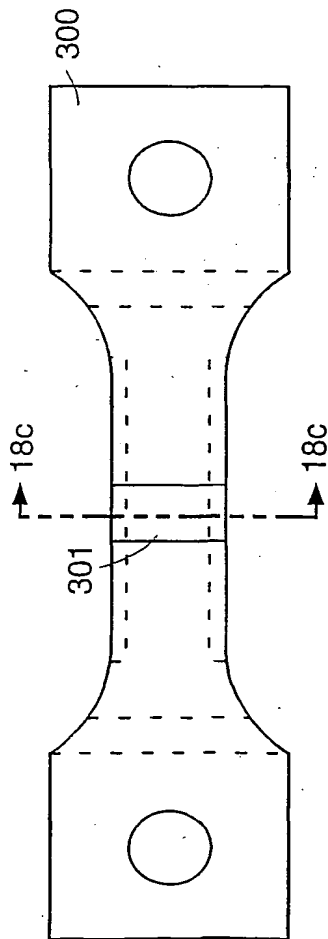


FIG. 18a




FIG. 18c

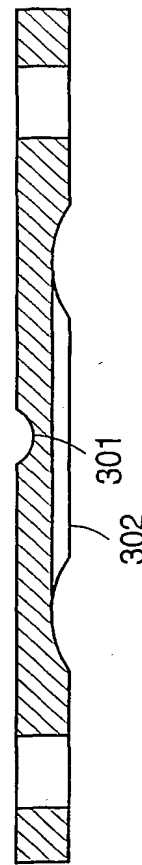
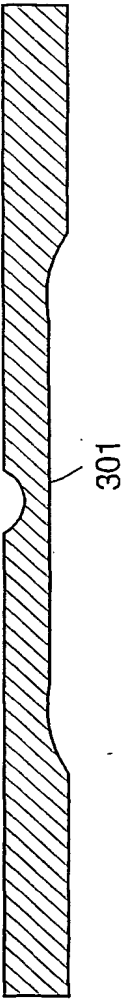
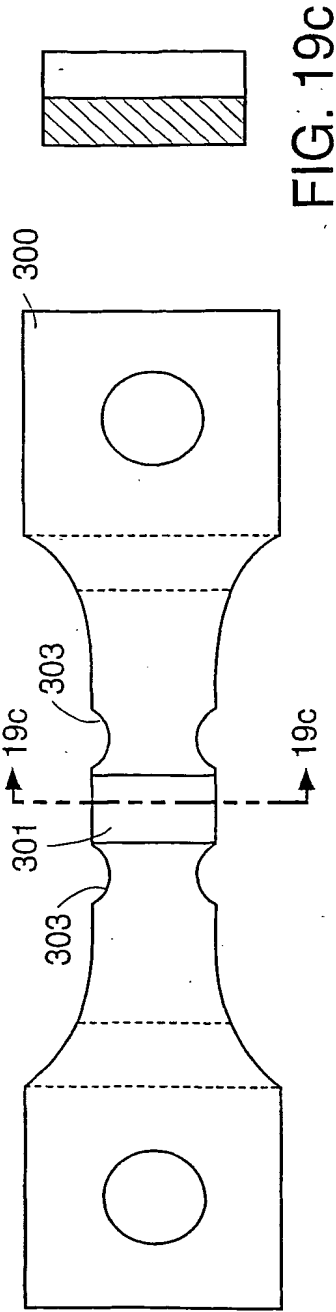


FIG. 18b



26/64

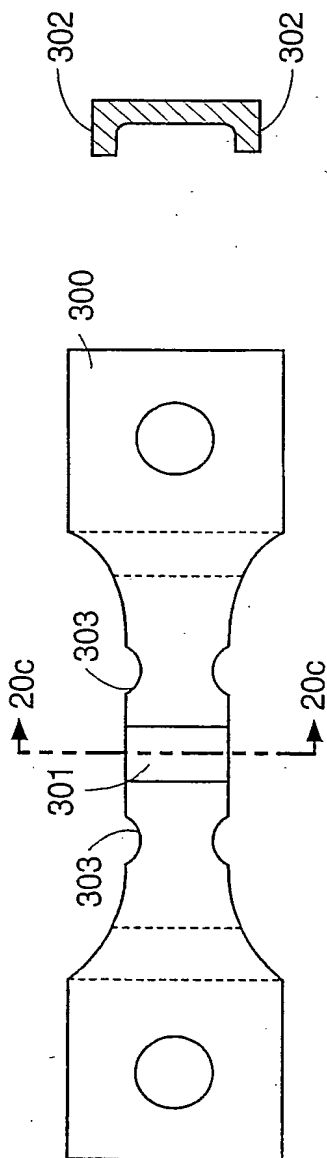


FIG. 20c

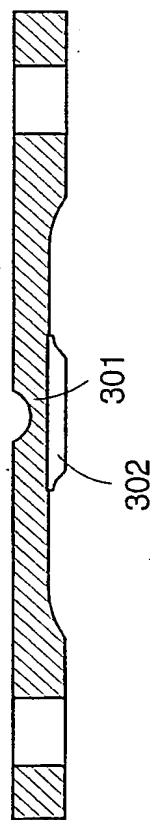



FIG. 20b

27/64

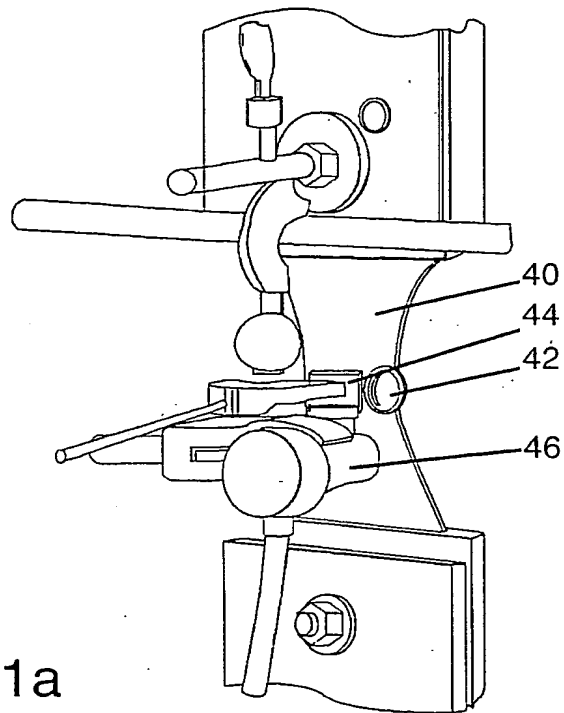


FIG. 21a

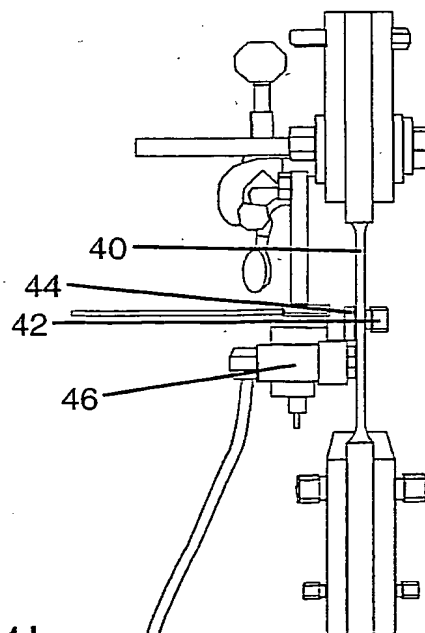


FIG. 21b

28/64

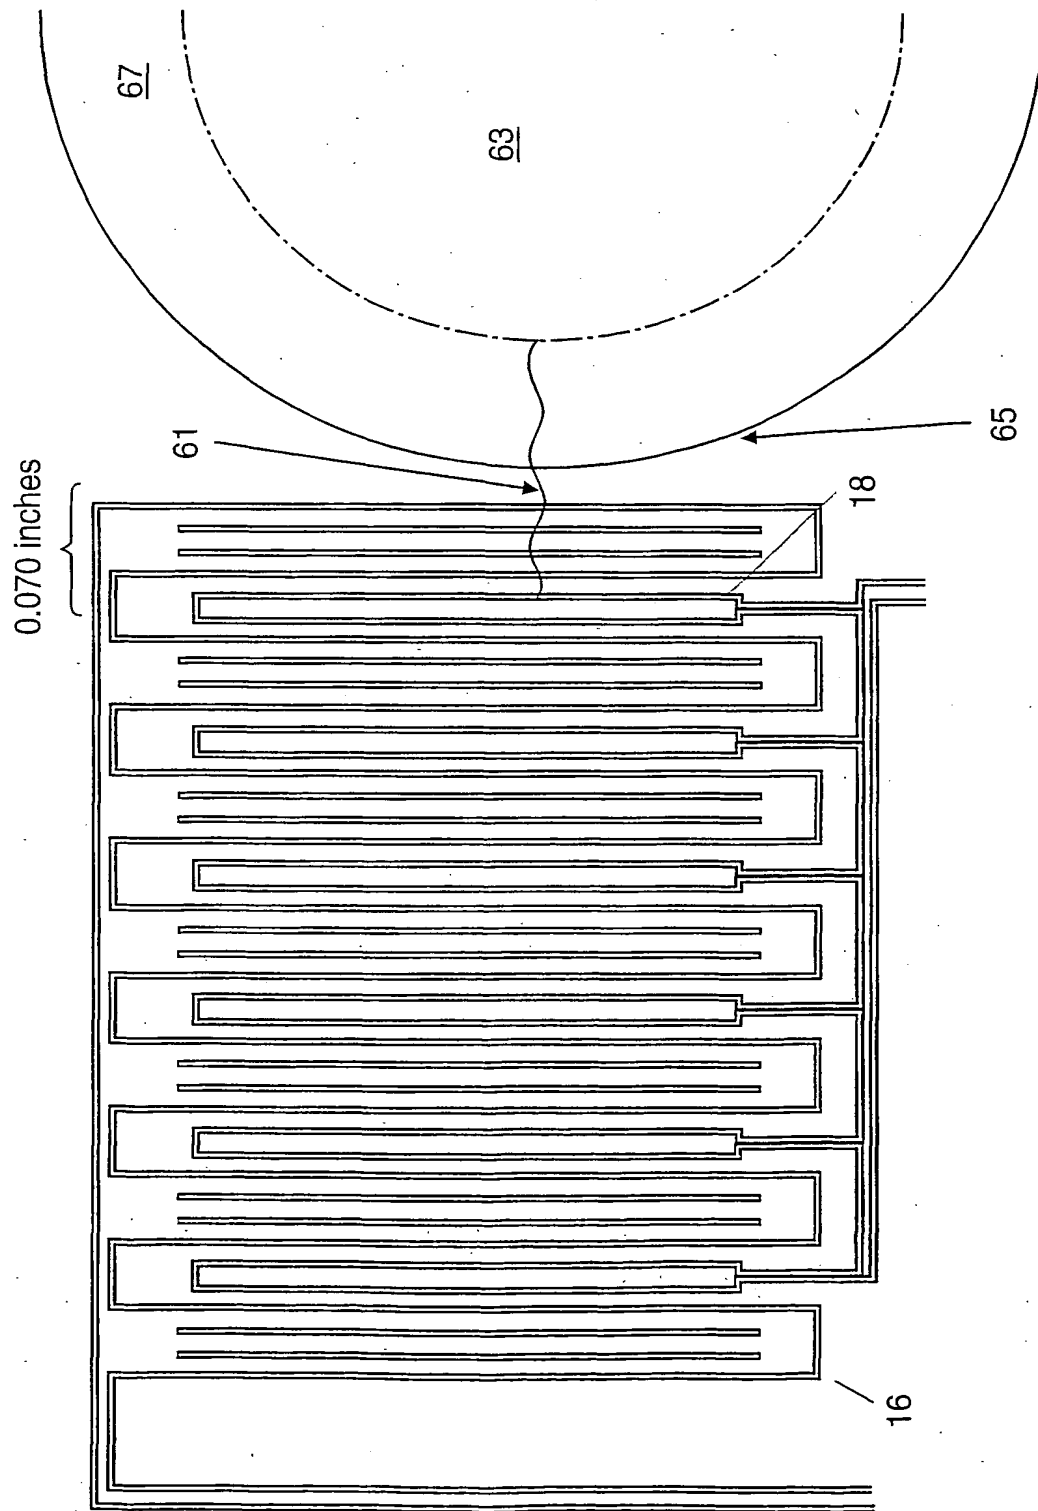


FIG. 22

29/64

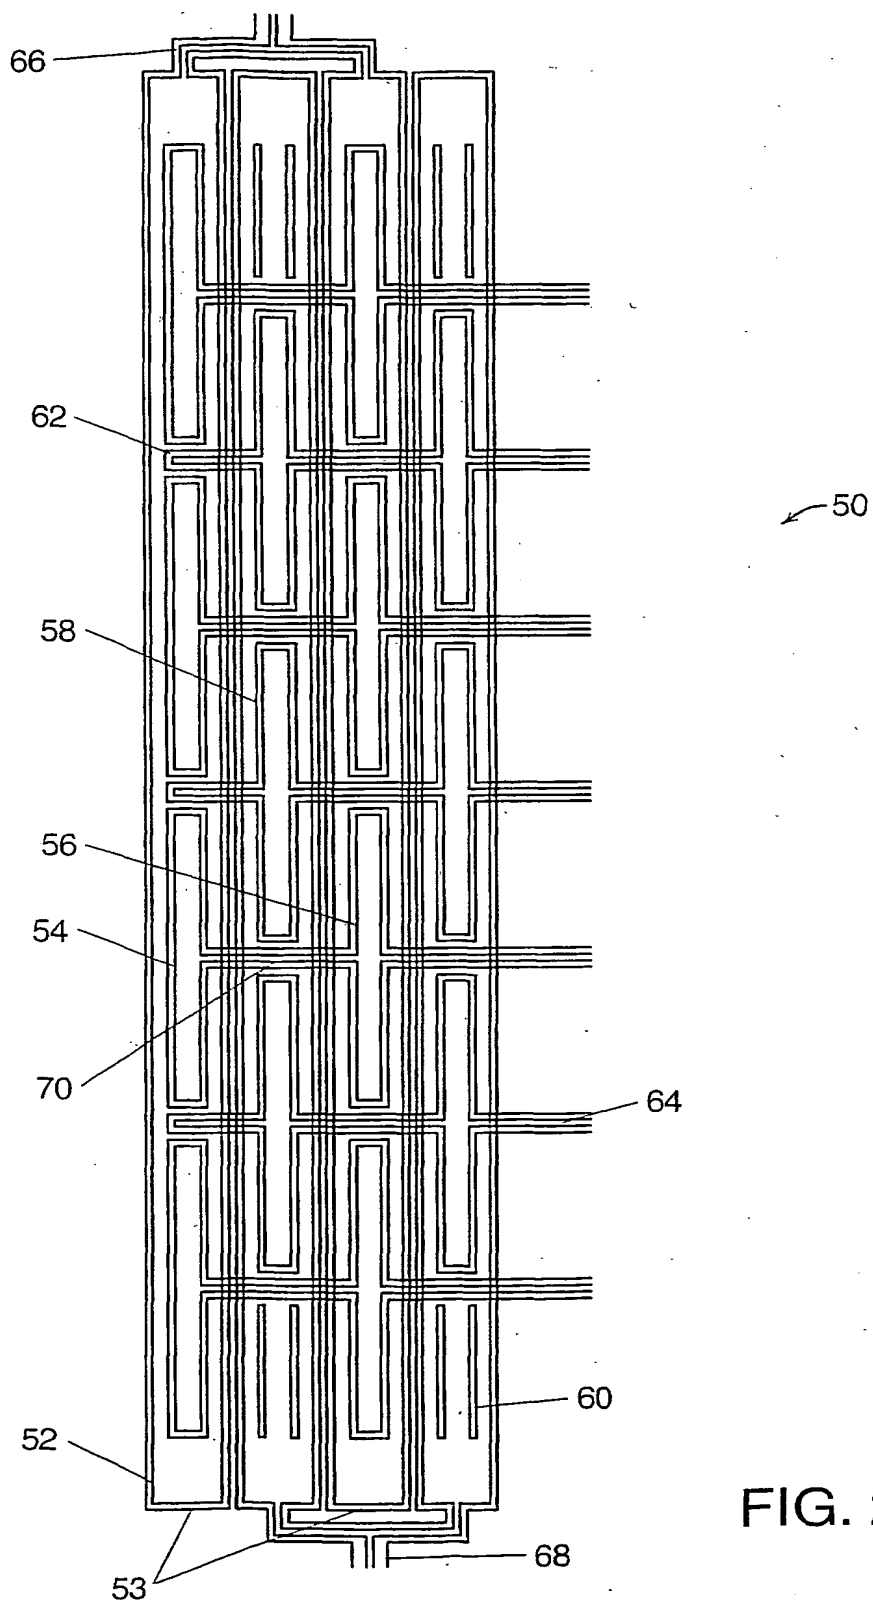


FIG. 23a

30/64

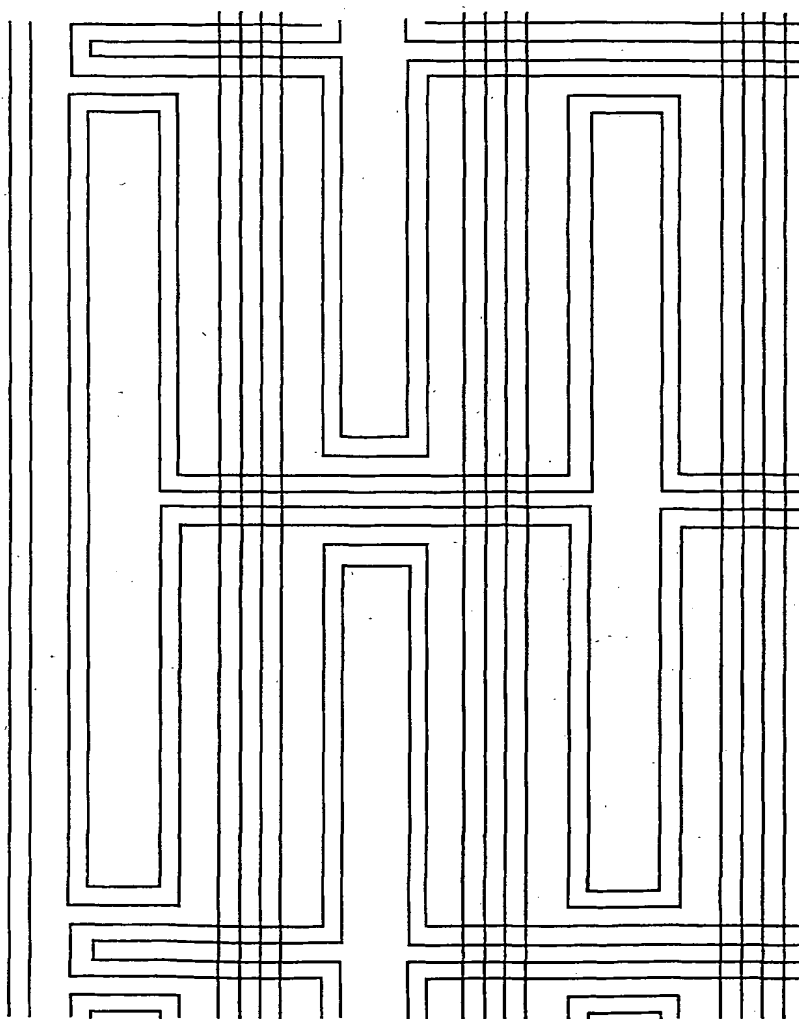


FIG. 23b

31/64

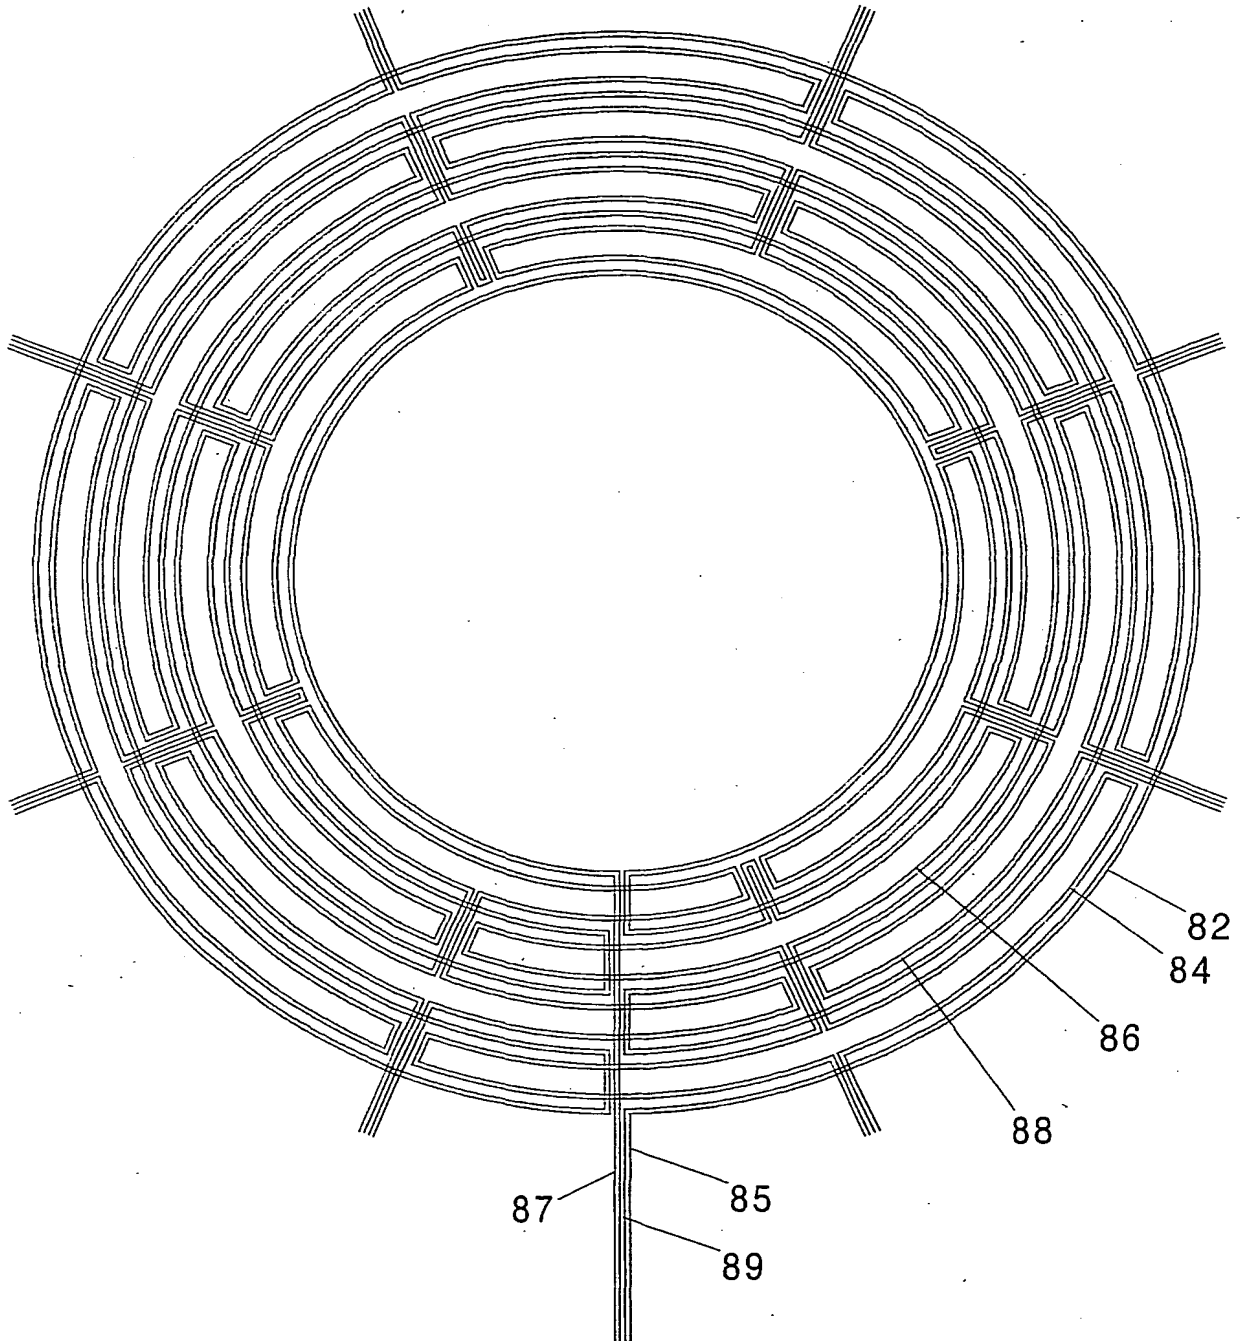


FIG. 24a

32/64

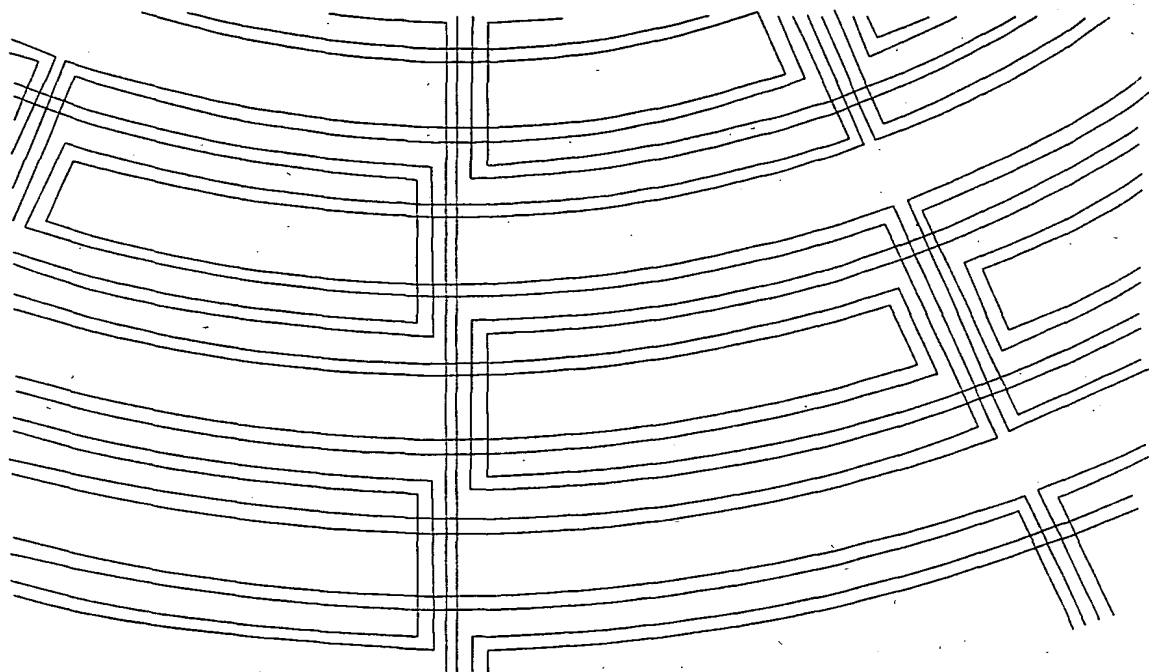


FIG. 24b

33/64

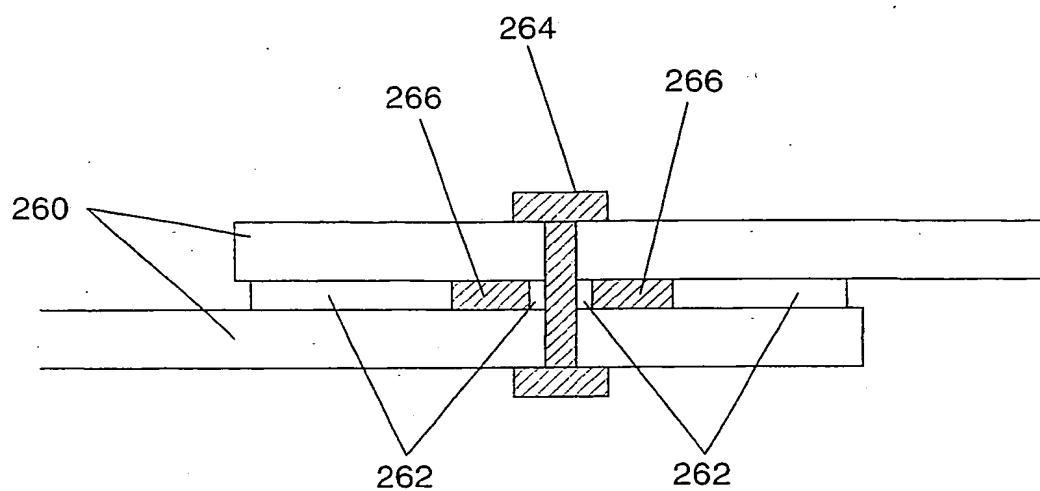


FIG. 25

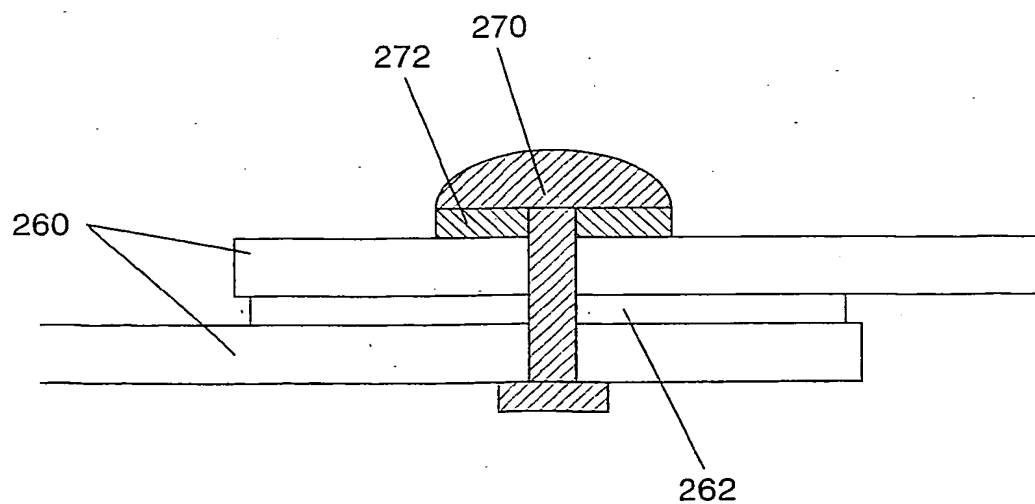


FIG. 26

34/64

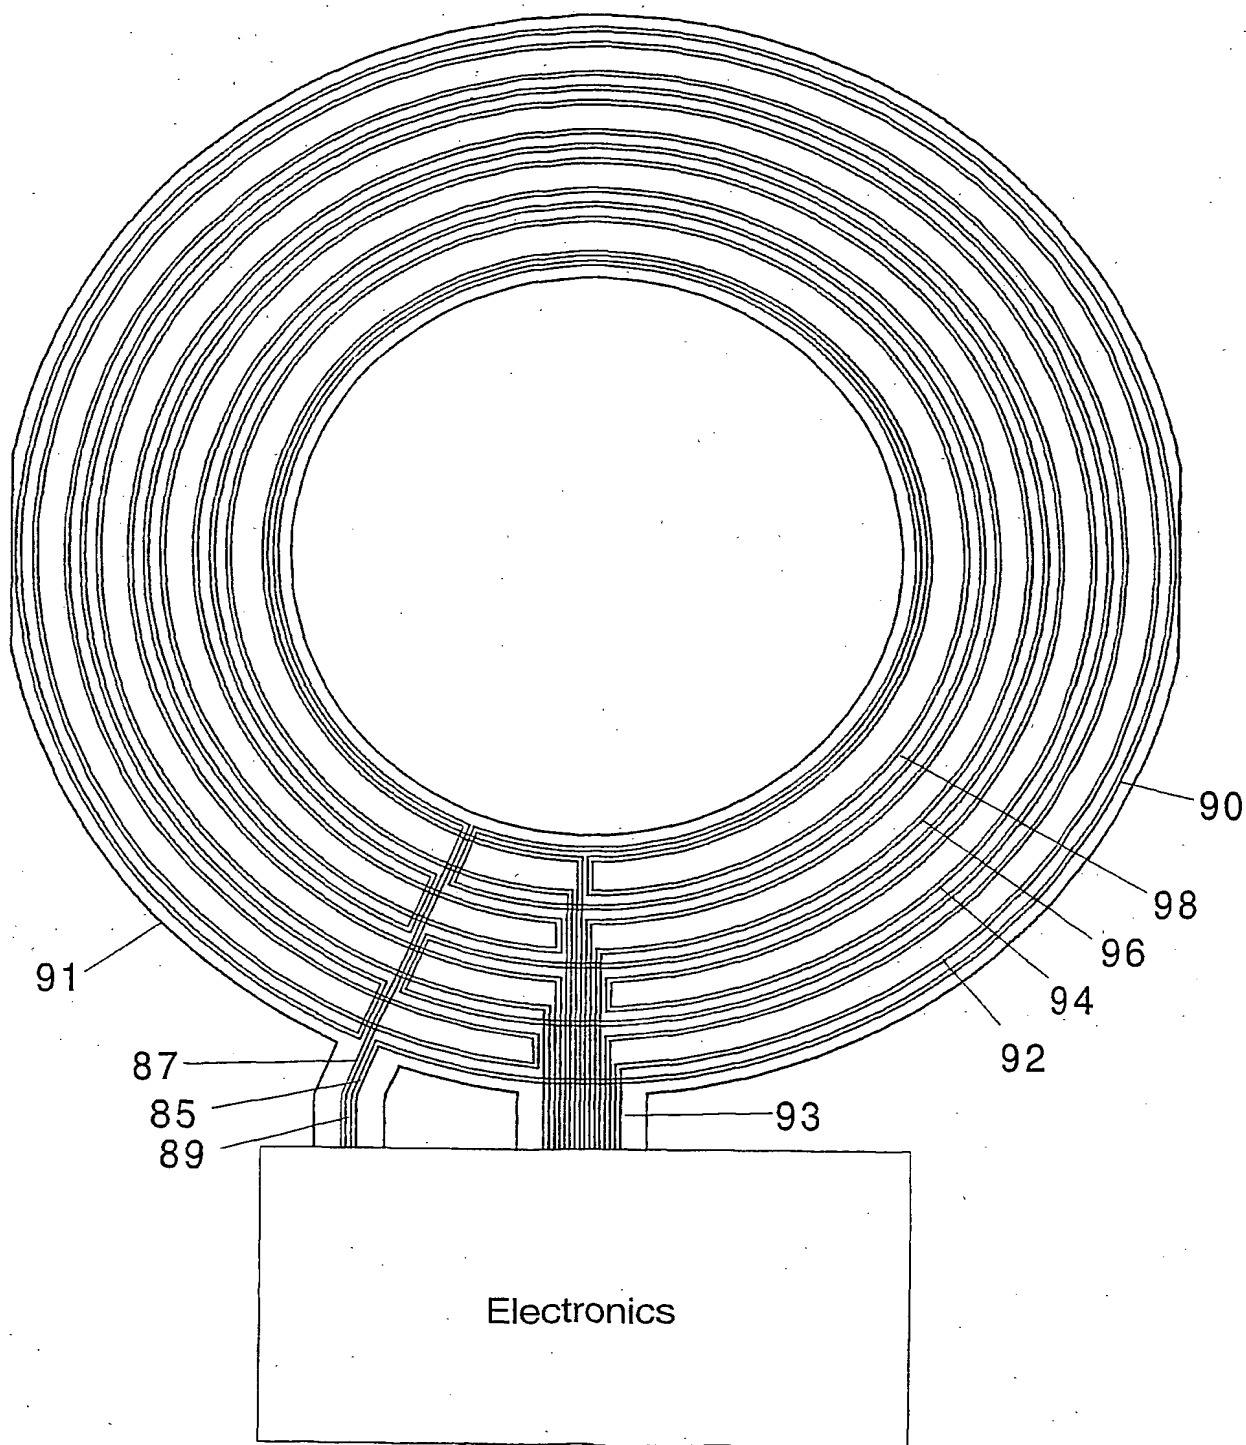


FIG. 27a

35/64

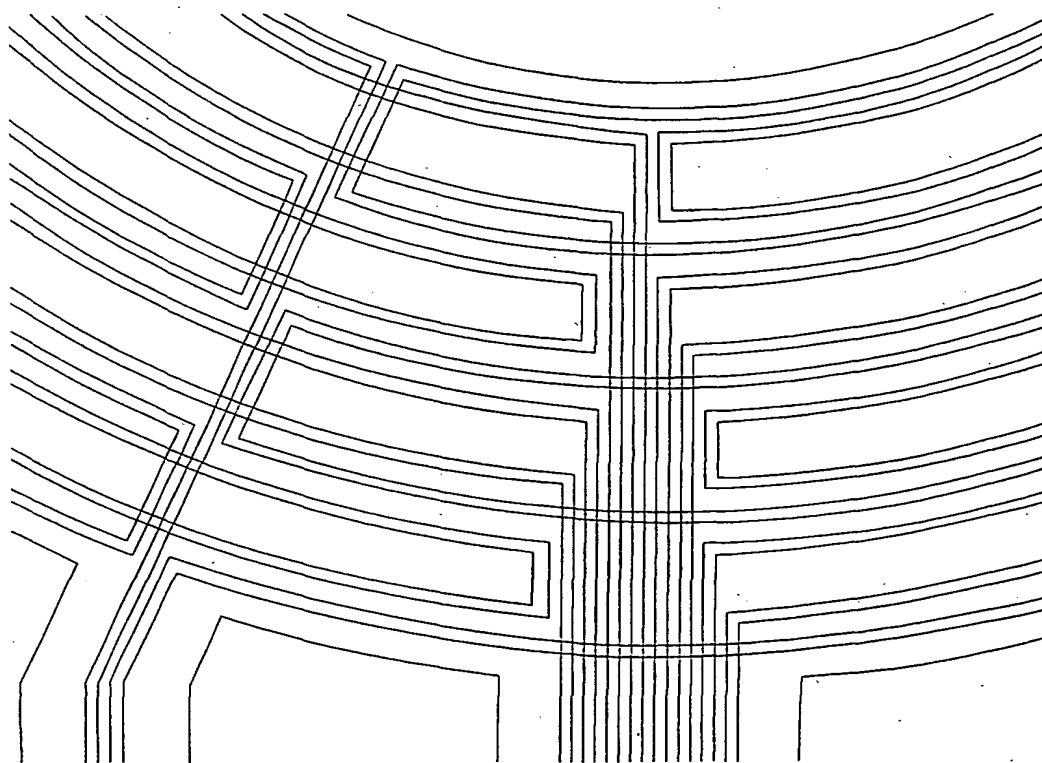


FIG. 27b

36/64

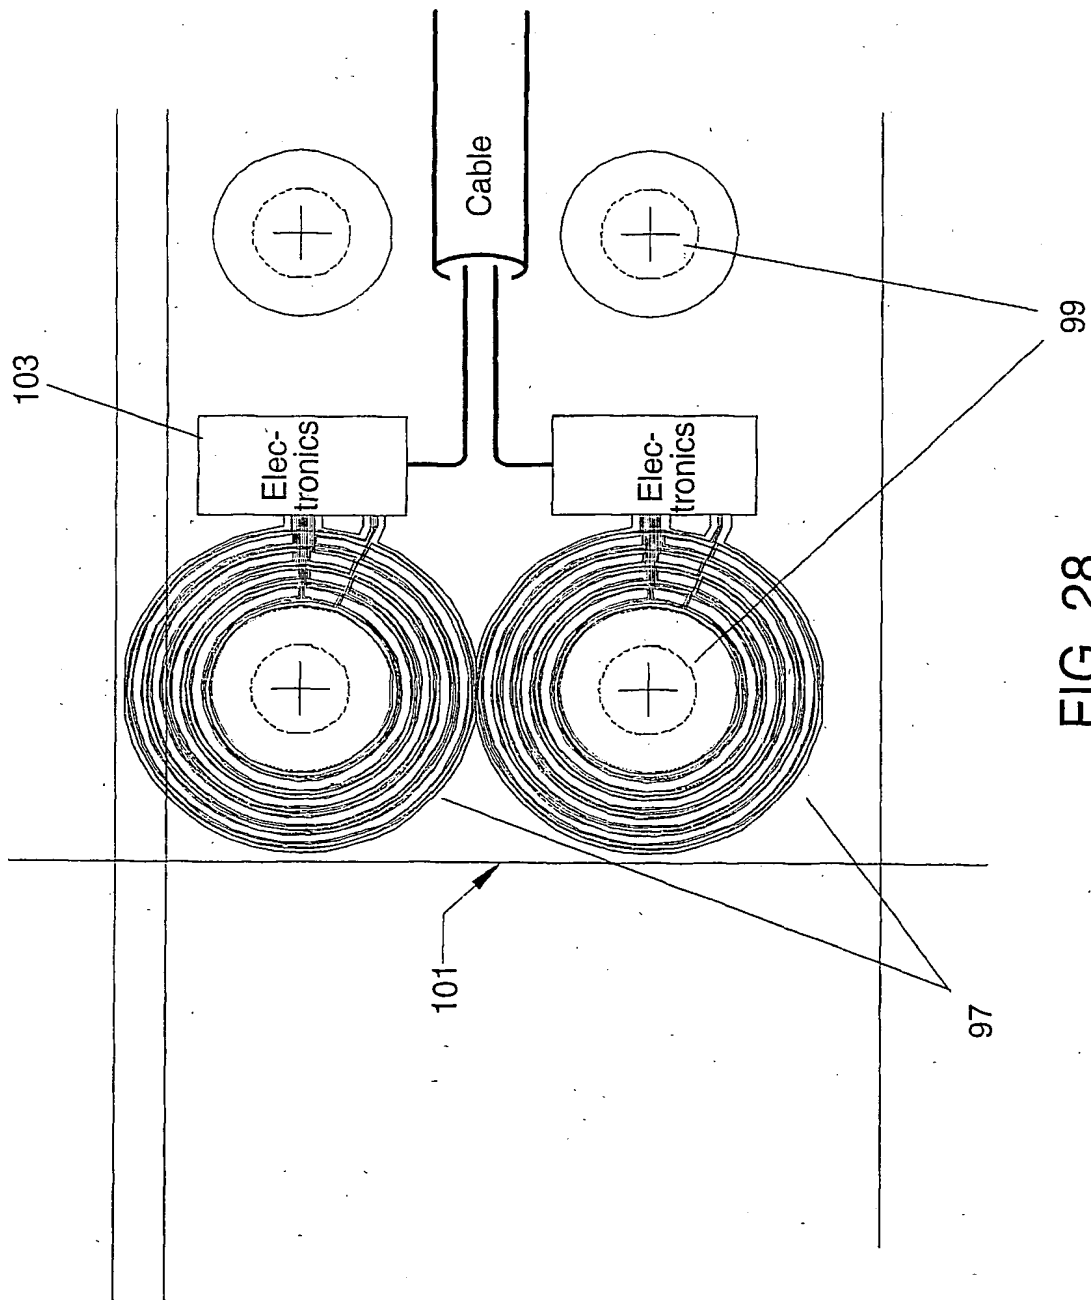


FIG. 28

37/64

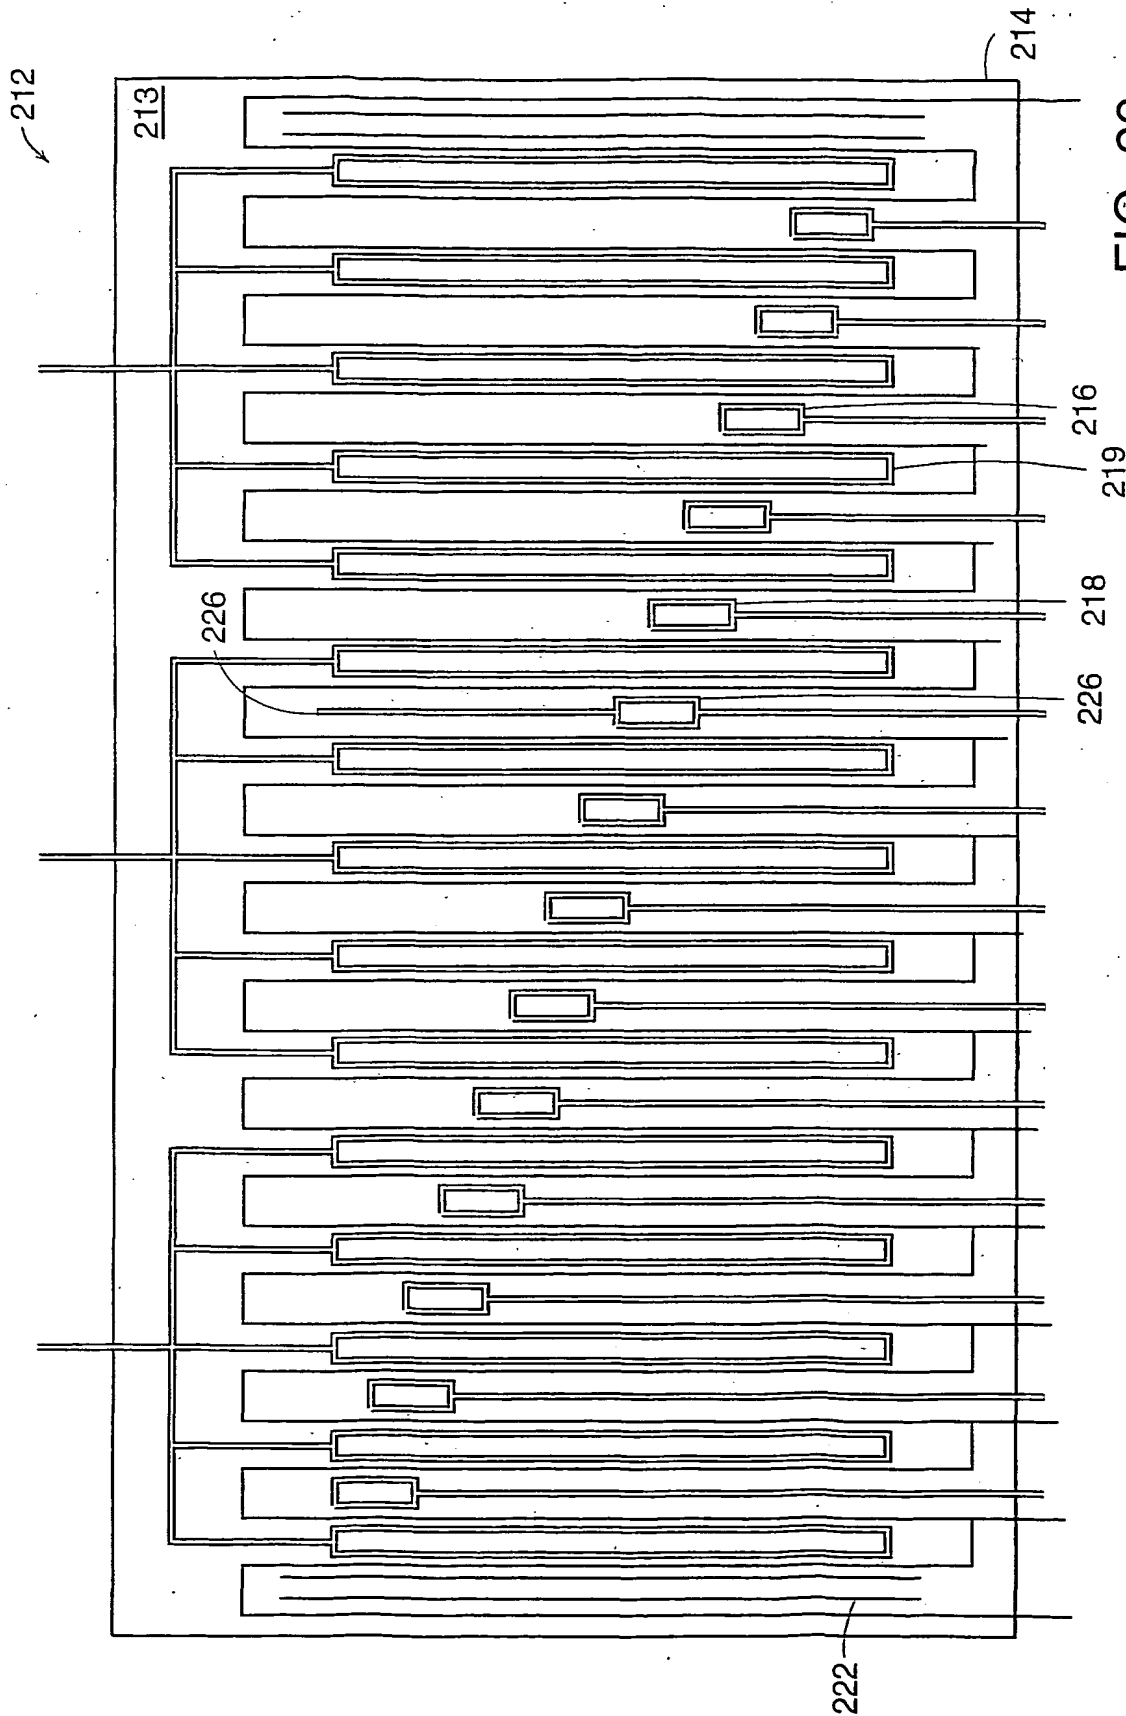


FIG. 29

80/94

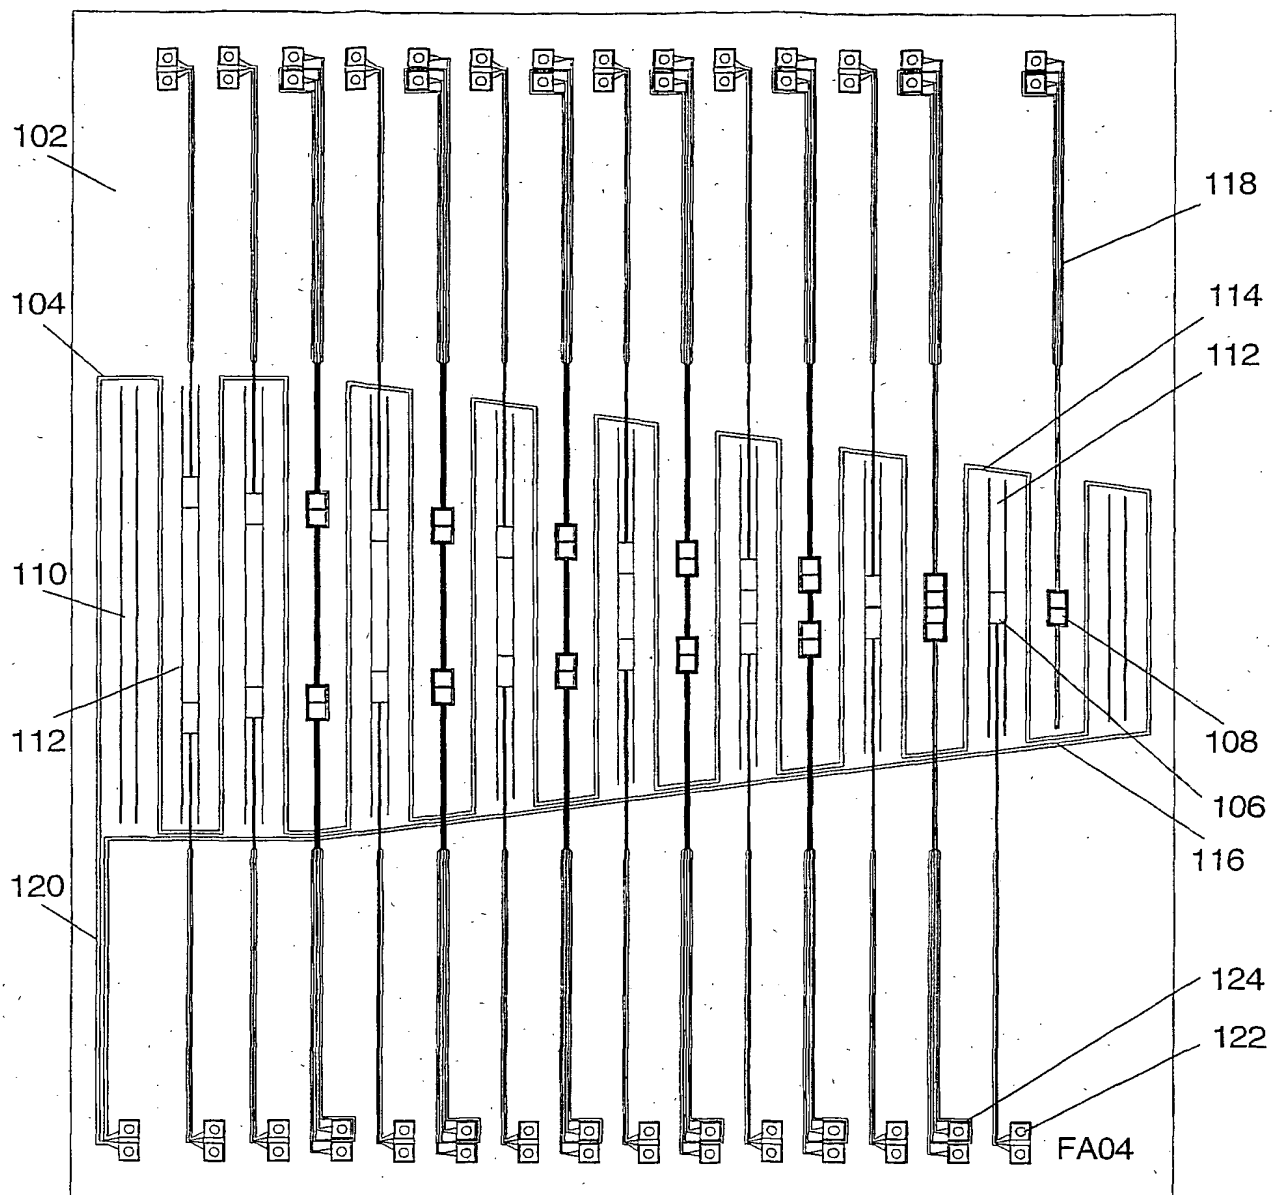


FIG. 30

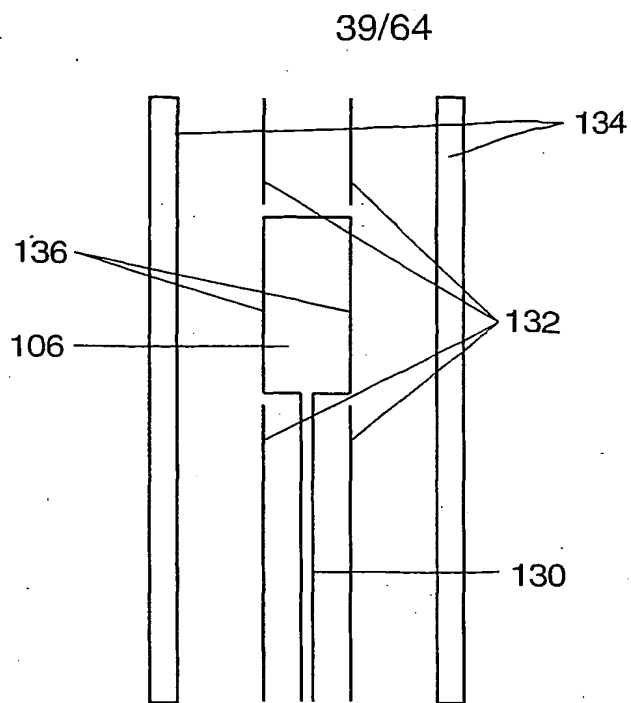


FIG. 31

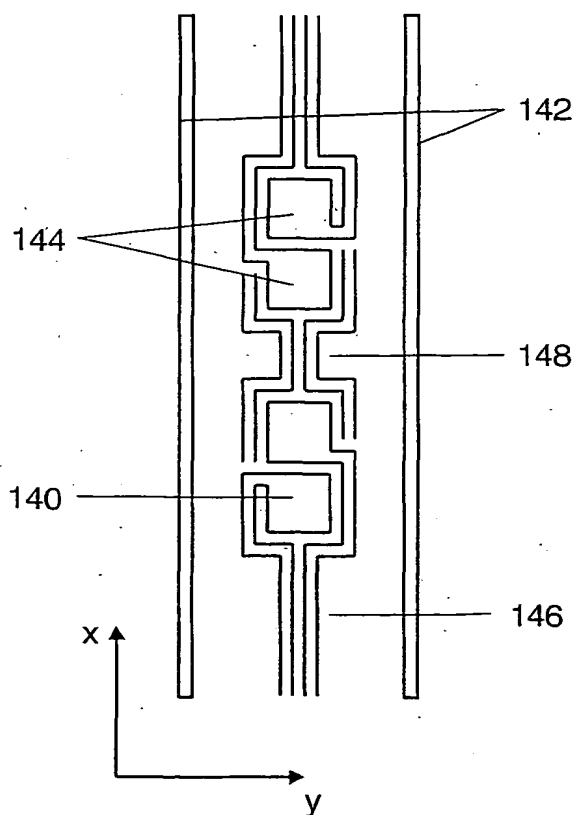


FIG. 32

40/64

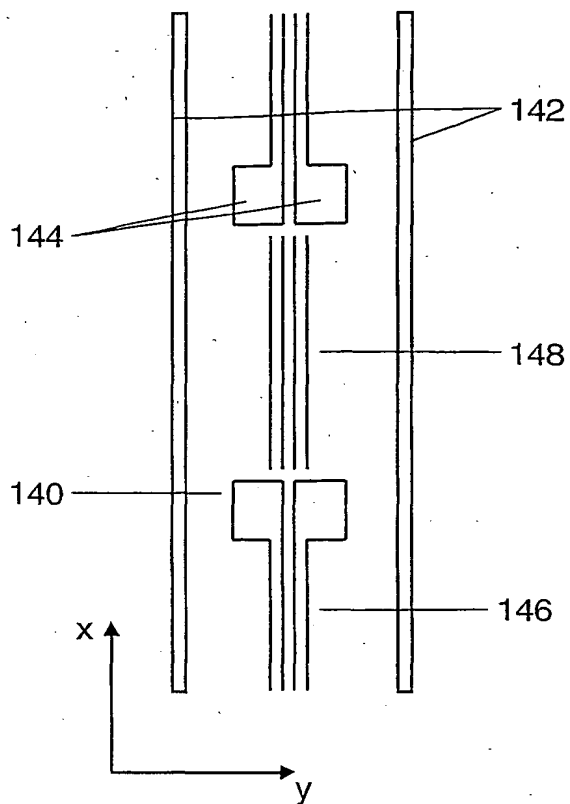


FIG. 33

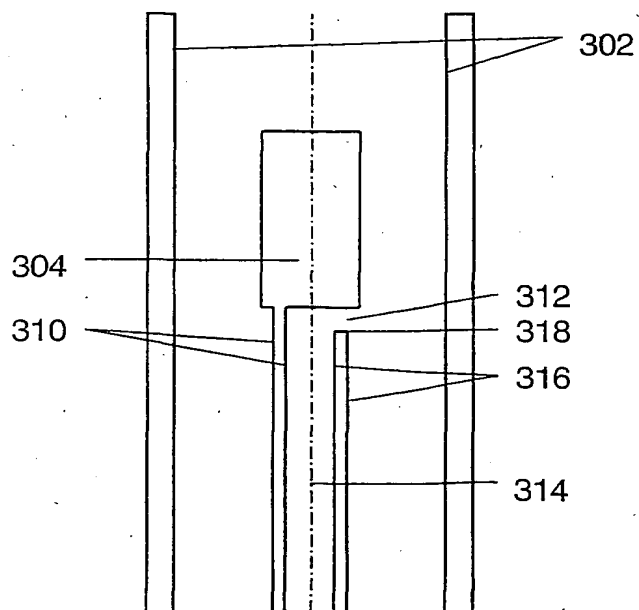


FIG. 34

41/64

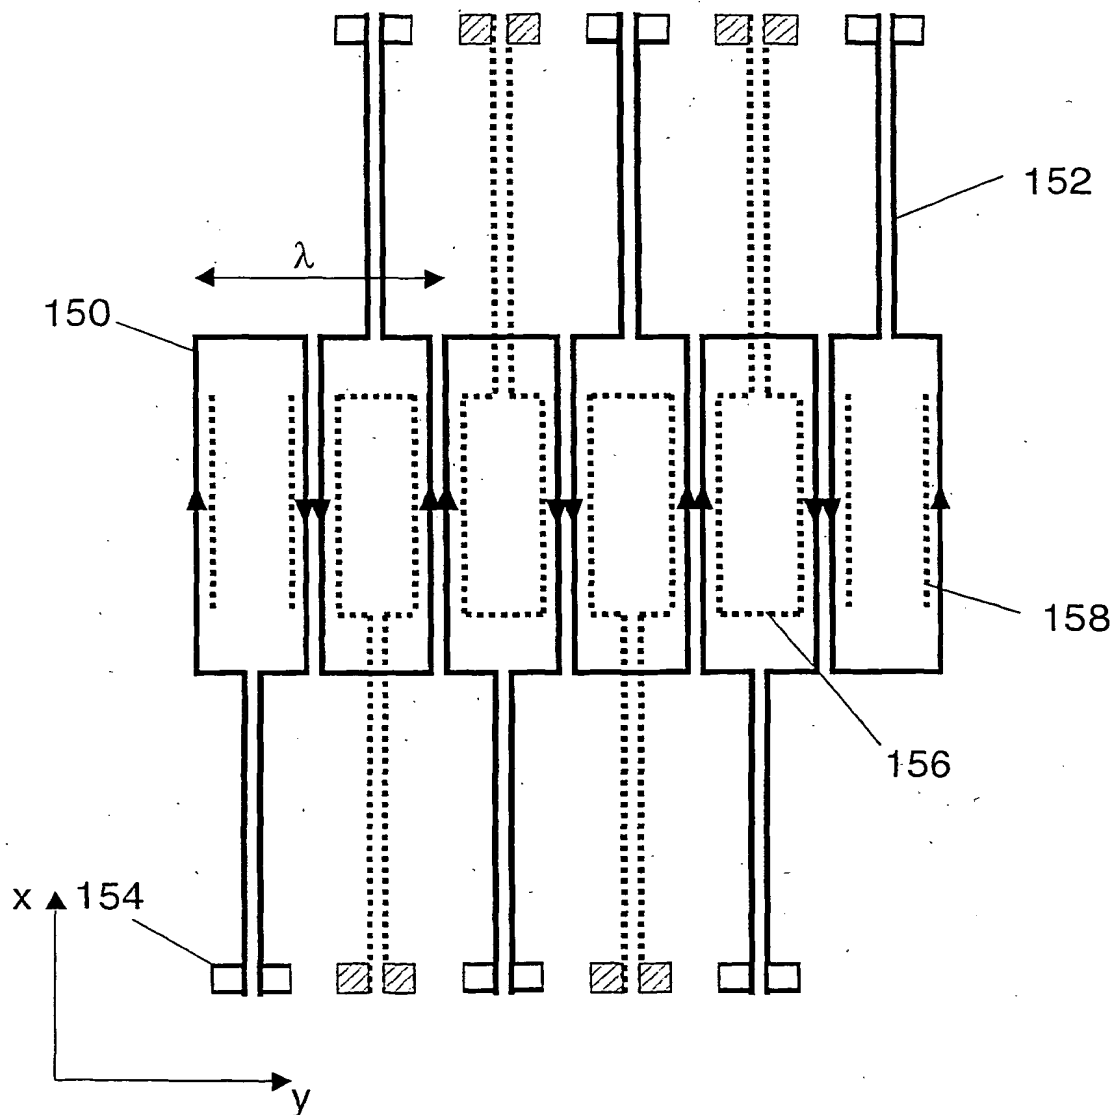


FIG. 35

42/64

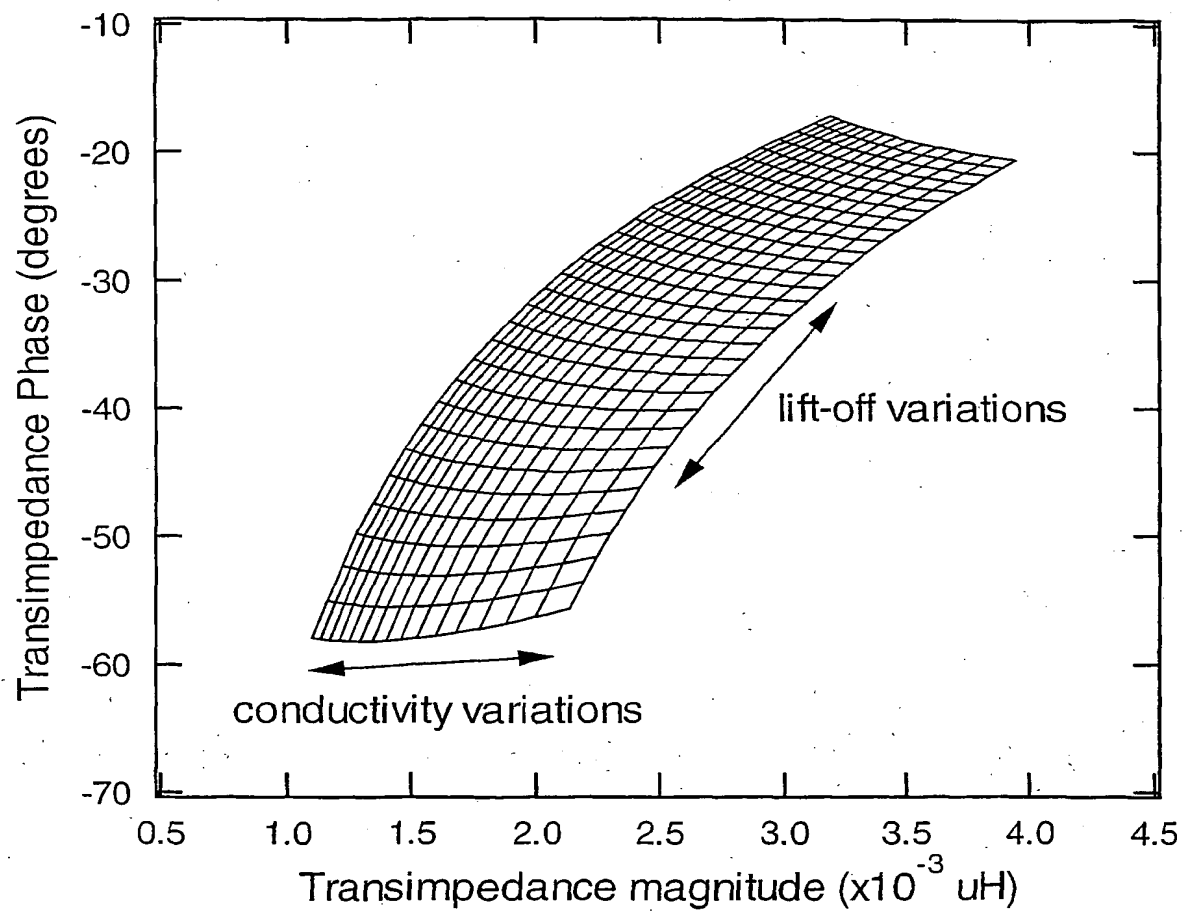


FIG. 36

43/64

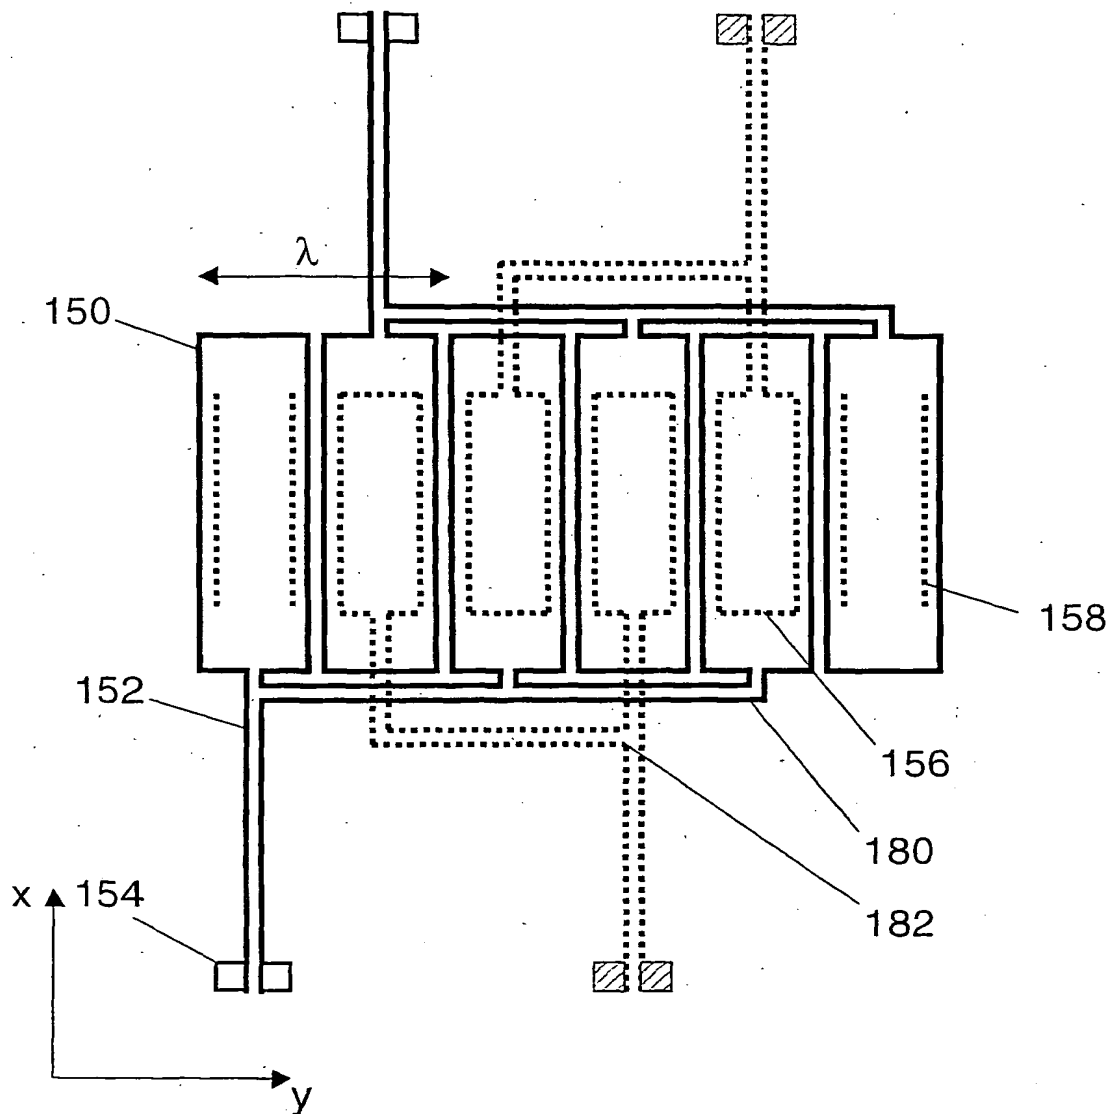


FIG. 37

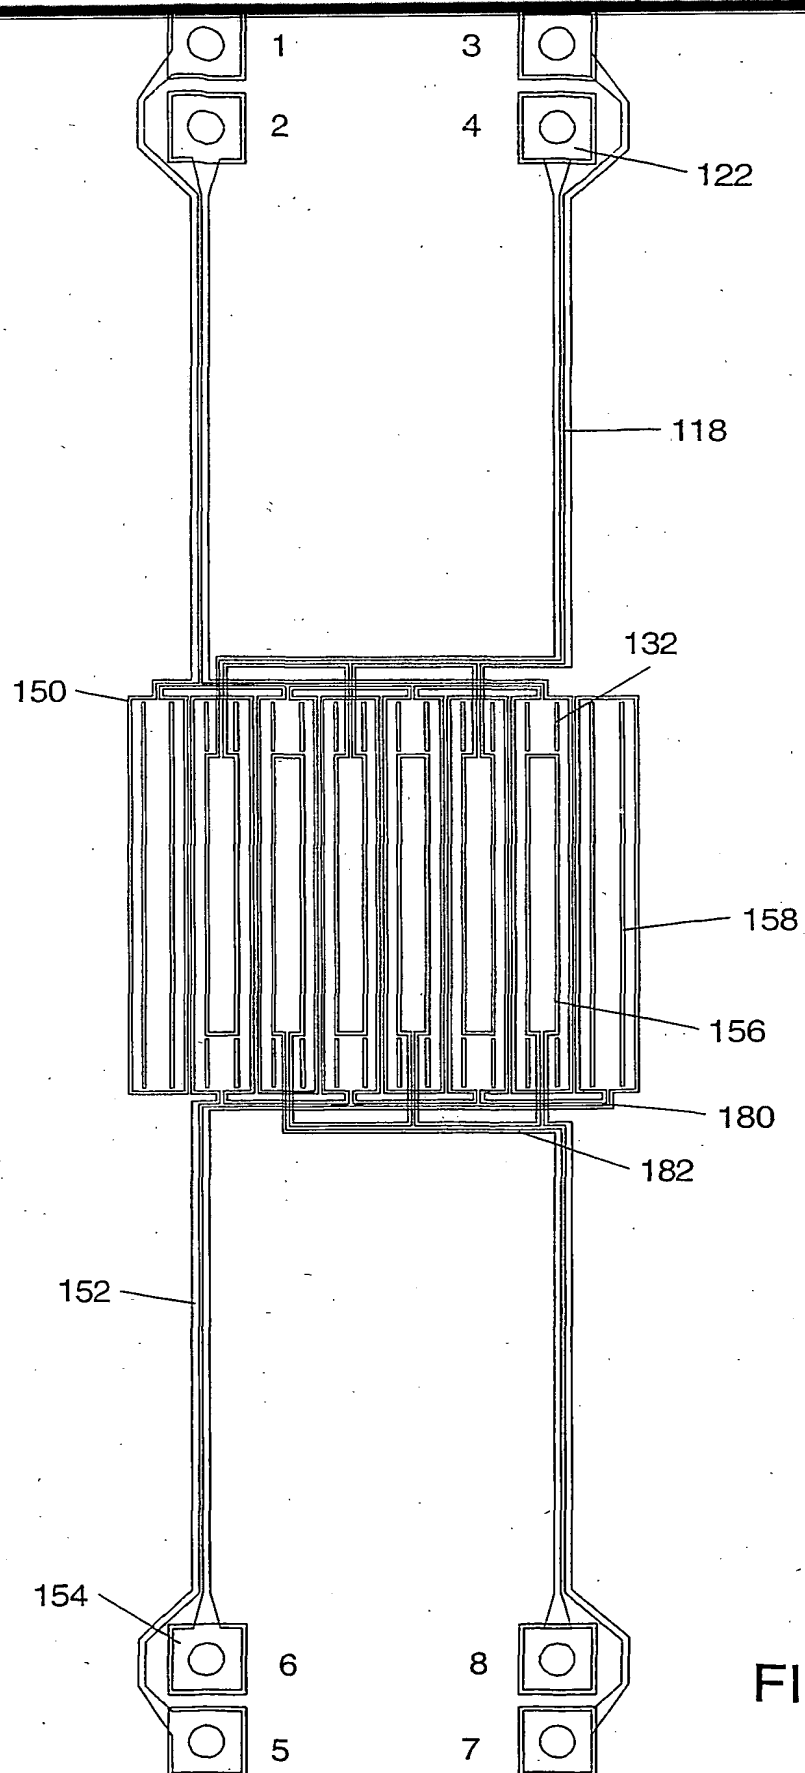


FIG. 38a

45/64

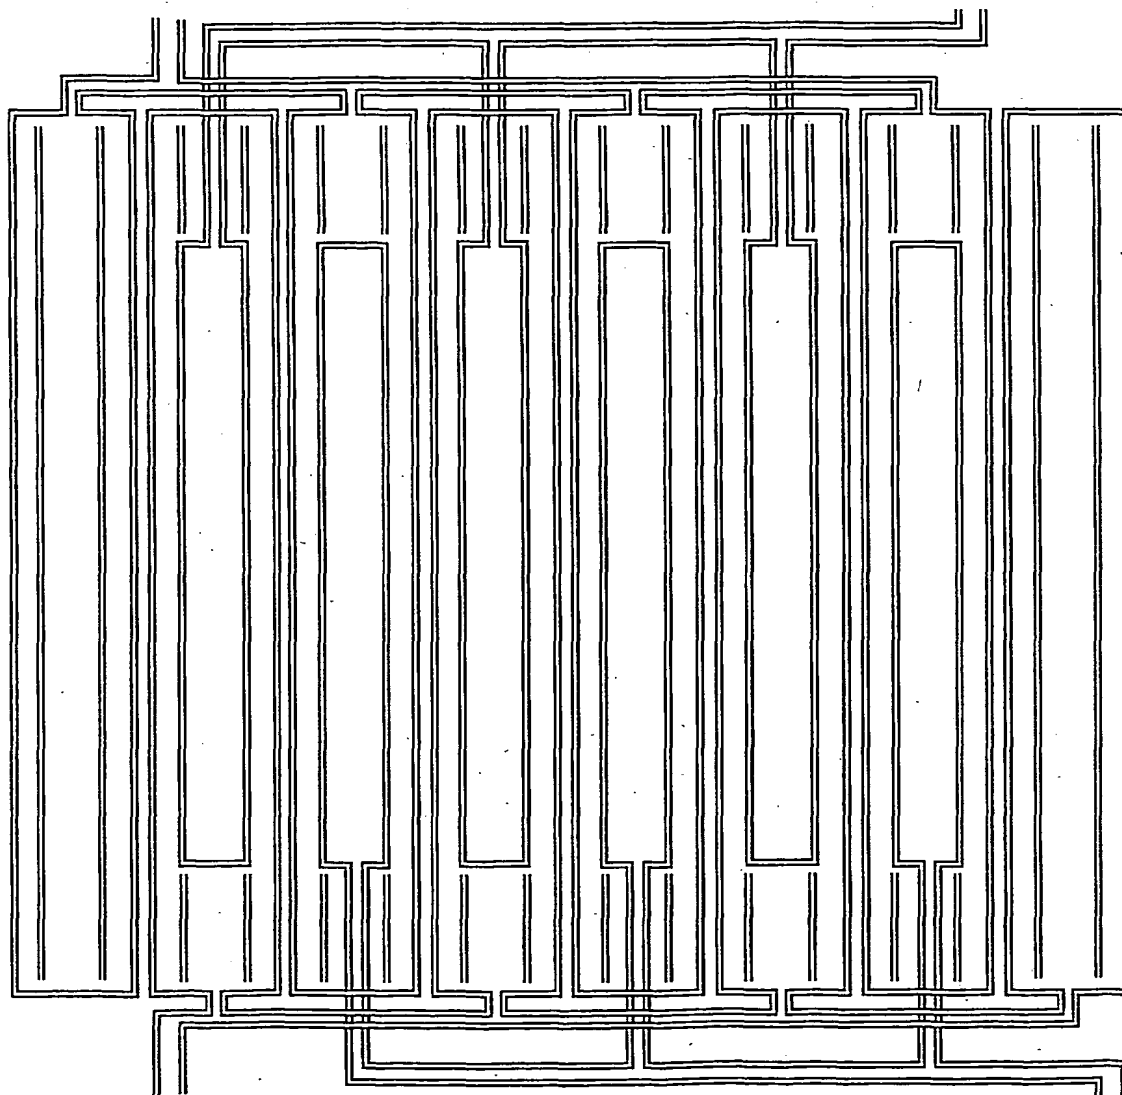


FIG. 38b

46/64

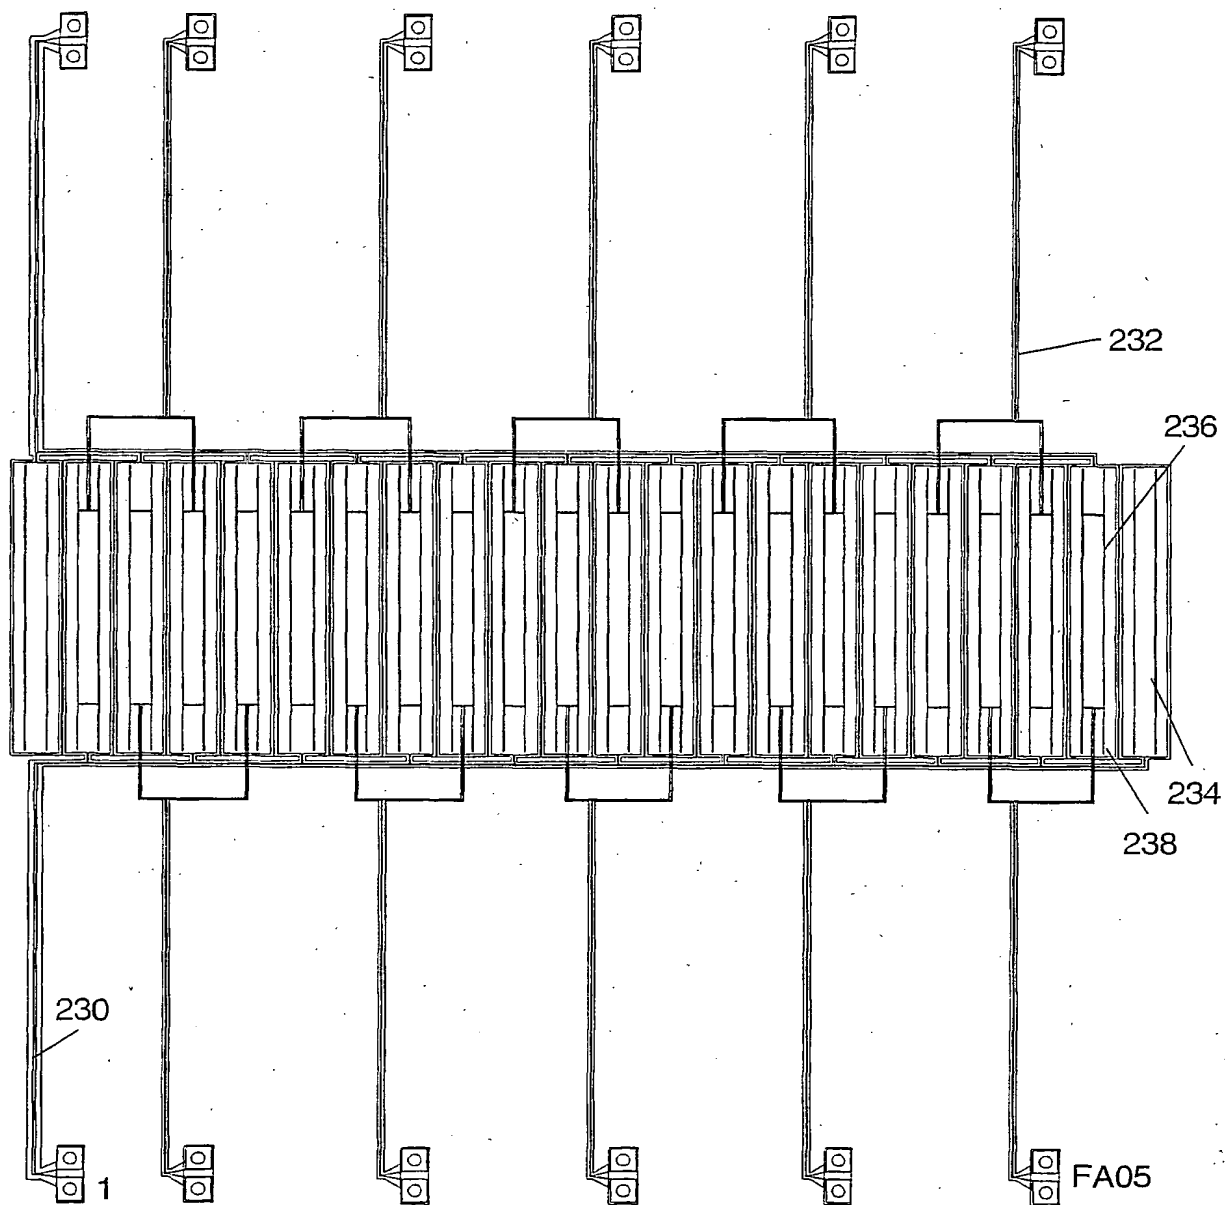


FIG. 39

47/64

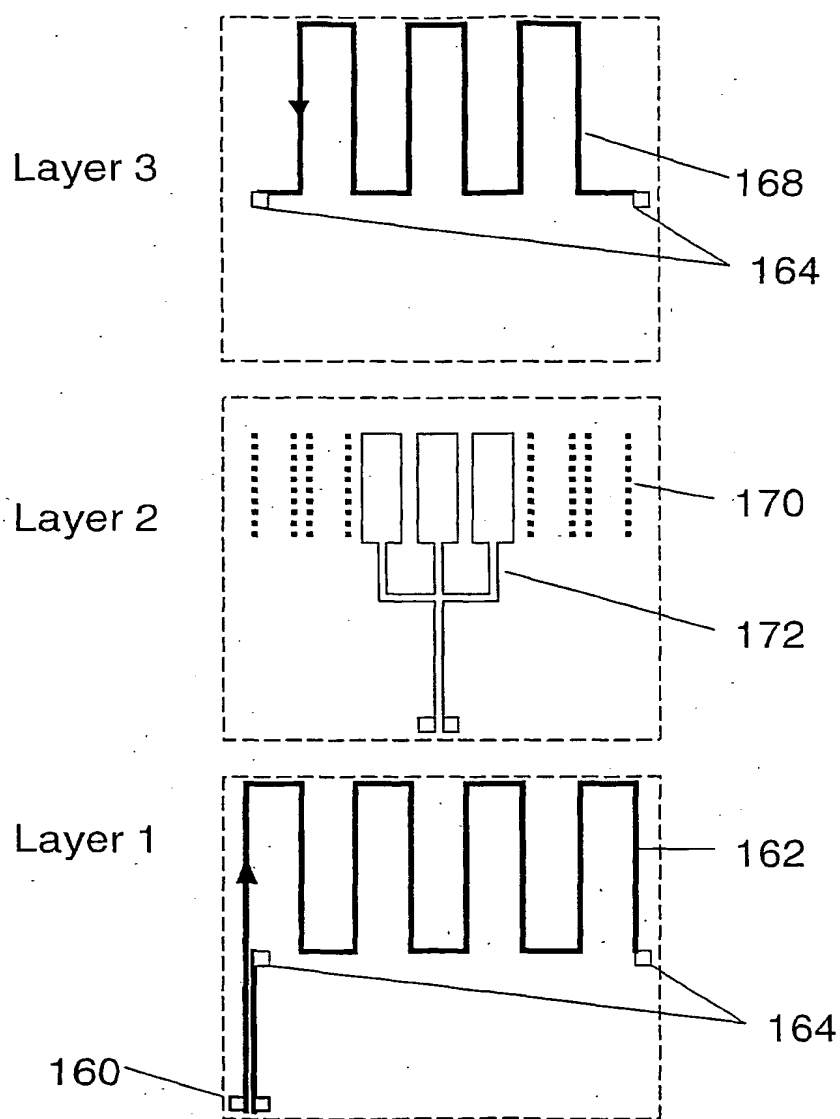
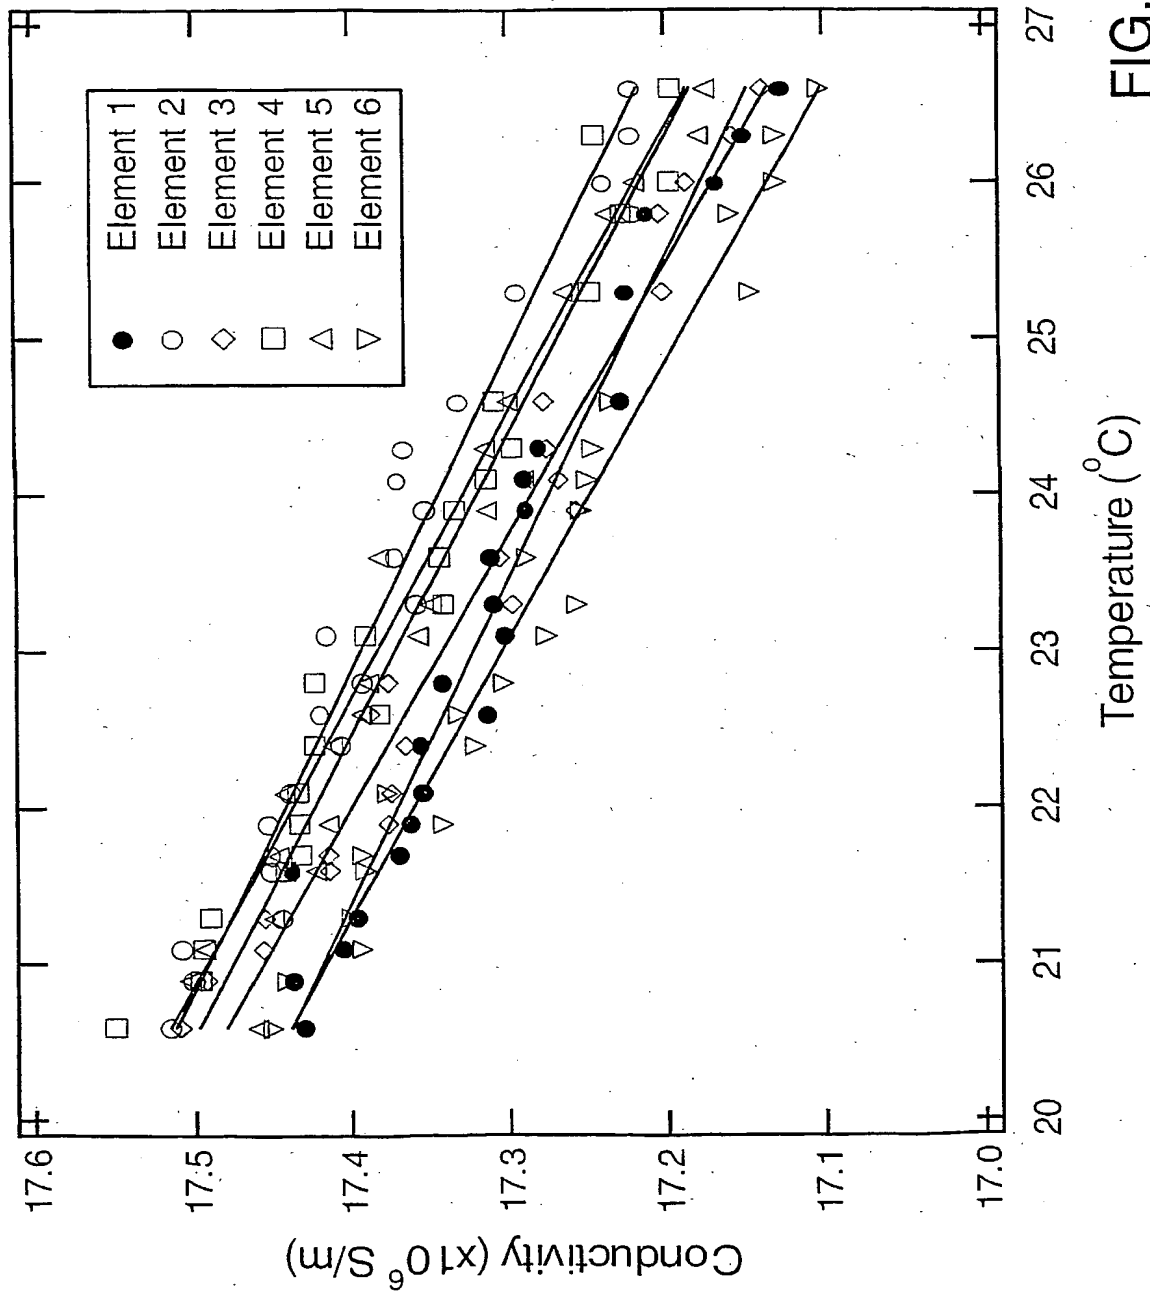


FIG. 40



49/64

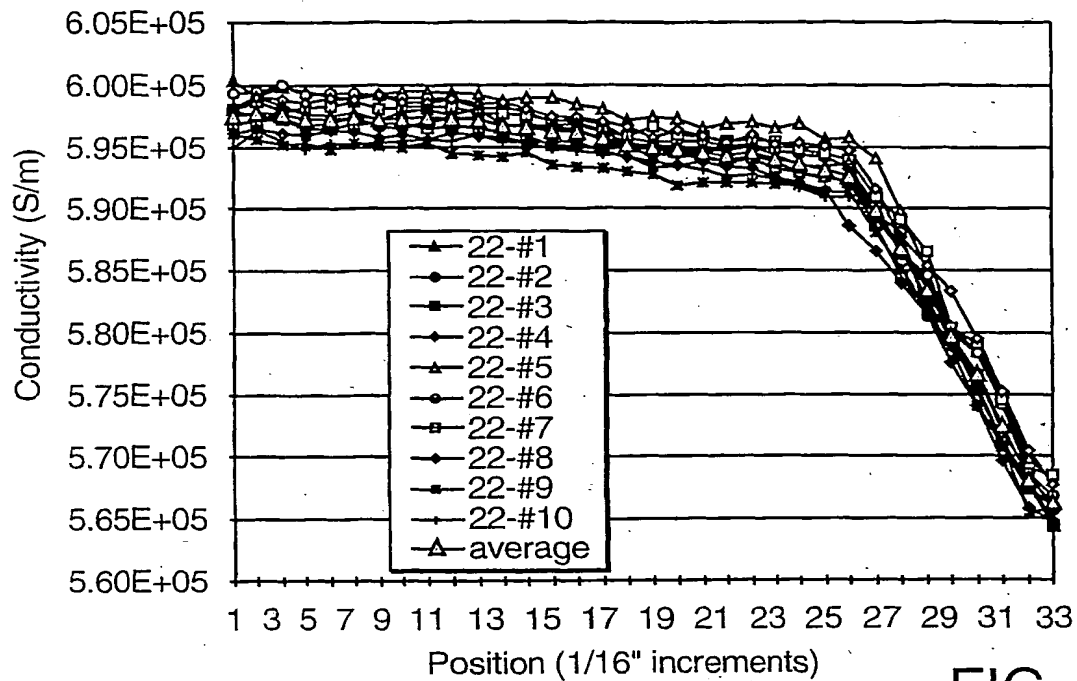


FIG. 42a

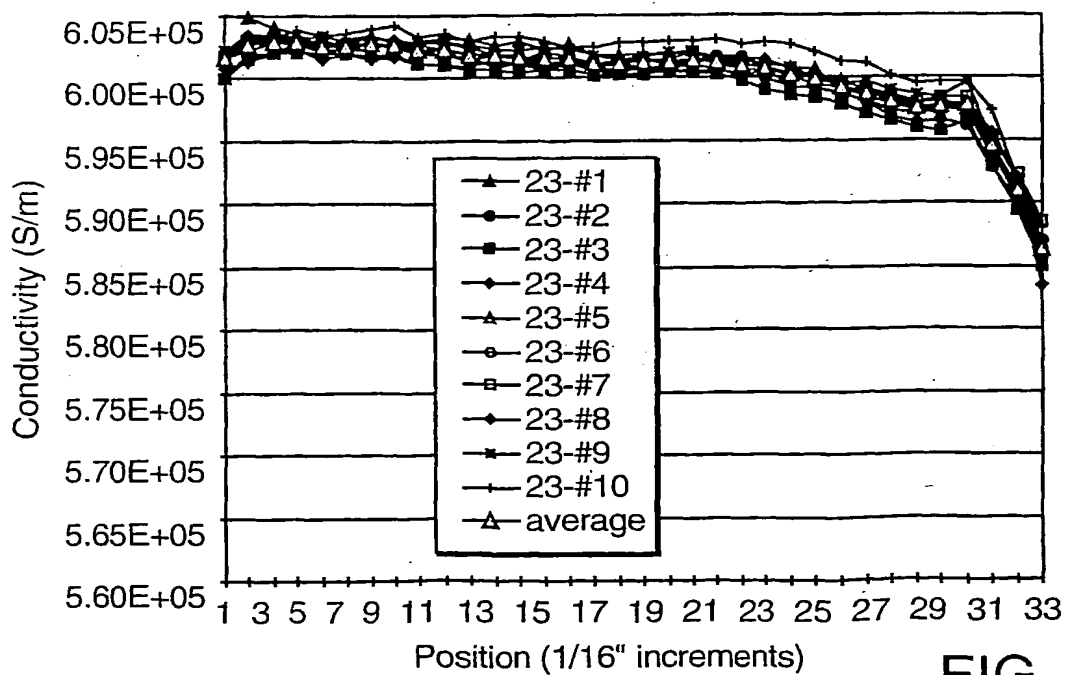


FIG. 42b

50/64

FIG.
43aFIG.
43b
FIG.
43cFIG.
43d

FIG. 43

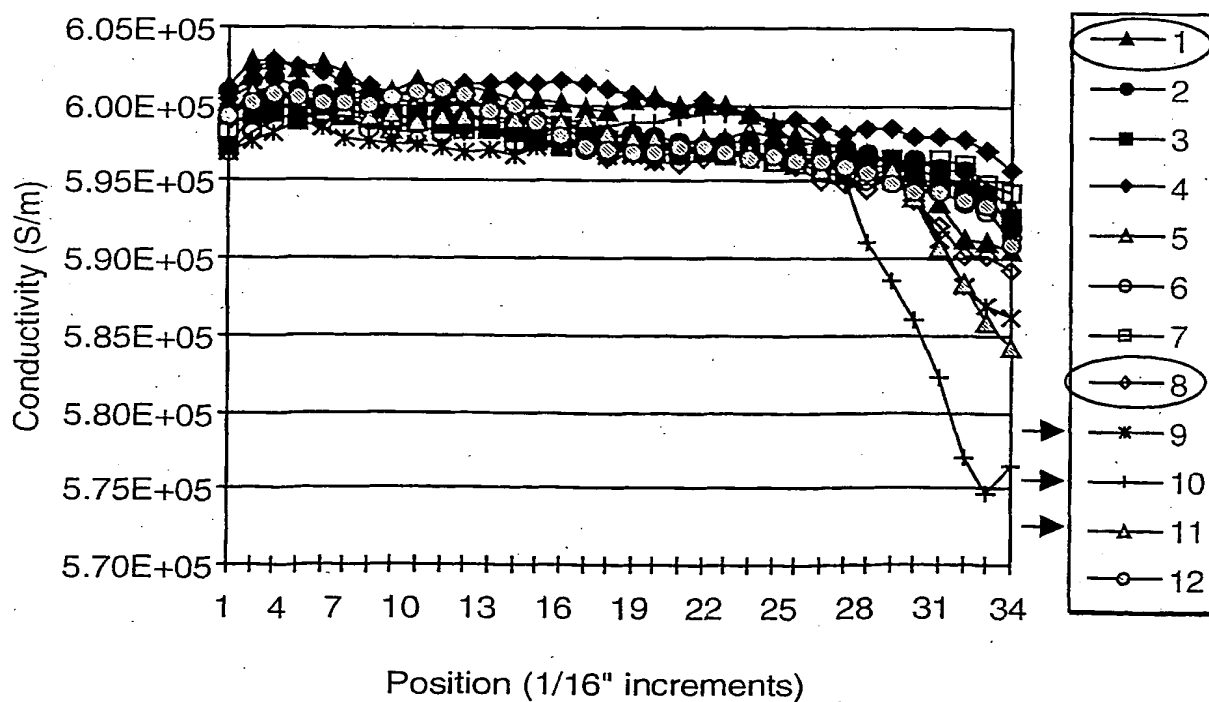


FIG. 43a

51/64

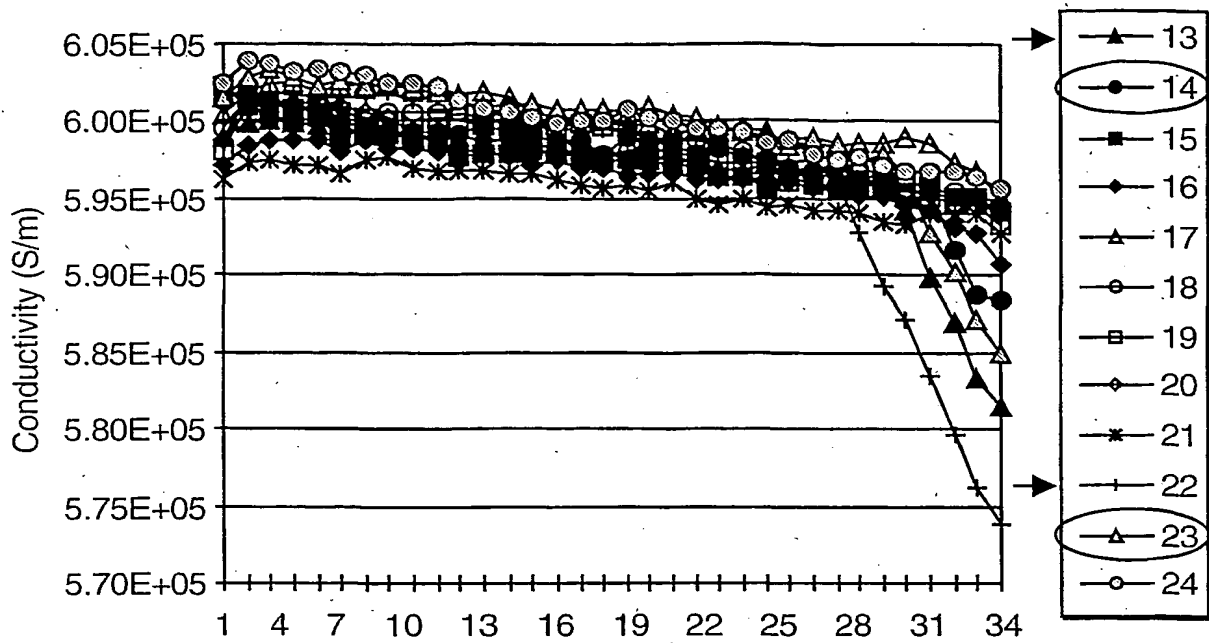


FIG. 43b

Position (1/16" increments)

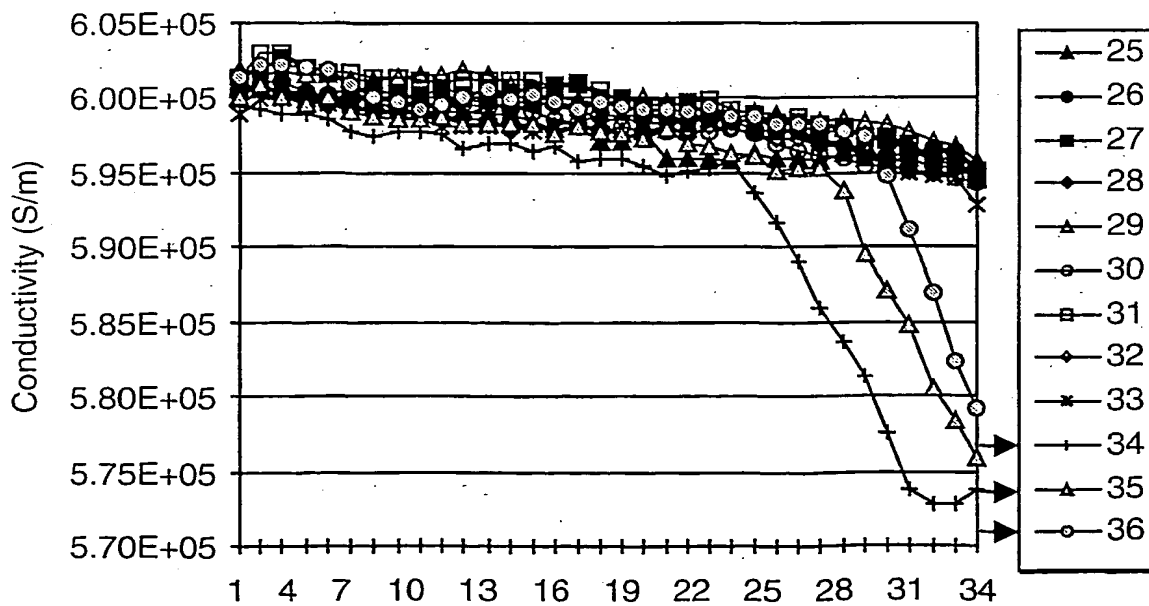


FIG. 43c

Position (1/16" increments)

52/64

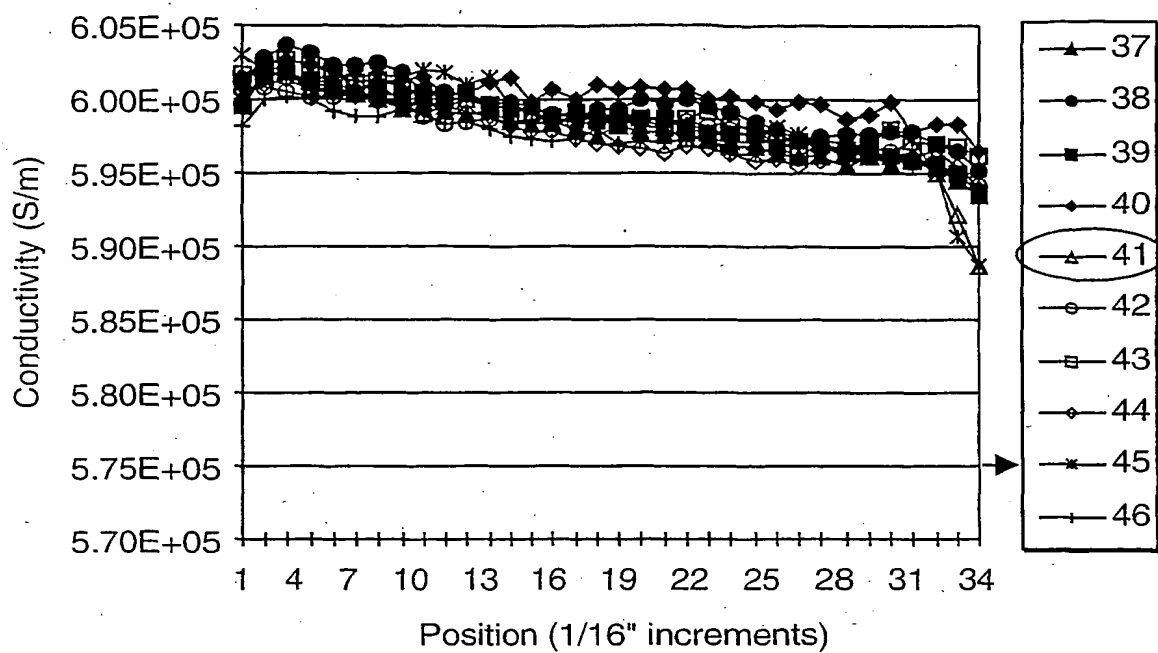


FIG. 43d

FIG. 44a

FIG. 44b

FIG. 44c

FIG. 44d

FIG. 44

53/64

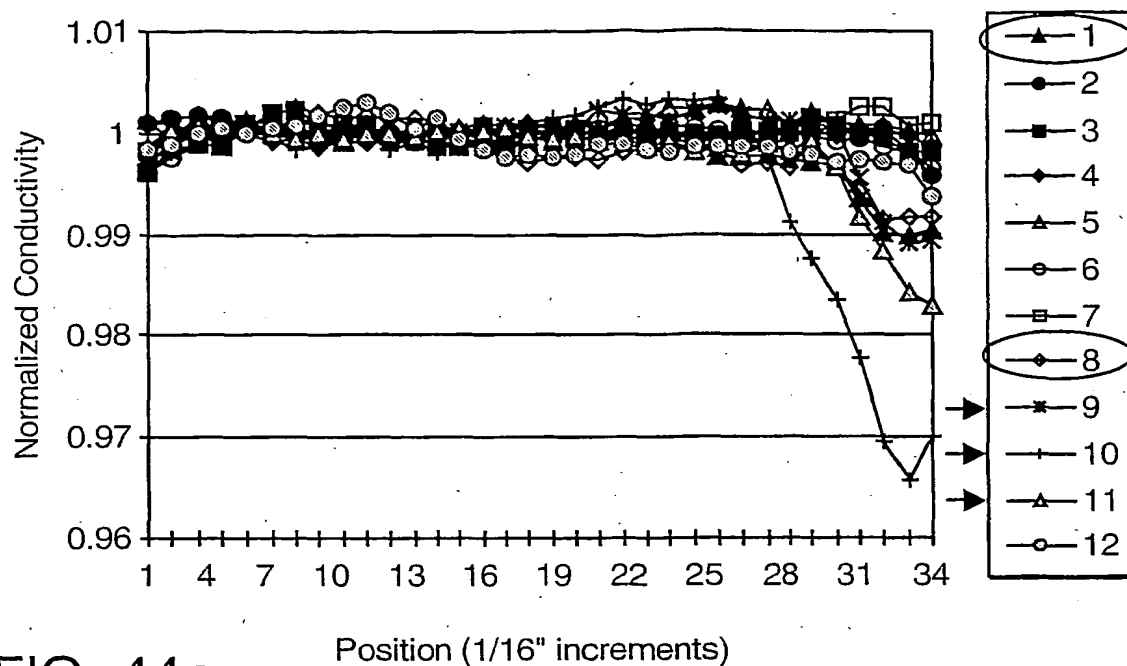


FIG. 44a

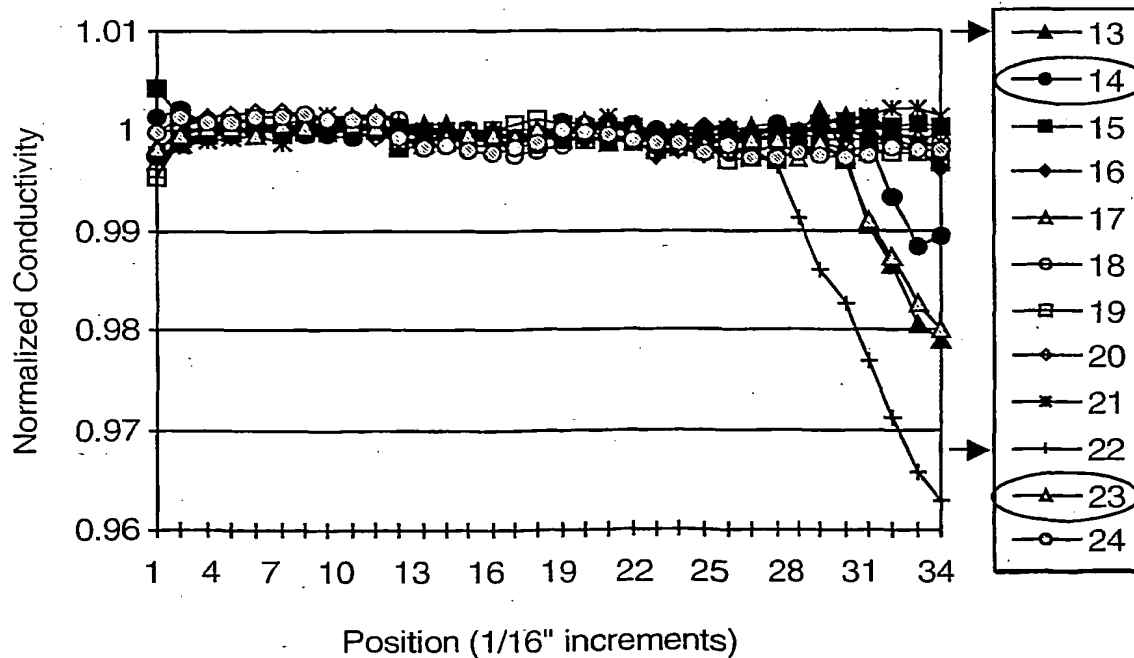
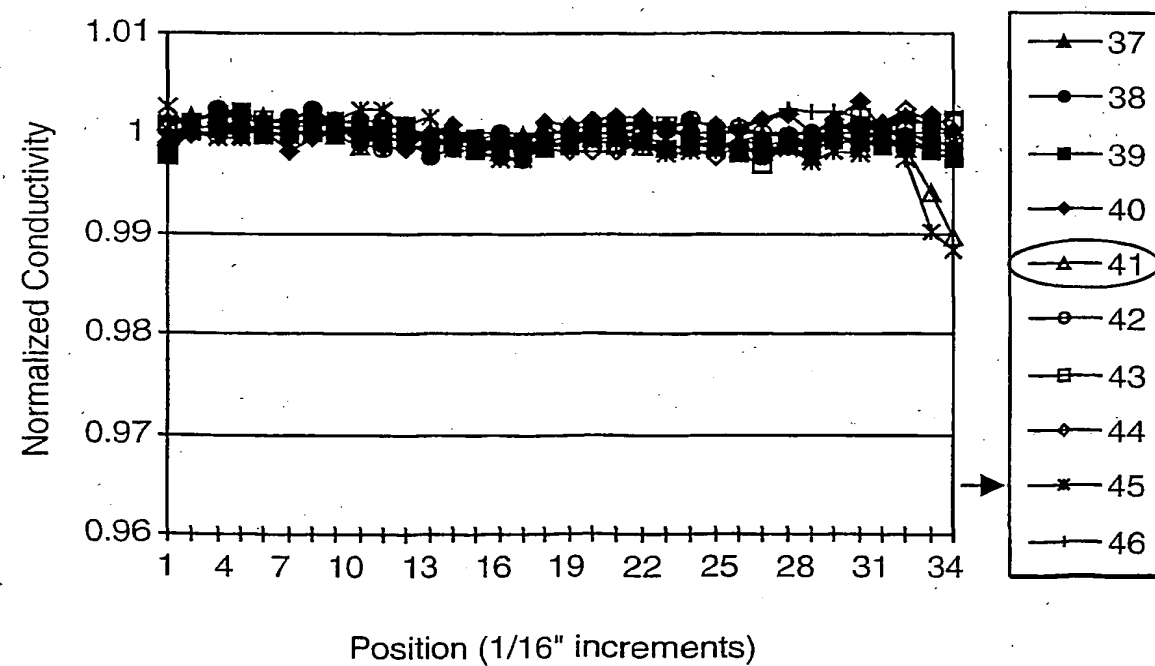
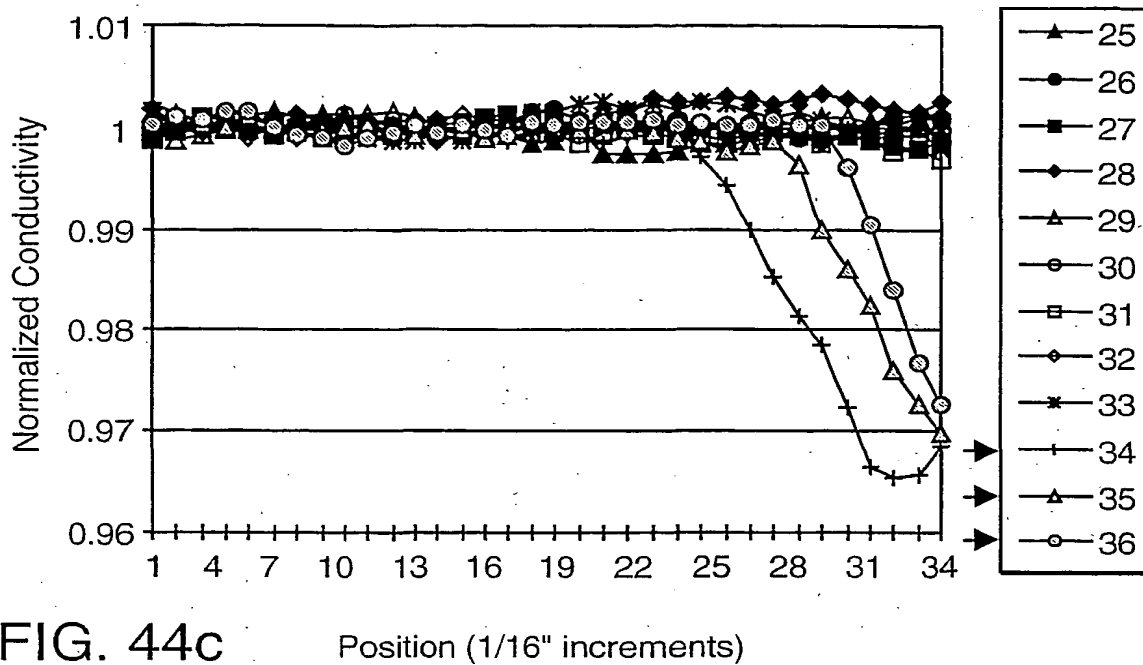


FIG. 44b

54/64



55/64

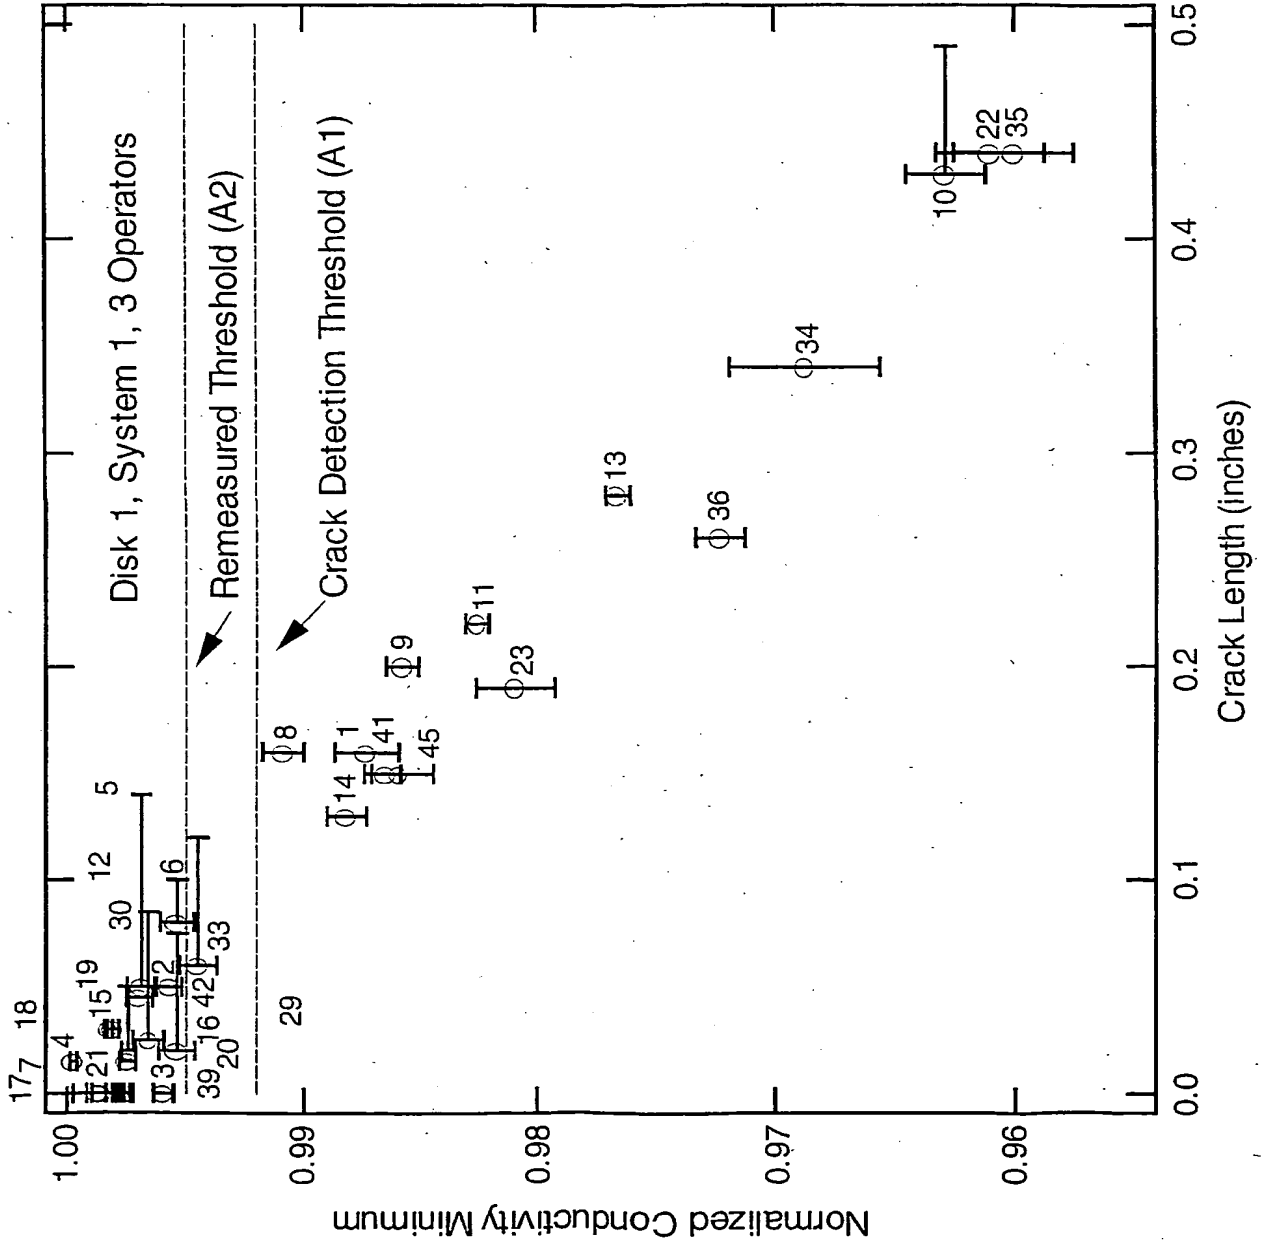


FIG. 45a

56/64

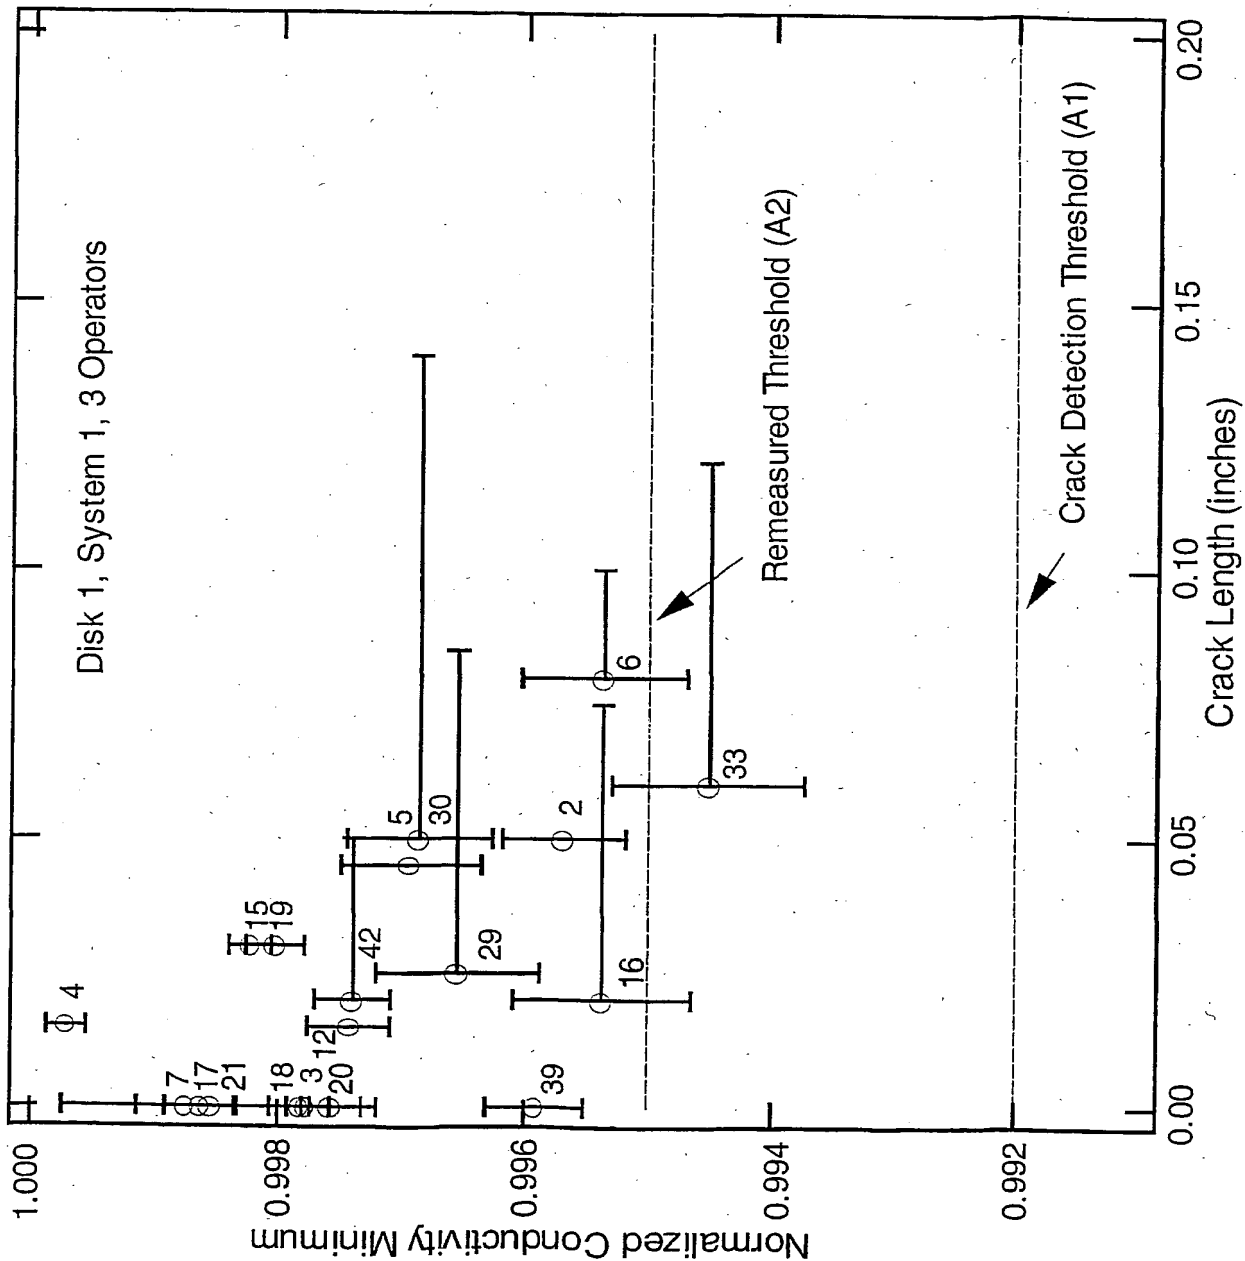


FIG. 45b

57/64

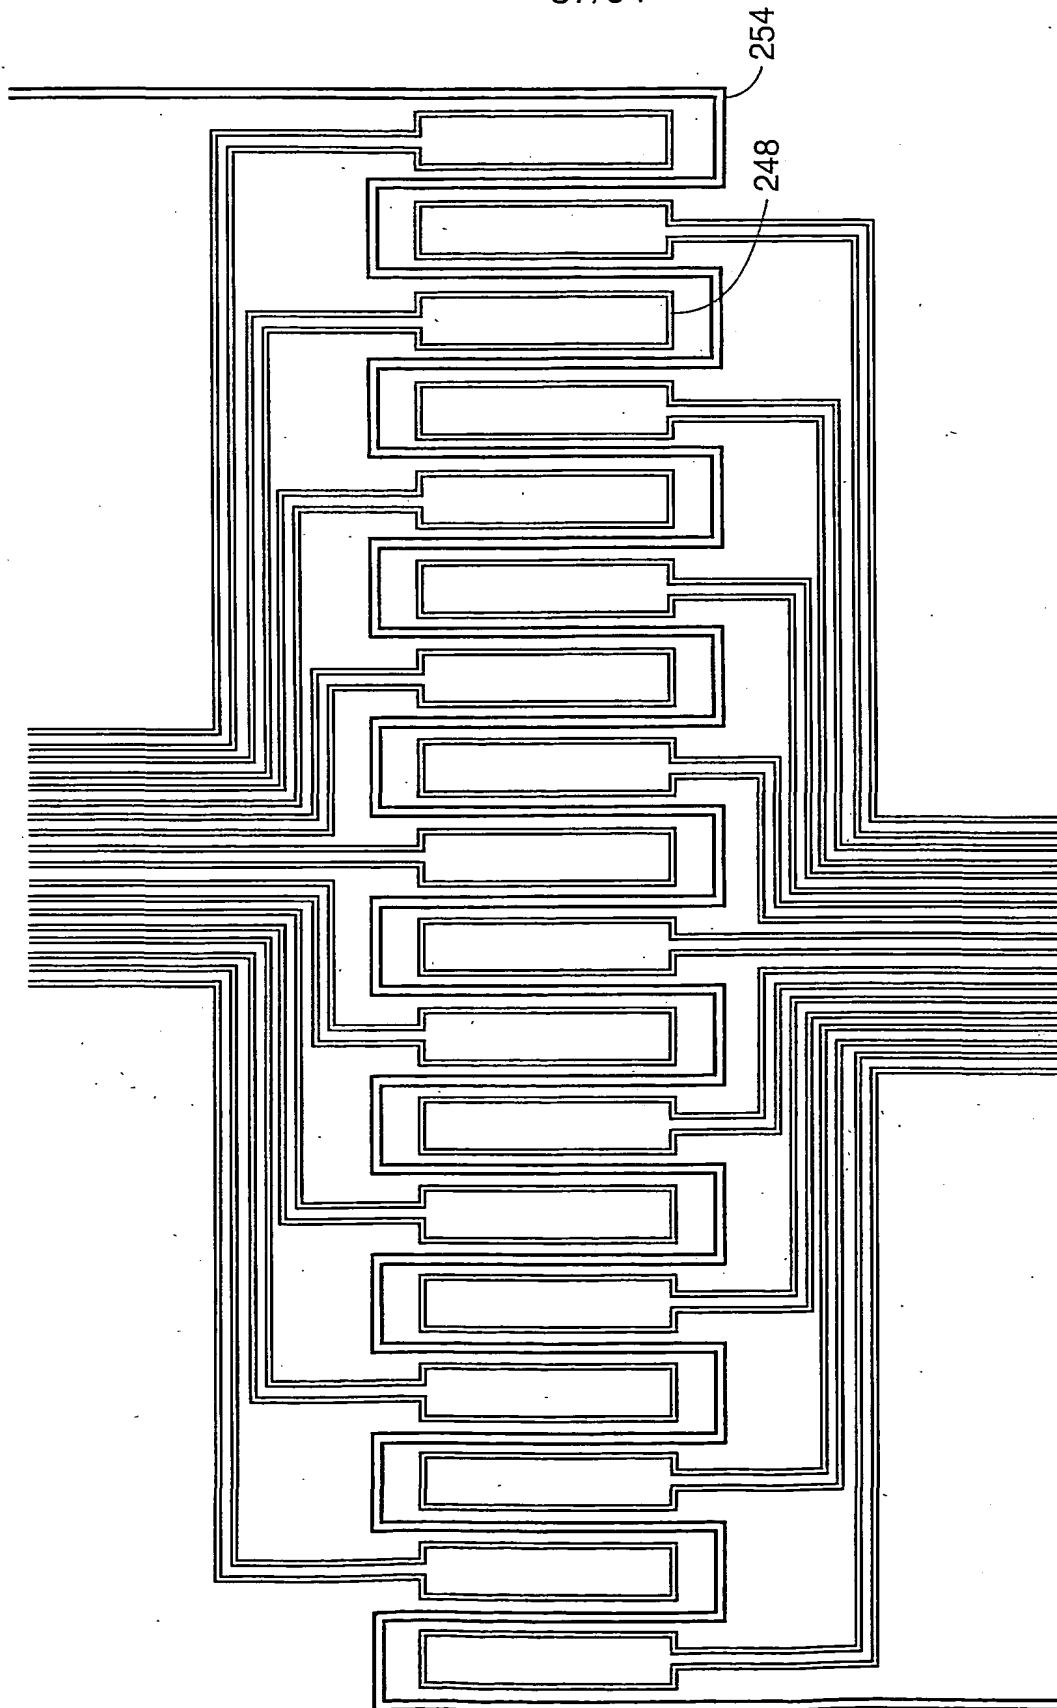


FIG. 46

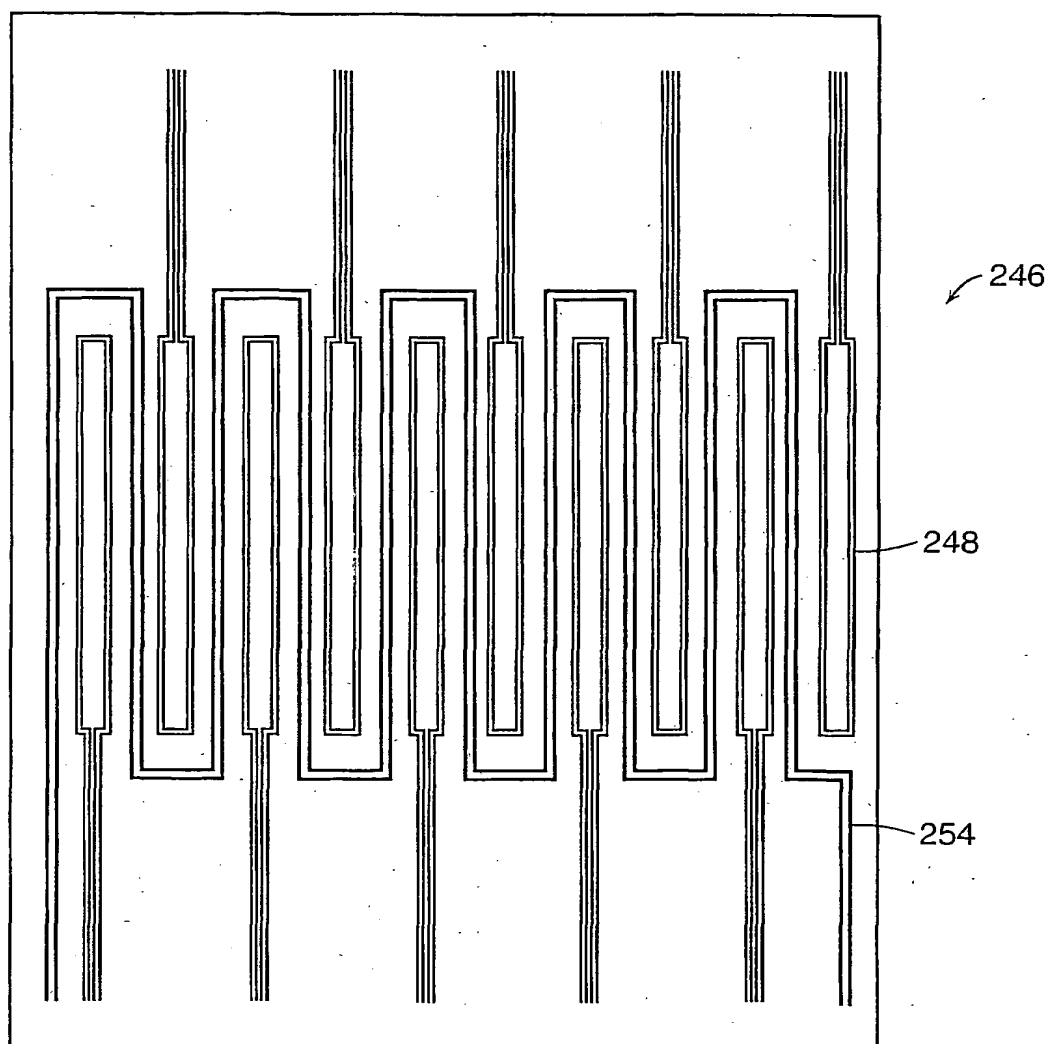


FIG. 47

59/64

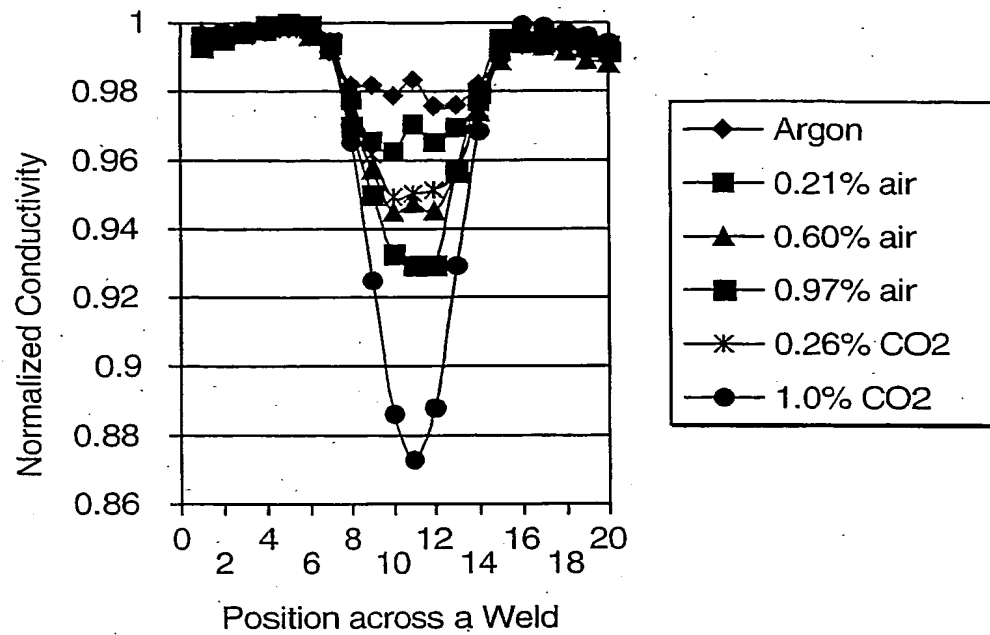
MWM Monitoring of Weld Quality in
GTAW Ti-2 Welds at 400 kHz

FIG. 48

60/64

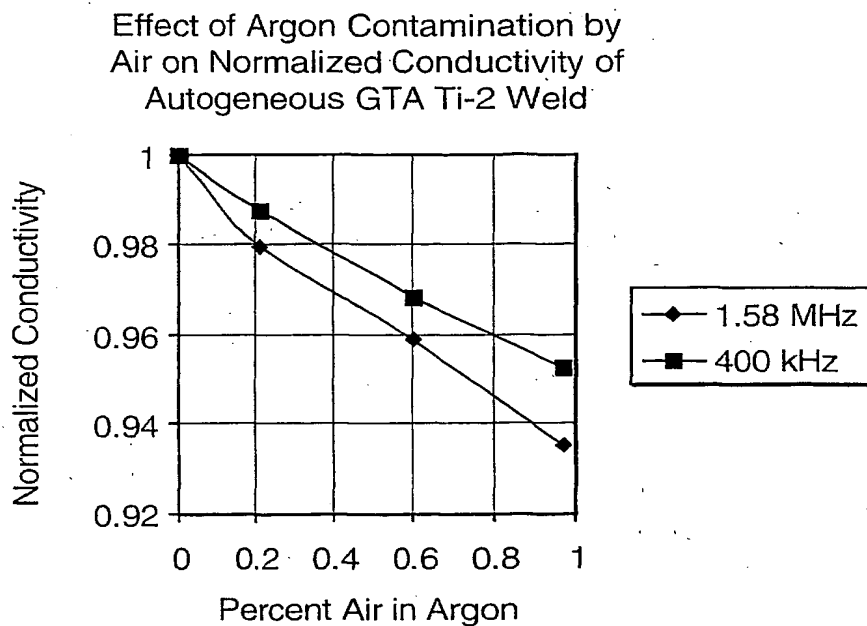


FIG. 49

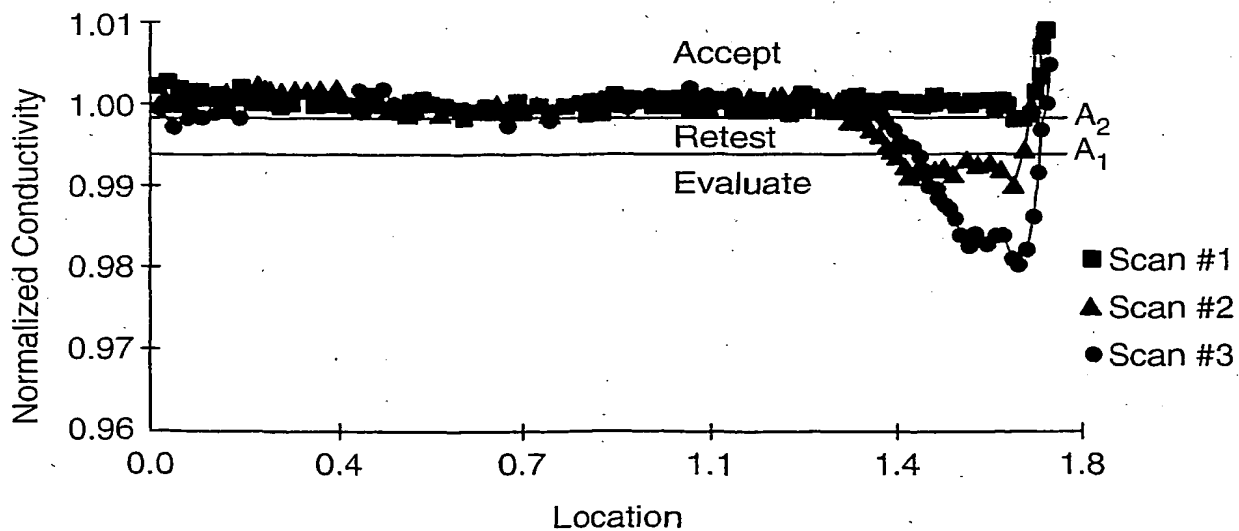


FIG. 50

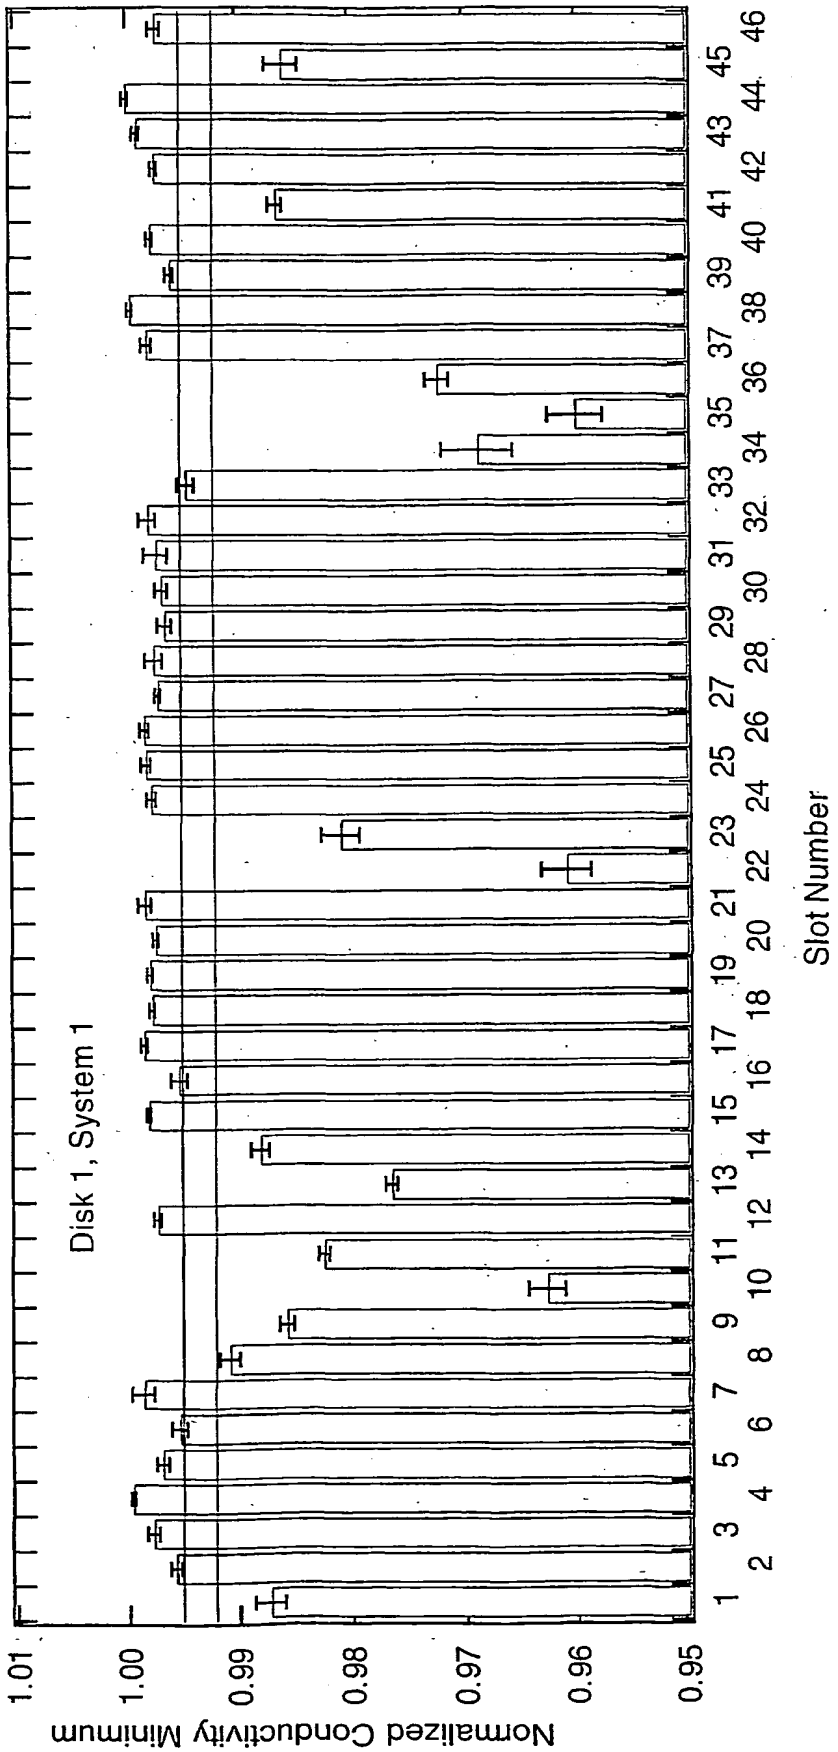
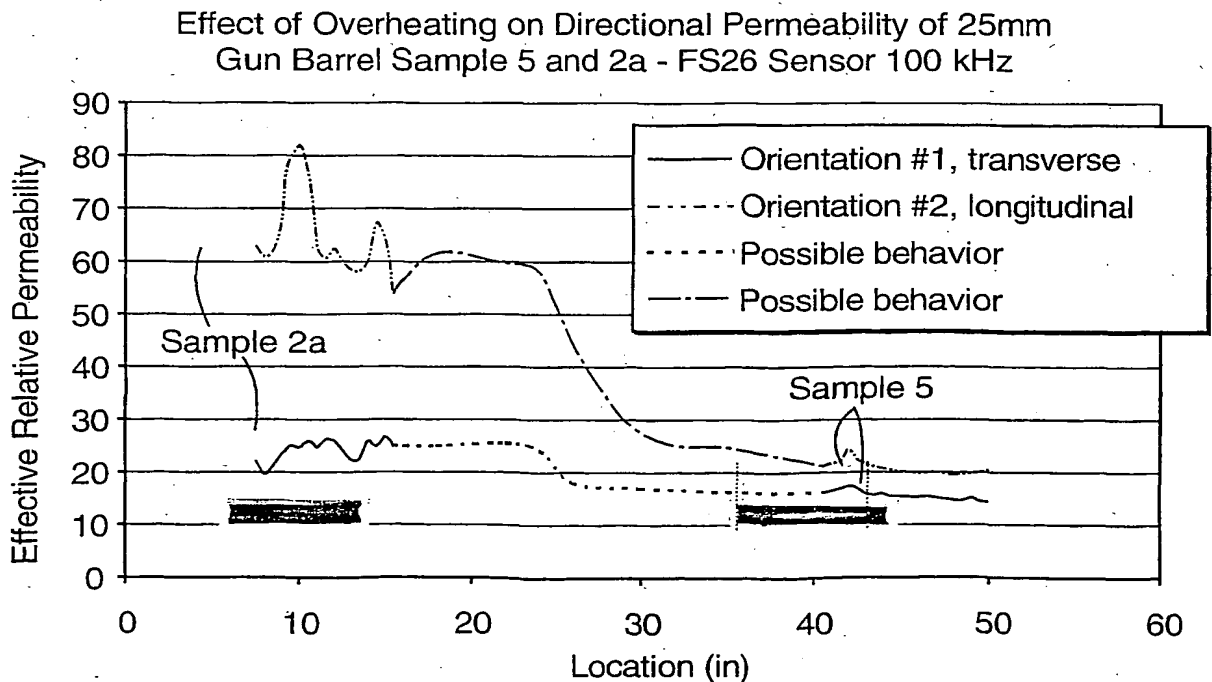
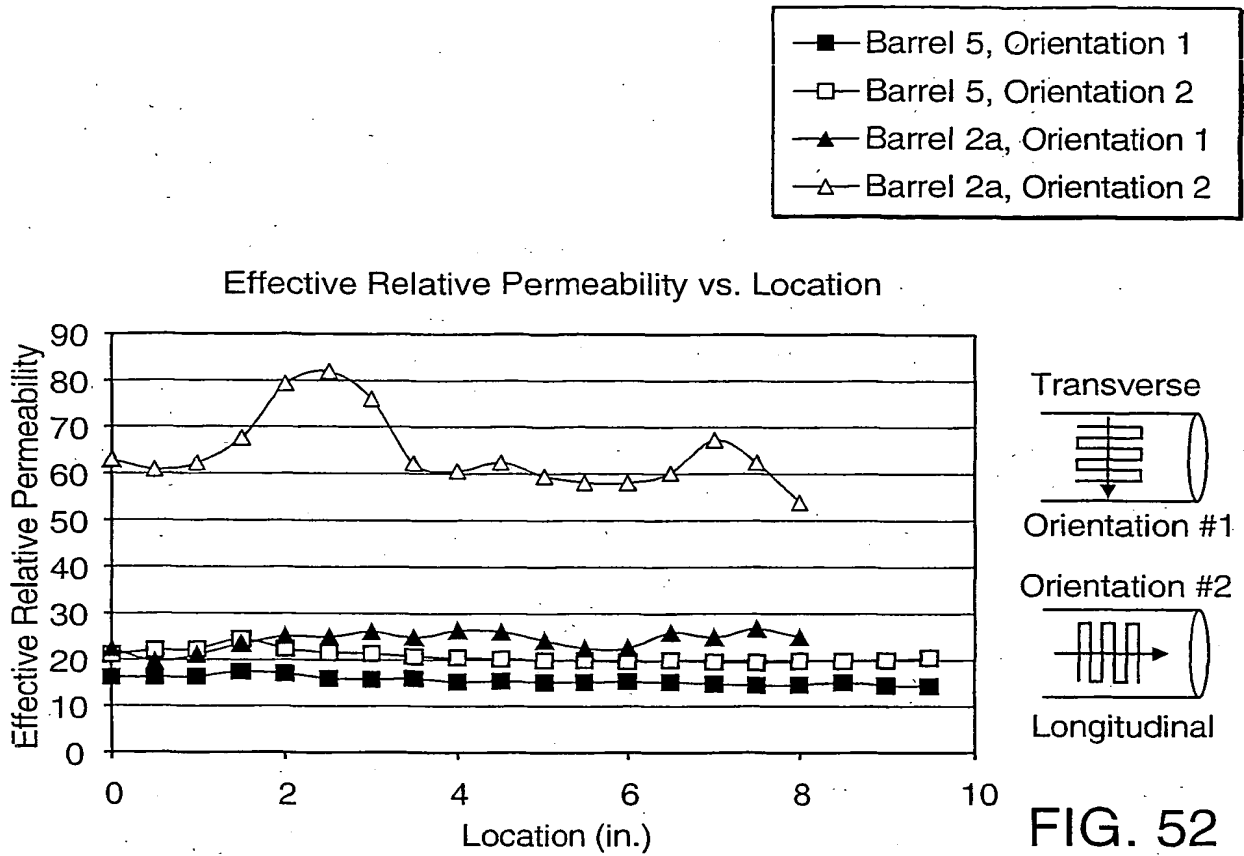


FIG. 51

62/64



63/64

FIG. 54a

FIG. 54b

FIG. 54c

FIG. 54d

FIG. 54

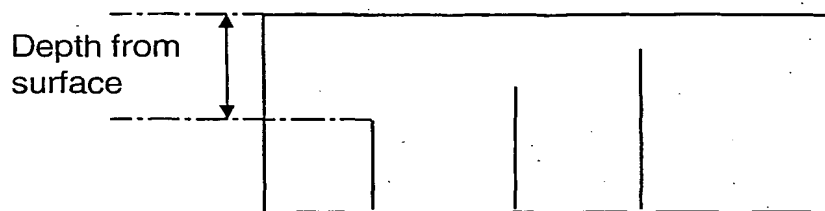


FIG. 54a

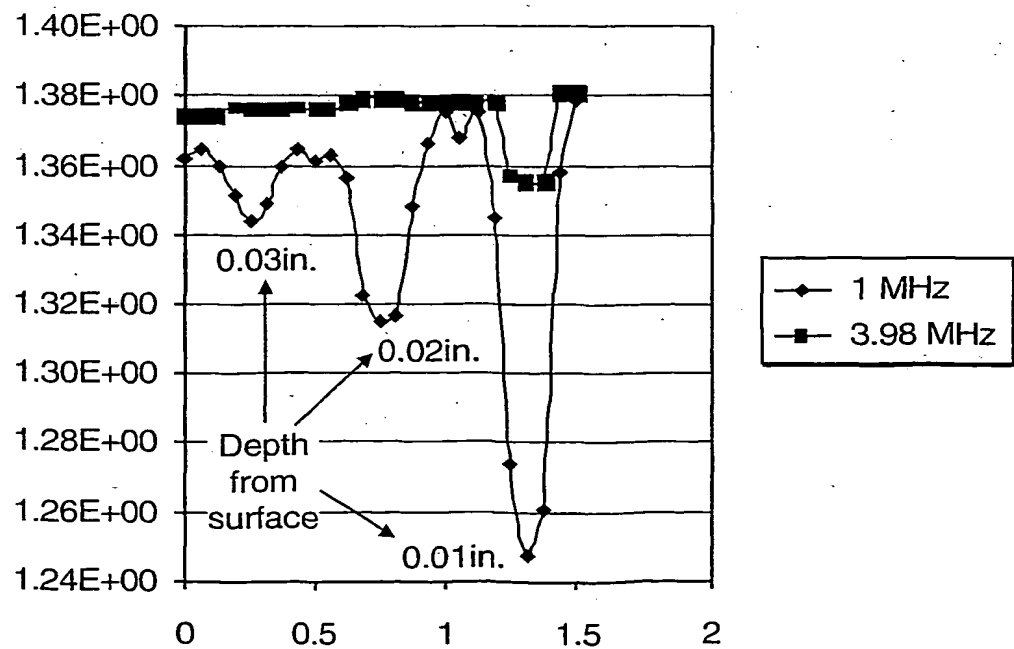


FIG. 54b

64/64

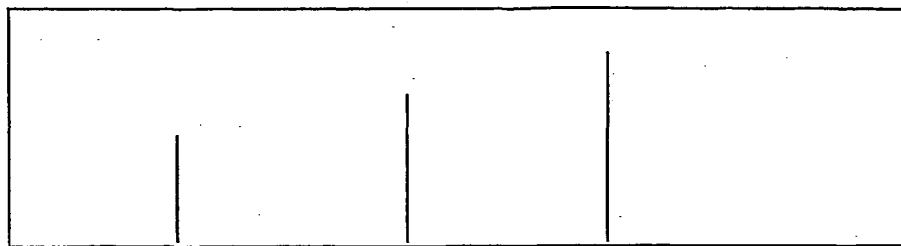


FIG. 54c

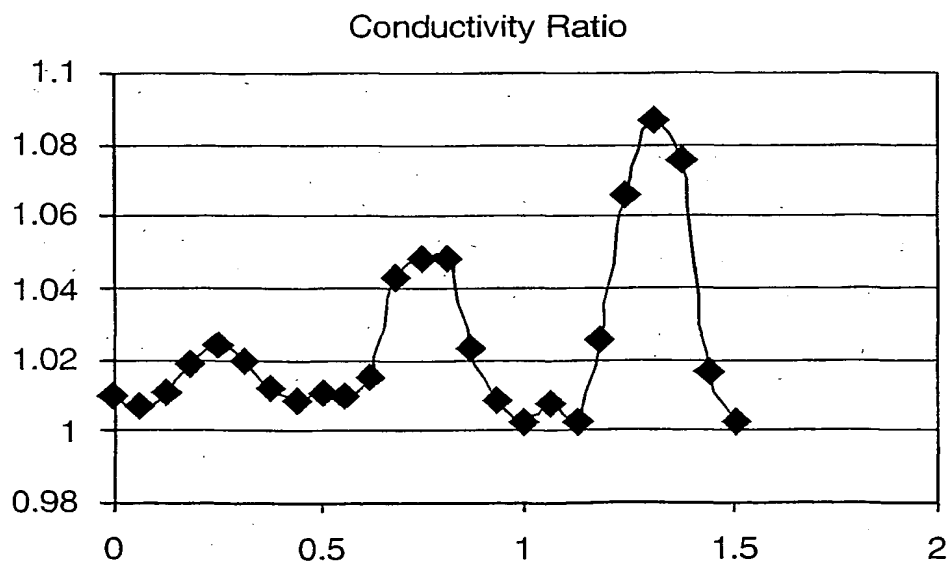


FIG. 54d

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/25690

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N27/90 G01B7/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N G01B G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 22231 A (SCHLICKEER DARRELL E ; WASHABAUGH ANDREW (US); GOLDFINE NEIL J (US);) 6 May 1999 (1999-05-06) the whole document	1-144
X	WO 98 40732 A (CLARK DAVID C ; GOLDFINE NEIL J (US); WALRATH KAREN E (US); WEISS V) 17 September 1998 (1998-09-17) the whole document	1-144
X	US 5 793 206 A (CLARK DAVID C ET AL) 11 August 1998 (1998-08-11) cited in the application the whole document	1-144
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

6 February 2001

Date of mailing of the international search report

14/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5318 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Meyer, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/25690

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages.	Relevant to claim No.
X	US 5 453 689 A (GOLDFINE NEIL J ET AL) 26 September 1995 (1995-09-26) cited in the application the whole document ----	1-144
P, X	US 5 966 011 A (CLARK DAVID C ET AL) 12 October 1999 (1999-10-12) the whole document ----	1-144
X	WO 98 30921 A (SCHLICHER DARRELL E ; ZAHN MARKUS (US); GOLDFINE NEIL J (US); RYAN) 16 July 1998 (1998-07-16) the whole document ----	1-144
X	WO 99 26062 A (CLARK DAVID C ; GOLDFINE NEIL J (US); RHOADS KEVIN G (US); WALRATH) 27 May 1999 (1999-05-27) the whole document ----	1-144
A	US 5 015 951 A (MELCHER JAMES R) 14 May 1991 (1991-05-14) cited in the application the whole document ----	1-144
A	EP 0 577 244 A (GEN ELECTRIC) 5 January 1994 (1994-01-05) the whole document ----	1-144
A	US 4 810 966 A (SCHMALL KARL-HEINZ) 7 March 1989 (1989-03-07) the whole document -----	1-144

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/25690

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9922231	A	06-05-1999	AU 1367199 A	17-05-1999
			EP 1027598 A	16-08-2000
WO 9840732	A	17-09-1998	AU 6760898 A	29-09-1998
			EP 0966676 A	29-12-1999
US 5793206	A	11-08-1998	US 5966011 A	12-10-1999
US 5453689	A	26-09-1995	CA 2125138 A	10-06-1993
			EP 1037043 A	20-09-2000
			EP 0615619 A	21-09-1994
			WO 9311426 A	10-06-1993
			US 5629621 A	13-05-1997
			US 5990677 A	23-11-1999
US 5966011	A	12-10-1999	US 5793206 A	11-08-1998
WO 9830921	A	16-07-1998	AU 6532898 A	03-08-1998
			EP 0954760 A	10-11-1999
			US 6144206 A	07-11-2000
WO 9926062	A	27-05-1999	AU 1405199 A	07-06-1999
US 5015951	A	14-05-1991	US 4814690 A	21-03-1989
			US RE36986 E	12-12-2000
			AT 100593 T	15-02-1994
			CA 1288477 A	03-09-1991
			DE 3887343 D	03-03-1994
			EP 0393068 A	24-10-1990
			JP 3502728 T	20-06-1991
			WO 8903047 A	06-04-1989
EP 0577244	A	05-01-1994	US 5315234 A	24-05-1994
			DE 69319504 D	13-08-1998
			DE 69319504 T	25-03-1999
US 4810966	A	07-03-1989	AT 39869 T	15-01-1989
			DE 3476035 D	16-02-1989
			EP 0130940 A	09-01-1985
			JP 1909759 C	09-03-1995
			JP 6017896 B	09-03-1994
			JP 60038648 A	28-02-1985

